



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" +/- .3" [7]
MRT2.5DLH-L4	50	2.5" [63]	20.7" [526]

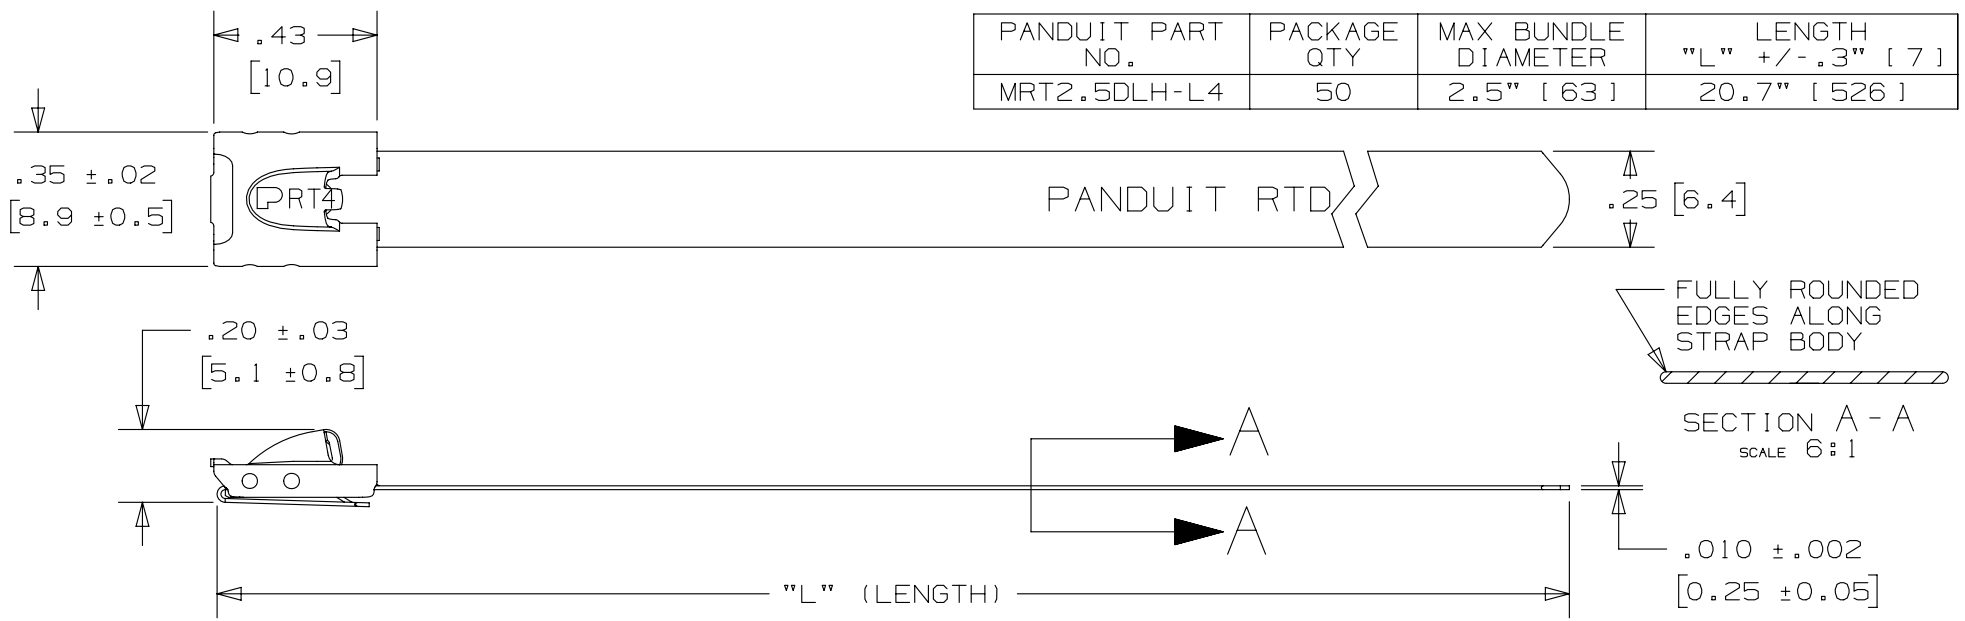

NOTES:

1. APPLICATION TOOLS - PTRT, MTRTLS or MTRTH (with KMTRTLS kit)
2. MINIMUM LOOP TENSILE STRENGTH - 350 lbs [1557 NEWTONS] WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS, AND ARE FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL



BODY WRAPS AROUND TWO TIMES ENTERING HEAD TWICE (NOT TO SCALE)

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	4/13	JAMB	MIM	---	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01056
03A	5/10	MIM	JJB	---	REVISED BODY TAB/SHEAR FORM DESIGN. ADDED TO NOTE #3: "AND ARE FOR REFERENCE ONLY"	-----
02A	9/09	JAMB	EJD	---	NOTE 2: MIN LOOP TENSILE WAS 365 lbs [1622 NEWTONS]	-----
01A	4/09	JAMB	EJD	---	UPDATE DRAWING TO REFLECT CUREENT PRODUCT PART. ADDED "PTRT" APPLICATION TOOL	-----
00A	12/07	JAMB	EJD	---	DRAWING RELEASED	-----

TITLE METAL TIE - LIGHT/HEAVY DOUBLE LOOP - RETAINED TENSION CUSTOMER DRAWING					
ITEM REVISION NAME			N41253BS/04		
DATASET FILE NAME			N41253BS_DC/04A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °					MATERIAL: 304 STAINLESS STEEL
DRAWN BY: JAMB DATE: 12/07 CHK: EJD SCALE: 2:1					DRAWING NUMBER: N41253BS_DC
				SHT 1 OF 1	A