THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
AD	14

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER 0G51-0008-99	06APR99	RB	DD
	D	REV PER 0G51-0062-99	05/18/99	MM	EL
	D1	REVISED ECR-09-010116	08MAY2009	AZ	SY
	D2	REVISED PER ECO-09-020689	31AUG09	KK	AEG

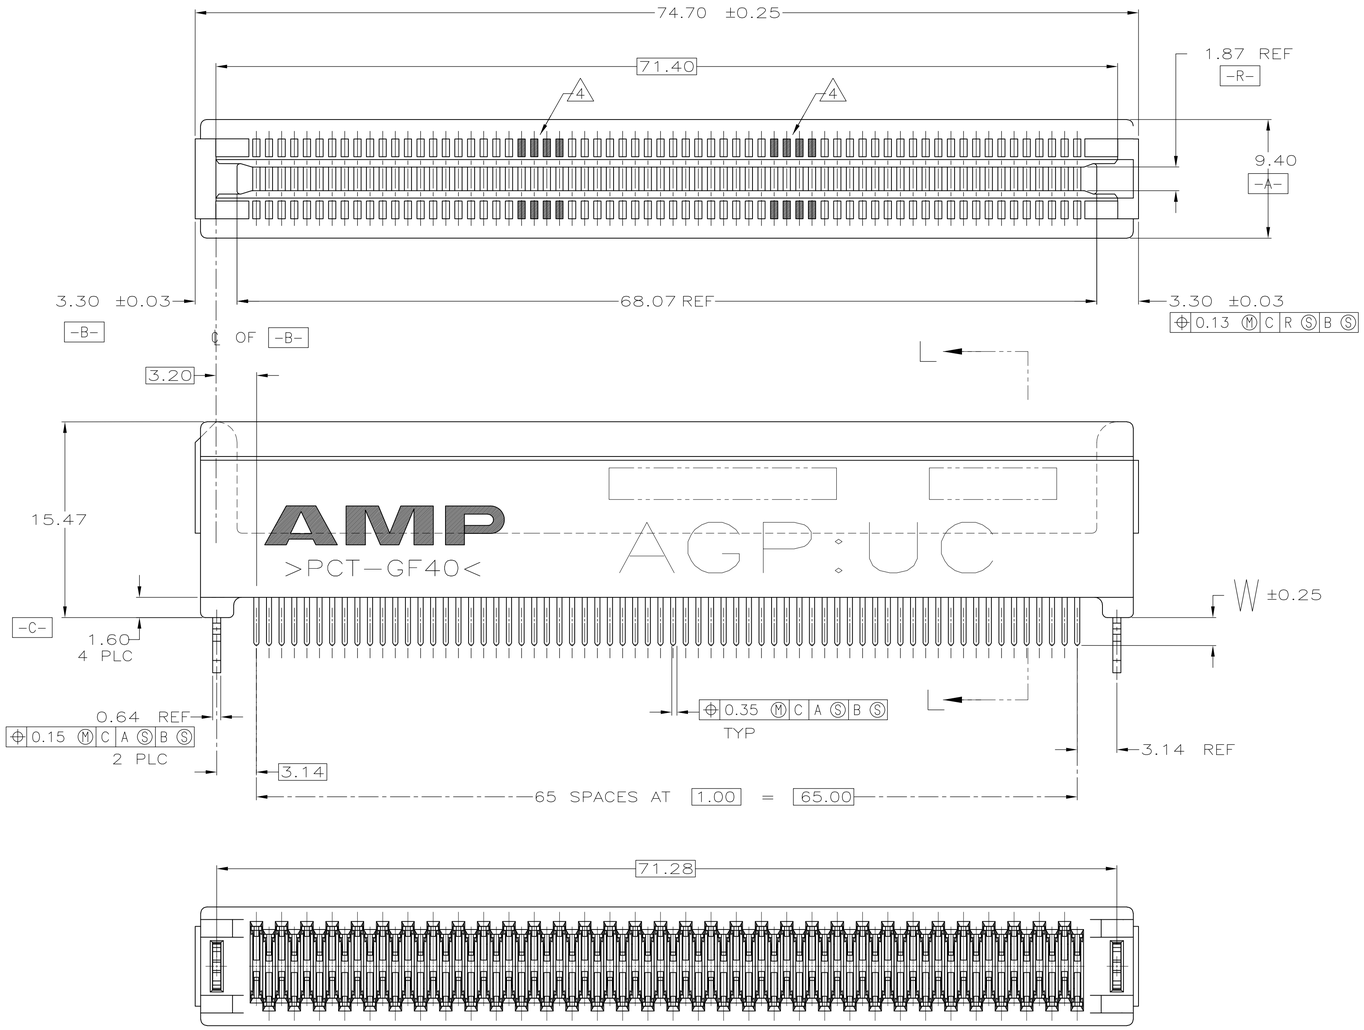



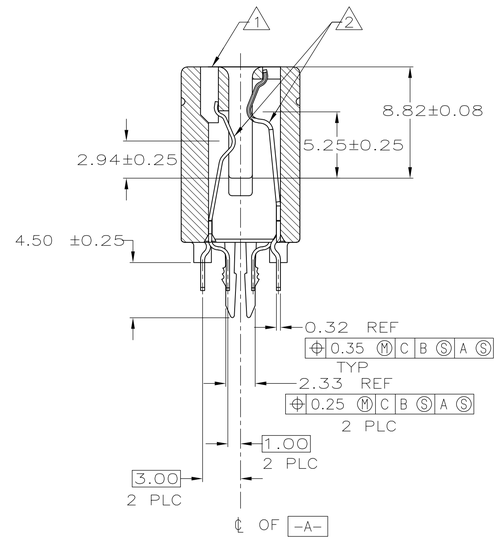

SECTION L—L

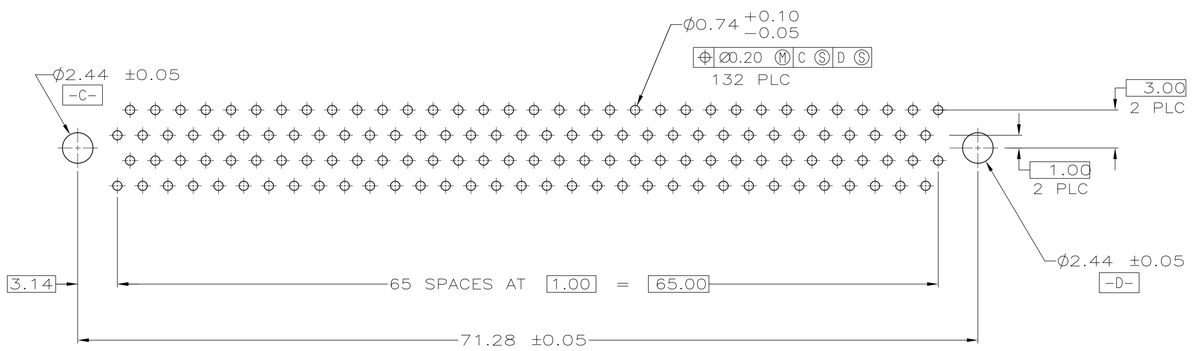

RECOMMENED CONNECTOR MOUNTING HOLE PATTERN
(CONNECTOR SIDE SHOWN)

1. MATERIAL: HOUSING, THERMOPLASTIC, COLOR: BROWN.
CONTACTS, PHOSPHOR BRONZE.
HOLD-DOWNS, BRASS.
2. FINISH: CONTACTS, 1.27 MIN. MICROMETERS NICKEL ALL OVER,
0.38 MIN. MICROMETERS GOLD OVER NICKEL IN CONTACT AREA,
2.54 MIN MICROMETERS TIN-LEAD OVER NICKEL ON SOLDER TAILS.
3. REFER TO INTEL ACCELERATED GRAPHICS PORT INTERFACE SPECIFICATION FOR RECOMMENDED MATING PAD PATTERNS FOR AGP 1X, 2X AND 4X BOARDS.
4. SHADED CONTACT LOCATIONS ARE AT RISK OF DAMAGE DURING MATING AND UNMATING WITH AGP-1X AND AGP-2X/4X CIRCUITS.
5. FINISH: CONTACTS, 1.27 MIN. MICROMETERS NICKEL ALL OVER,
0.0254-0.0762 MICROMETERS GOLD OVER NICKEL IN CONTACT AREA.
2.54 MIN. MICROMETERS TIN-LEAD OVER NICKEL ON SOLDER TAILS.
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

6 OBSOLETE	5	3.18	145376-6
6 OBSOLETE	5	2.54	145376-5
	2	3.18	145376-3
	2	2.54	145376-2
6 OBSOLETE	2	2.16	145376-1
	PLATING	W	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±2°

MATERIAL 1
FINISH 2 5

DWN	R BROWN	6/25/98
CHK	D DIXON	6/25/98
APVD	V RUMINSKI	6/25/98

PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -
CUSTOMER DRAWING

AMP Incorporated
Harrisburg, PA 17105-3608

NAME
ASSEMBLY, 132 POSITION
1mm, CARD EDGE CONNECTOR

SIZE	CAGE CODE	DRAWING NO
A1	00779	© 145376

SCALE 4:1 SHEET 1 OF 1 REV D2