

C3225X7R2E104M200AE

TDK Item Description : C3225X7R2E104MT***S



Application & Main Feature

Commercial Grade (Soft Termination)

Series

C3225 [EIA CC1210]



Dimensions

| | |
|---|--------------------|
| L | 3.20mm +0.5,-0.4mm |
| W | 2.50mm +/-0.3mm |
| T | 2.00mm +0.3,-0.2mm |
| B | 0.20mm Min. |
| G | |

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

2E (250Vdc)

Capacitance

100nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

3% Max.


Insulation Resistance

5Gohm Min


AEC-Q200

Not Applicable


**|Z|, ESR vs. Freq. Characteristics
(Simulation Data)**

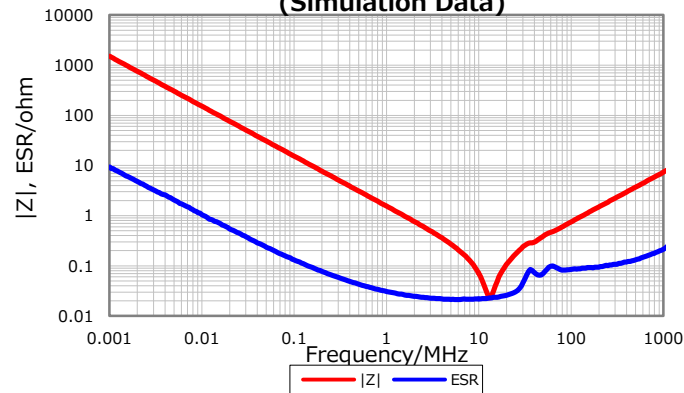


Cap. vs. Freq. Characteristic

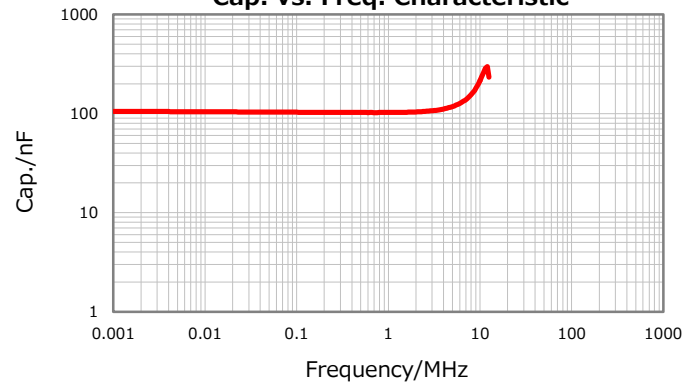


DC Bias Characteristic

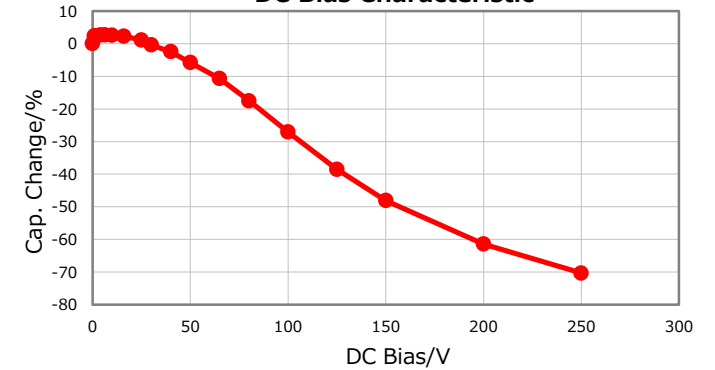

Temperature Characteristics

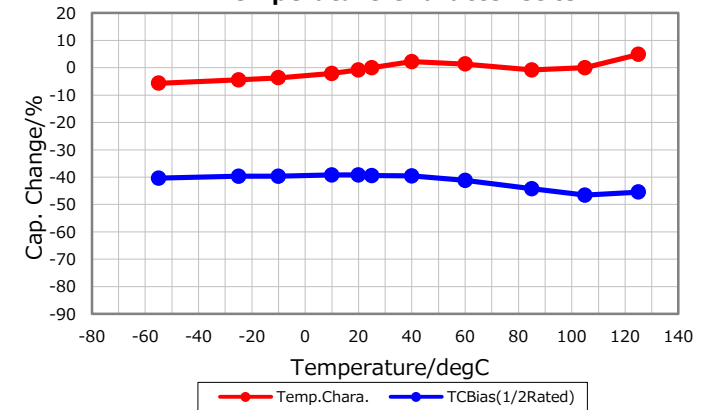

Ripple Temperature Rise Characteristics

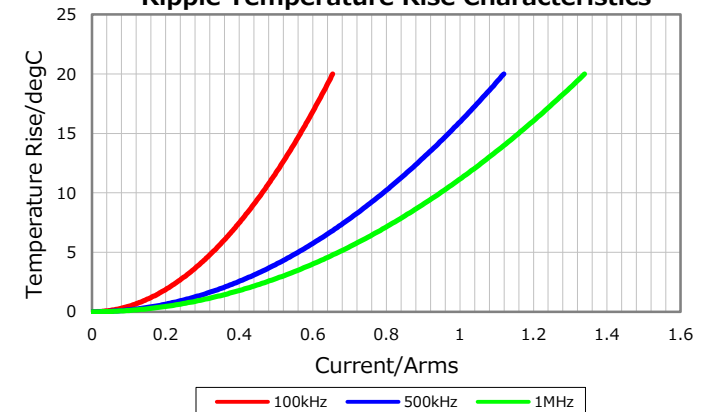

Characterization Sheet (Multilayer Ceramic Chip Capacitors)



All specifications are subject to change without notice.

March 16, 2017