
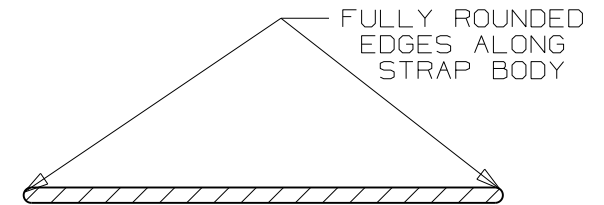
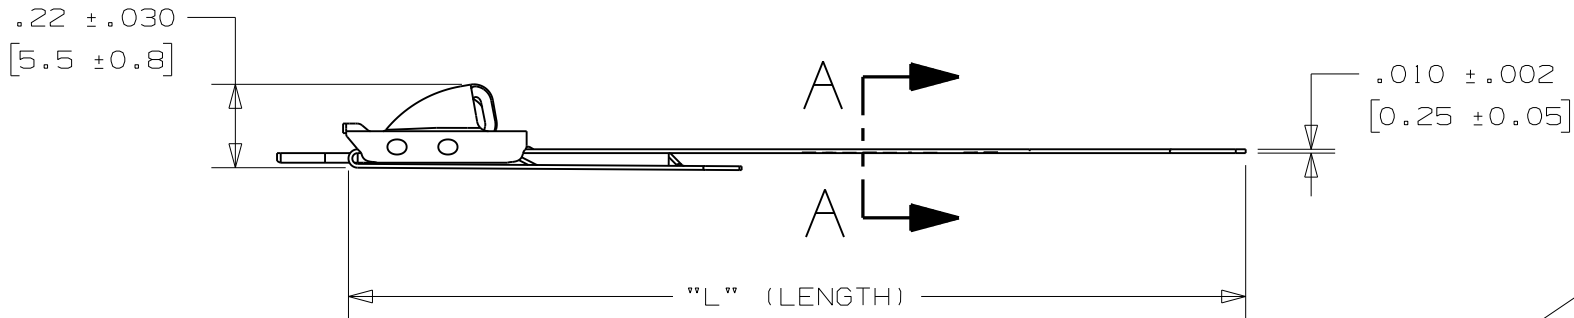


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" +/- .3" [7]
MRS1.5H-L6	50	1.5" [38]	10.6" (269)
MRS2H-L6	50	2.0" [51]	12.2" (310)
MRS4H-L6	50	4.0" [102]	18.5" (470)
MRS6H-L6	50	6.0" [152]	24.8" (630)

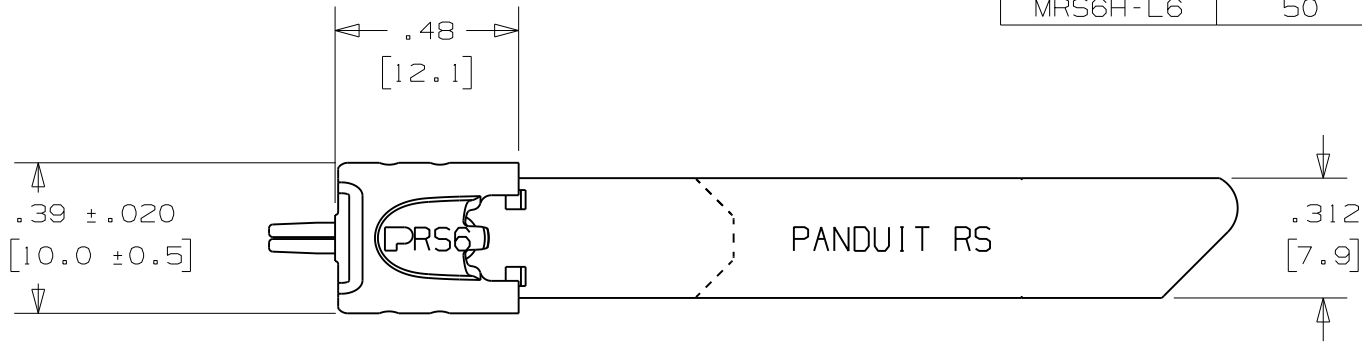


SECTION A - A
SCALE 8:1

NOTES:

- APPLICATION TOOLS - MTRTH & PTRT
- MINIMUM LOOP TENSILE STRENGTH - 400 LBS. (1780 NEWTONS) WHEN TESTED ON A 1.5" MANDREL
- [] DENOTES DIMENSION IN MILLIMETERS
- TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
- MATERIAL: 316 STAINLESS STEEL

REV	DATE	BY	CHK	DESCRIPTION
04A	10/09	MIM	SKB	REVISED PART LENGTHS FOR IMPROVED APPLICATION TOOL PERFORMANCE

TM



TINLEY PARK, ILLINOIS

METAL TIE - HEAVY SERIES
RETAINED TENSION - 360° RADIAL SEAL
316 STAINLESS STEEL - CUSTOMER DRAWING

DRAWN BY JAMB	CHK'D EJD	SCALE 2:1	DRAWING NO. N41228BS_DC
------------------	--------------	--------------	----------------------------