



8	.1000	.1100
7	.0860	.0950
6	.0760	.0810
5	.0690	.0740
4	.0610	.0660
3	.0520	.0570
2	.0450	.0500
1	.0360	.0410
SEL #	GO	NO-GO
	±.0001	±.0001

USE GAGE EUS309-G
AT SELECTOR # 4

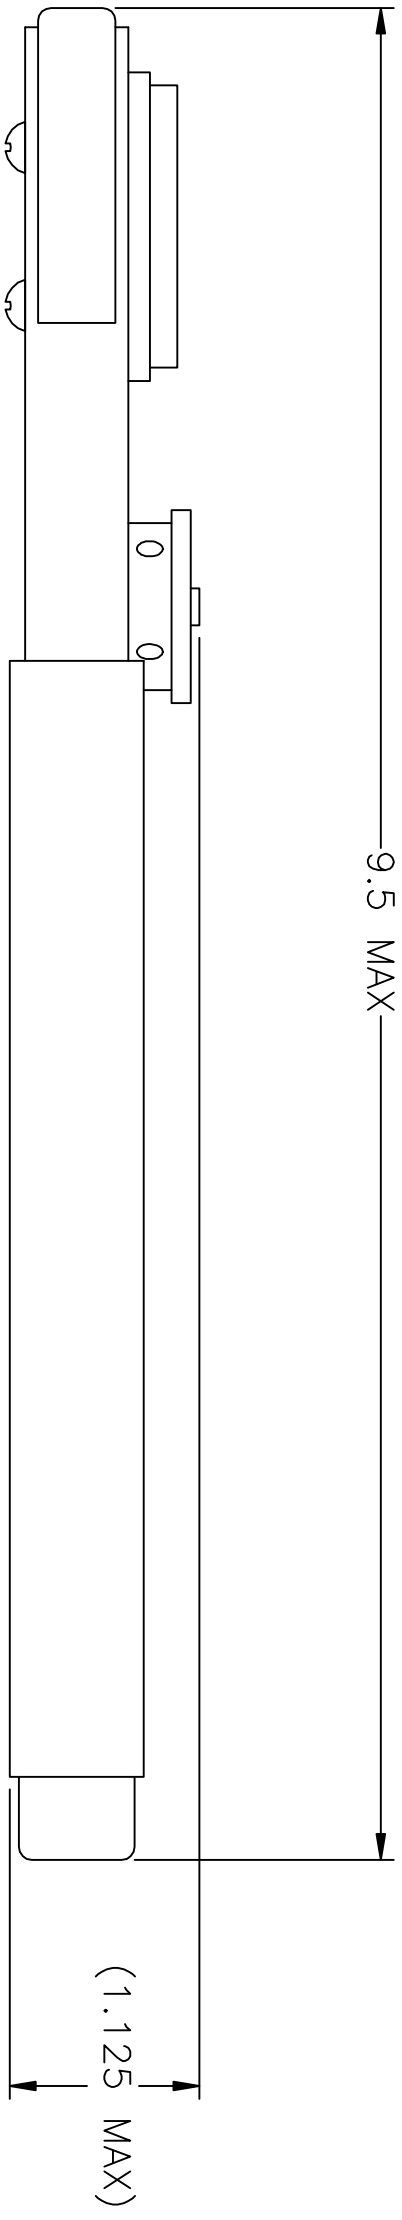

**UNCONTROLLED DOCUMENT
WILL NOT BE UPDATED**

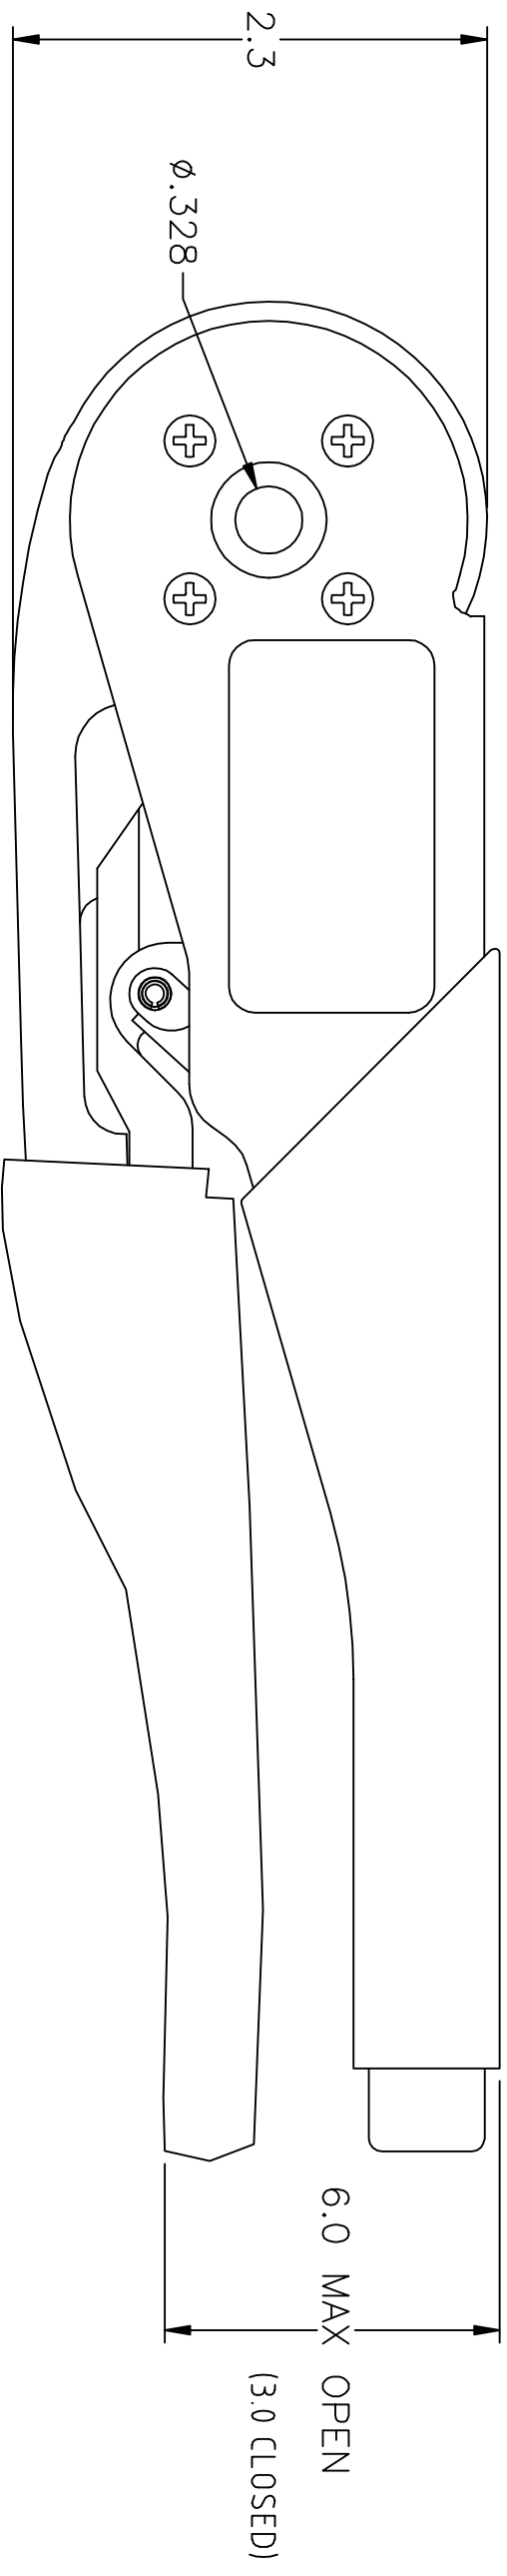

NOTES:
1. THIS IS AN AUTOCAD DRAWING DO NOT CHANGE MANUALLY.

REV.	DESCRIPTION	BY	DATE	APR.
A	NEW RELEASE	DY0	06-15-09	MMK

THESE DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE AND REMAIN THE PROPERTY OF ASTRO TOOL CORP. AND MUST BE RETURNED UPON REQUEST. THEY CONTAIN INFORMATION OWNED AND/OR DEVELOPED BY ASTRO AT ITS OWN PRIVATE EXPENSE AND MAY NOT BE USED, DUPLICATED OR DISCLOSED TO OTHERS, IN WHOLE OR IN PART FOR DESIGN, MANUFACTURE OR PROCUREMENT WITHOUT THE WRITTEN PERMISSION OF ASTRO TOOL CORP. EACH AND EVERY TIME.

SCALE: N.T.S.
DWN BY: DY0
DATE: 06-15-09
APPROVED:

UNLESS OTHERWISE SPECIFIED:
DECIMALS: XXX ± .005
XX ± .010
X ± .030
ANGLES: ± 1°

ASTRO TOOL CORP.
21615 S.W. TUALATIN VALLEY HWY., BEAVERTON OR 97006

CAGE 58164

DESCRIPTION: ENVELOPE DRAWING: EUS309
CRIMP TOOL 8-STEP ADJUSTABLE

PART NO. B EUS309-ENV