


PART NUMBER DATA


CIRCUITS	PART NUMBER	ENGINEERING NUMBER	COLOR	A IN mm		B IN mm	
2	397007502	M710-01-02-9	LT GRAY	.33	8.5	.138	3.50
3	397007503	M710-01-03-9	LT GRAY	.47	12.0	.276	7.00
4	397007504	M710-01-04-9	LT GRAY	.61	15.5	.413	10.50
5	397007505	M710-01-05-9	LT GRAY	.75	19.0	.551	14.00
6	397007506	M710-01-06-9	LT GRAY	.89	22.5	.689	17.50
7	397007507	M710-01-07-9	LT GRAY	1.02	26.0	.827	21.00
8	397007508	M710-01-08-9	LT GRAY	1.16	29.5	.965	24.50
9	397007509	M710-01-09-9	LT GRAY	1.30	33.0	1.102	28.00
10	397007510	M710-01-10-9	LT GRAY	1.44	36.5	1.240	31.50
11	397007511	M710-01-11-9	LT GRAY	1.58	40.0	1.378	35.00
12	397007512	M710-01-12-9	LT GRAY	1.71	43.5	1.516	38.50
13				1.85	47.0	1.653	42.00
14				1.99	50.5	1.791	45.50
15				2.13	54.0	1.929	49.00
16				2.27	57.5	2.067	52.50
17				2.40	61.0	2.205	56.00
18				2.54	64.5	2.342	59.50
19				2.68	68.0	2.480	63.00
20				2.82	71.5	2.618	66.50
21				2.95	75.0	2.756	70.00
22				3.09	78.6	2.894	73.50
23				3.23	82.1	3.031	77.00
24				3.37	85.6	3.169	80.50

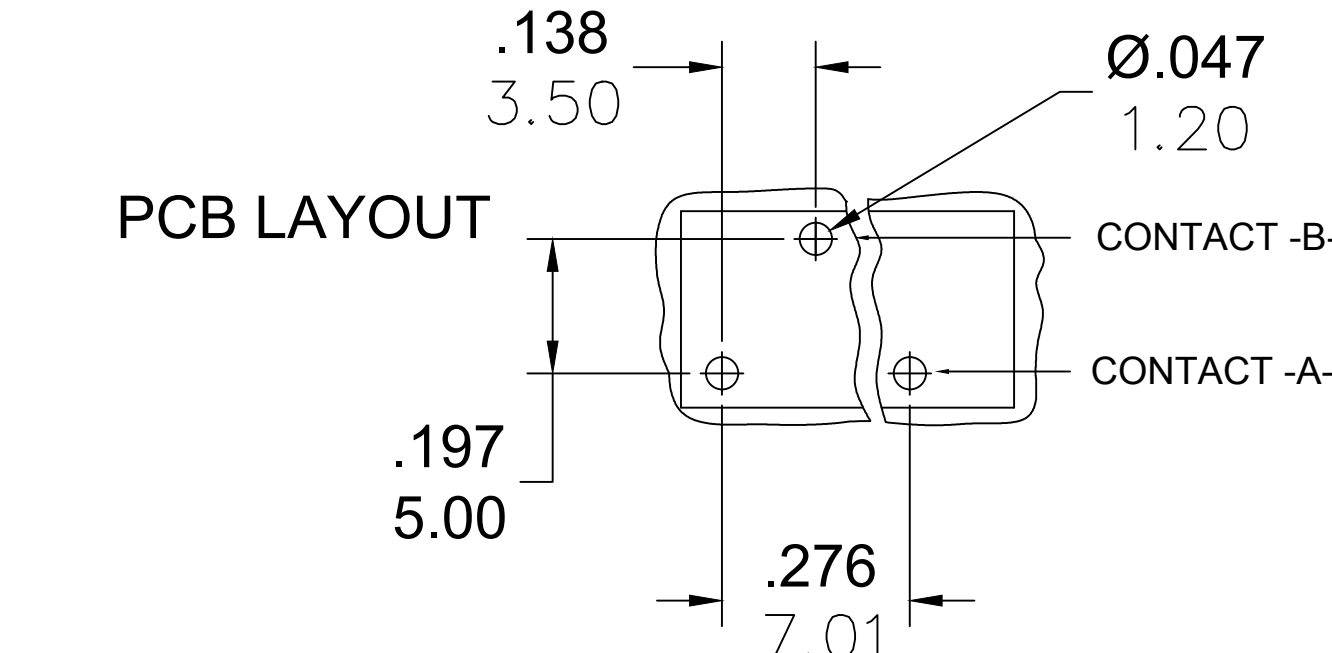

REF. LAST 2 DIGITS OF PART NUMBER EQUALS CIRCUIT COUNT

CONTACT FACTORY FOR OPTIONAL LENGTHS & COLORS

ENGINEERING NUMBER LEGEND

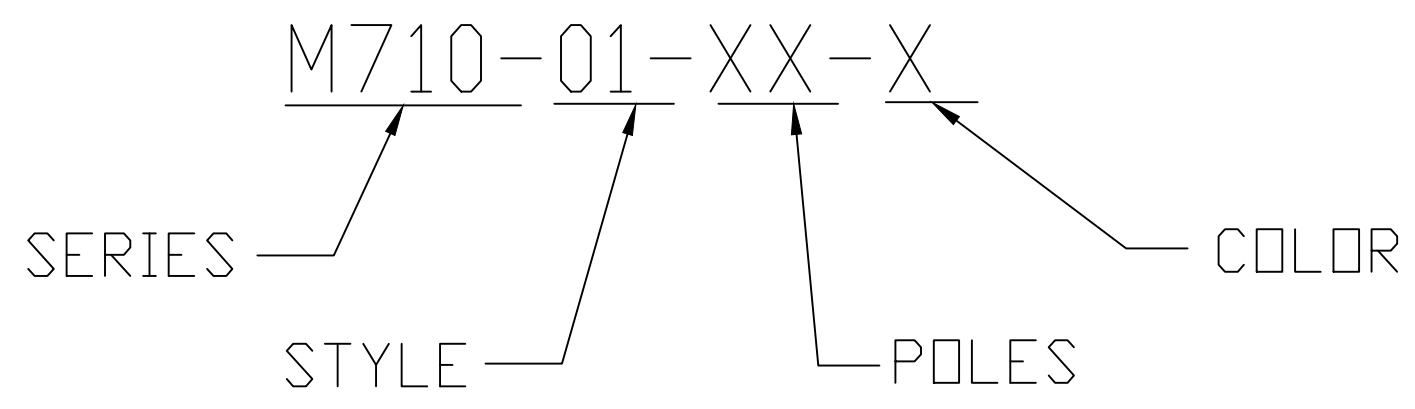

SPECIFICATIONS:

- MATERIAL:
 - A. BUTTON: PA66 UL94 V-0
 - B. BODY : PA66 UL94 V-0
 - C. TERMINAL: PHOS-BRONZE, TIN PLATED
 - D. COVER: PA66 UL94 V-0
- WIRE SIZE: 20 - 16AWG (SOLID)
- ELECTRICAL RATING (UL): 300V, 5A
- WIRE STRIP LENGTH: .31 (8.0mm)
- POWER FREQUENCY WITHSTAND: AC 2000V FOR 1 MINUTE
- INSULATION RESISTANCE: DC 500V, 500MΩ
- RATED IMPULSE VOLTAGE: 2500V PLUS AND MINUS 5 TIMES EACH
- OPERATING TEMPERATURE: -40°C TO +105°C
- MAX. SOLDERING TEMP: 260°C (500°F) FOR 5 SECONDS
- DIMS SHOWN ARE FOR REFERENCE ONLY

TOLERANCES

MM	TOL	INCH	TOL
0-6	±0.25	0-24	±0.010
>6-30	±0.40	0.24-1.18	±0.016
>30-120	±0.50	1.18-4.76	±0.020
>120	±0.80	>4.76	±0.031

EC DESCRIPTION EC NO.: PG2017-0457 DRWN: RSTONE 2014/02/25 CHKD: GFARNS APPR: ---	QUALITY SYMBOL	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	IN/MM	---	METRIC	
	∇=0	DRAWN BY DATE	TITLE		
		RSTONE 2014/02/25	SPRING TERMINAL BLOCK .138 (3.50) PITCH 45 DEG DUAL ROW MODULA		
		CHECKED BY DATE	MOLEX INCORPORATED		
	G.FARNS	MATERIAL NO. SEE TABLE			
	APPROVED BY DATE	DOCUMENT NO. SD-39700-012		SHEET NO. 1 OF 1	
	---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
REV	SIZE C				