

## UPM-EA SERIES - PROGRAMMABLE, 45 WATT


### DESCRIPTION

The UPM-EA programmable DC/DC converter is a high efficiency, step-down converter. The UPM-EA incorporates a 5-bit DAC output voltage control which is compliant with standard VRM VID Protocol. The UPM-EA provides up to 45 Watts of output power at 13A output current, and at output voltages from 1.30 to 3.50V. Featuring open-frame, 100% surface-mount construction and high efficiency topology, the UPM-EA excels in difficult thermal environments.


- 5-Bit Programmable Output
- High Efficiency Topology
- Excellent Transient Response
- Power Good Signal
- Surface-Mount Construction
- Short Circuit Protection
- Low Profile
- Water Washable

### TECHNICAL SPECIFICATIONS

Input	
Voltage Range	4.5 - 5.5 VDC
5 VDC Nominal	3.6 - 4.4 VDC
Input Undervoltage Lockout, Power On	3.15 - 3.85 VDC
Input Undervoltage Lockout, Power Down	10 ms
Startup Time	

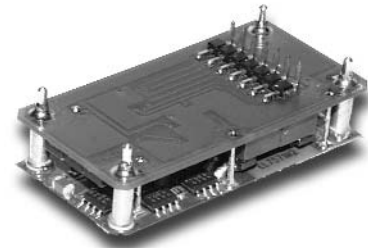

Output	
Setpoint Accuracy	See Output Voltage Table
Line Regulation $V_{in}$ Min. - $V_{in}$ Max., $I_{out}$ Rated	See Output Voltage Table
Load Regulation $I_{out}$ Min. - $I_{out}$ Max., $V_{in}$ Nom.	See Output Voltage Table
Ripple and Noise, DC - 20 MHz <sup>††</sup>	50 mV Pk-Pk
Current Limit Protection Type	Hiccup
Current Limit Threshold Range, % of $I_{out}$ Rated	130%
Short Circuit Protection Type	Hiccup
Power Good Signal Characteristics	
Asserts Logic "High" When $V_{out}$ is Between Following Levels	
Lower Threshold, % $V_{out}$ Programmed	-16% to -10%
Upper Threshold, % $V_{out}$ Programmed	+10% to +16%

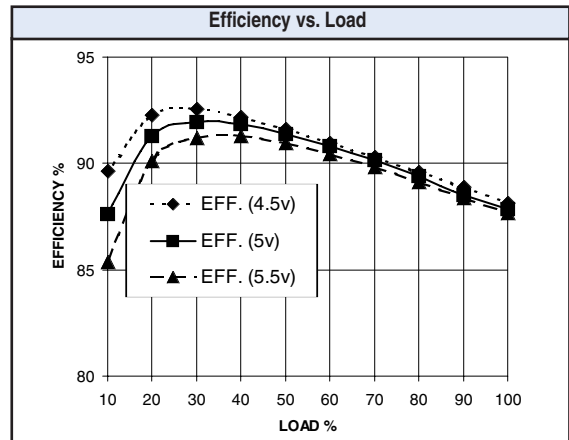

General	
Switching Frequency	200 kHz
Temperature Coefficient	50ppm/°C
Baseplate Operating Temperature	0 to +100°C
Storage Range	-40 to +100°C
Internal Input Capacitance	500 mF Max.
Recommended External Capacitance	
Input	100 mF/A $I_{out}$
Output	100 mF/A $I_{out}$
MTBF <sup>†</sup> (Bellcore TR-NWT-000332)	2.9 x 10 <sup>6</sup> hrs
Safety	UL, CSA
Weight (approx.)	0.9 oz


Notes
† MTBF predictions may vary slightly from model to model.
†† When used with recommended capacitors
Specifications typically at 25°C, normal line, and full load, unless otherwise stated.
Soldering Conditions: I/O pins, 260°C, ten seconds; fully compatible with commercial wave-soldering equipment.
Safety: Agency approvals may vary from model to model. Please consult factory for specific model information.
Units are water-washable and fully compatible with commercial spray or immersion post wave-solder washing equipment.

## UPM-EA SERIES - PROGRAMMABLE, 45 WATT

P4	P3	P2	P1	P0	Output Voltage	Total Error Band
1	1	1	1	1	0.00	±24 mV
0	1	1	1	1	1.30	±24 mV
0	1	1	1	0	1.35	±24 mV
0	1	1	0	1	1.40	±24 mV
0	1	1	0	0	1.45	±24 mV
0	1	0	1	1	1.50	±24 mV
0	1	0	1	0	1.55	±24 mV
0	1	0	0	1	1.60	±24 mV
0	1	0	0	0	1.65	±24 mV
0	0	1	1	1	1.70	±24 mV
0	0	1	1	0	1.75	±24 mV
0	0	1	0	1	1.80	±24 mV
0	0	1	0	0	1.85	±24 mV
0	0	0	1	1	1.90	±24 mV
0	0	0	1	0	1.95	±24 mV
0	0	0	0	1	2.00	±24 mV
0	0	0	0	0	2.05	±24 mV
1	1	1	1	0	2.10	±24 mV
1	1	1	0	1	2.20	±24 mV
1	1	1	0	0	2.30	±24 mV
1	1	0	1	1	2.40	±24 mV
1	1	0	1	0	2.50	±25 mV
1	1	0	0	1	2.60	±26 mV
1	1	0	0	0	2.70	±27 mV
1	0	1	1	1	2.80	±28 mV
1	0	1	1	0	2.90	±29 mV
1	0	1	0	1	3.00	±30 mV
1	0	1	0	0	3.10	±31 mV
1	0	0	1	1	3.20	±32 mV
1	0	0	1	0	3.30	±33 mV
1	0	0	0	1	3.40	±34 mV
1	0	0	0	0	3.50	±40 mV

Note: Logic "0" < 1.5V; Logic "1" > (Vin - 1.5V).  
Total Error Band Includes initial setpoint accuracy, line, and load regulation.

### MECHANICAL DRAWING

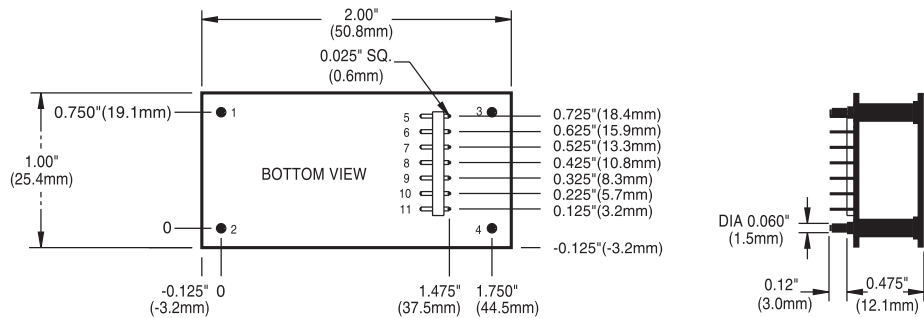

Thermal Impedance	
Natural Convection	9.4 °C/W
100 LFM	6.6 °C/W
200 LFM	4.3 °C/W
300 LFM	3.2 °C/W
400 LFM	2.7 °C/W

Note:  
Thermal impedance data is dependent on many environmental factors. The exact thermal performance should be validated for specific application.

Pin	Function
1	-Vin
2	+Vin
3	-Vout
4	+Vout
5	P4
6	P3
7	P2
8	P1
9	P0
10	Ground
11	Power Ground

Tolerances	
Inches:	(Millimeters)
.XX ± 0.020	.X ± 0.5
.XXX ± 0.010	.XX ± 0.25
Pin:	
± 0.002	± 0.05
(Dimensions as listed unless otherwise specified.)	

## OPTIONS

When ordering equipment options, use the following suffix information. Select the option(s) that you prefer and add them to the model number. Example ordering options are located below the options table.

OPTION	SUFFIX	APPLICABLE SERIES	REMARKS
Negative Logic	N	HAS, HBD, HBS, HES, HLS, HLD, LES, QBS, QES, QLS, TES, TQD	TTL "Low" Turns Module ON TTL "High" Turns Module OFF
Lucent-Compatible Trim	T	HAS, HBD, HBS, HES, HLS, QBS, QES, QLS	
Terminal Strip	TS	XWS, XWD, XWT	
Trim	1	IAS, LES	
Enable	2	IAD, IAS, LES, SMS	
Trim and Enable	3	IAS, LES	
<b>Pin Length and Heatsink Options</b>			Standard Pin Length is 0.180" (4.6mm)
0.110" (2.8mm) Pin Length	8	All Leaded Models	
0.150" (3.8mm) Pin Length	9	All Leaded Models	
0.24" (6.1mm) Horizontal Heatsink	1H	All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages)	Includes Thermal Pad
0.24" (6.1mm) Vertical Heatsink	1V	All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages)	Includes Thermal Pad
0.45" (11.4mm) Horizontal Heatsink	2H	All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages)	Includes Thermal Pad
0.45" (11.4mm) Vertical Heatsink	2V	All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages)	Includes Thermal Pad
0.95" (24.1mm) Horizontal Heatsink	3H	All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages)	Includes Thermal Pad
0.95" (24.1mm) Vertical Heatsink	3V	All 1/4-Bricks, 1/2-Bricks, 3/4-Bricks, Full-Bricks (Except HLS, HLD, QLS, TLD, and TKD Packages)	Includes Thermal Pad

**Example Options:**

HBS050ZG-ANT3V = HBS050ZG-A with negative logic, Lucent-compatible trim, and 0.95" vertical heatsink.

LES015YJ-3N = LES015YJ with optional trim and enable, negative logic.

QBS066ZG-AT8 = QBS066ZG-A with Lucent-compatible trim and 0.110" pin length.

---

**NUCLEAR AND MEDICAL APPLICATIONS** - Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the respective divisional President of Power-One, Inc.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

---