


DESCRIPTION: 2MM SHUNT LOW PROFILE, .075" TIN/LEAD

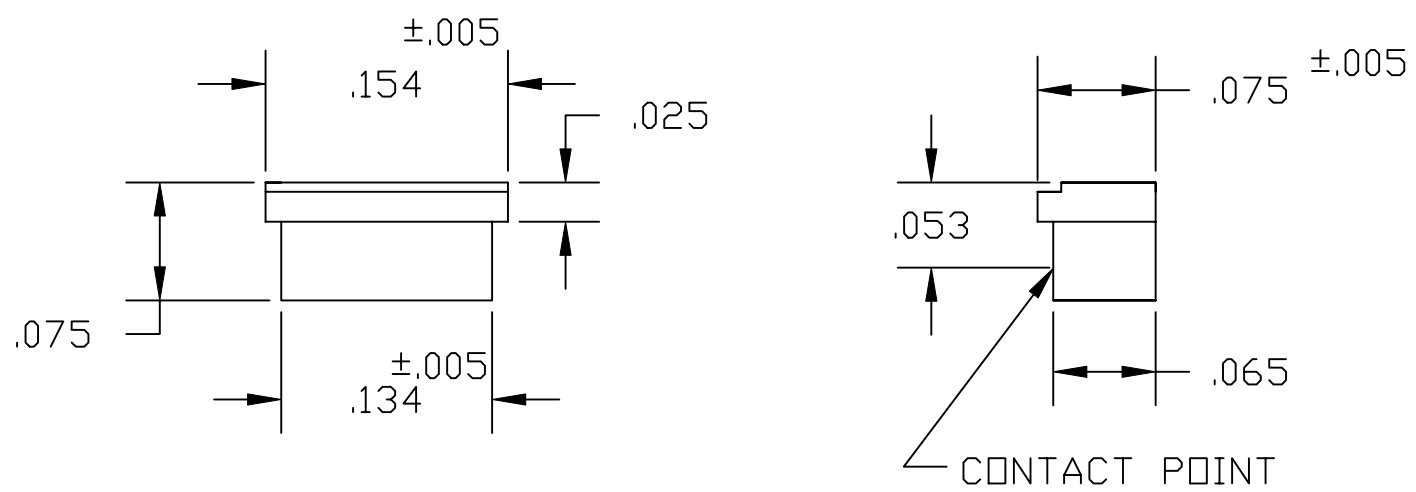

MATERIAL: HOUSING: GLASS FILLED THERMOPLASTIC, UL 94V-0, BLACK- 260°C PROCESS TEMP.

CONTACT: HIGH PERFORMANCE COPPER ALLOY

PLATING: TIN/LEAD ALL OVER

RoHS COMPLIANT


ELECTRICALS: CURRENT RATING: 1.0 AMPERE MAX.

CONTACT RESISTANCE: 30 MILLIOHM MAX.

DMV: 500 V_{rms} MIN.

INSULATION RESISTANCE: 1 X 10⁴ MOHMS

OPERATING TEMP: -55°C TO 105°C

| | | | | |
|--|---|-------------------------|-----------------------|-------------------|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | DRAWN: PAM JENKINS | DATE: 12-13-01 |
| | | | CHECKED: | DATE: |
| <h1>NorComp</h1> | | SCALE: | SHEET 1 OF 1 | REV 1 |
| | | DWG NO. 810-002-LP1R006 | | |