


Cost optimized pulse transformers for THT mounting, short rise time



### Description

- High insulation rating (>2.2 kVAC) between the primary and the secondary windings
- Small coupling capacitances between primary and secondary windings limit transient feedback from the power supply side to the control electronics
- Cost optimized design
- The defined partial discharge voltage guarantees an effectively unlimited serviceable life

### Standards

- VDE 110b

### Applications

- Galvanic separation of drive- and power-circuit
- Mainly used in ignition circuits with Thyristors, Triacs, power transistors and IGBT's
- DC/DC converters
- Line coupling transformers in high speed data transmission

### Weblinks

[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

Rated voltage	up to 500 VAC
Voltage Time Integral	150 - 300 Vμs
Pulse Rise Time	0.1 - 0.3 μs
Turns Ratio	1:1, 2:1, 3:1, 1:1:1
Terminal Type	THT
Weight	7 g
Material: Housing	UL 94V-0
Sealing Compound	UL 94V-0


Climatic Category	25/100/21 acc. to IEC 60068-1
Allowable Operation Temp.	-25 °C to 70 °C

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)


### Dimension

Case 05-7

Case 05-8

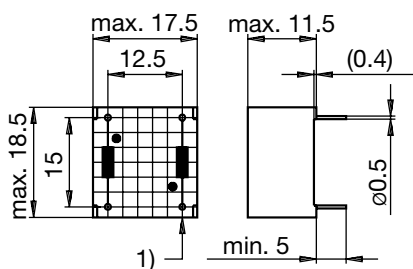

1) Prim.

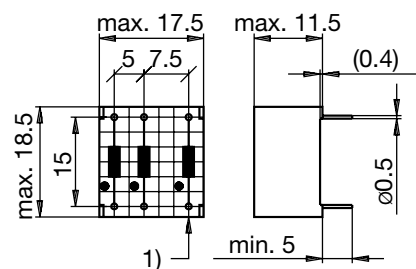

1) Prim.

### All Variants

Turns Ratio	$T_r$ [μs]	$I_{ign}$ [A]	$U_{VAC}$ [V]	$U_{isol}$ [kV]	$U_s \times T_w$ [Vμs]	$L_s$ [mH]	$R_p$ [Ω]	$R_s$ [Ω]	$C_c$ [pF]	$P_m$ [W]	Weight [g]	Packing unit [pcs.]	Housings	Order Number
1:1	0.2	1.0	500	3.2	300	2.5	0.7	0.7	60	0.5	7 g	50	05-7	<a href="#">ILR-11-0001</a>
1:1:1	0.1	0.25	500	3.2	150	0.5	0.3	0.3	30	0.5	7 g	50	05-8	<a href="#">ILR-10-0001</a>
2:1	0.3	1.0	500	3.2	200	2.5	1	0.3	50	0.5	7 g	50	05-7	<a href="#">ILR-11-0002</a>
3:1	0.3	1.0	500	3.2	200	5.0	1.2	0.3	40	0.5	7 g	50	05-7	<a href="#">ILR-11-0003</a>

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

