
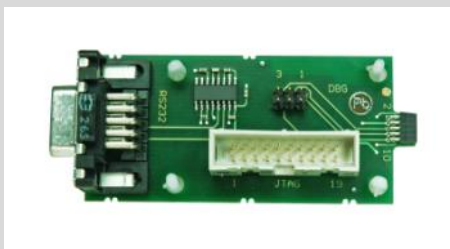




## Adapters

<b>JTAG Adapter (Part No. 27863)</b>		
Dimensions	23 x 22 mm	
IP protection	IP00	
Connections	30 pin ribbon cable (JTAGICE mkII) 10 pin serial connector (2-rowed, 1.27 mm pitch)	
<b>SAM ICE Adapter (Part No. 28337)</b>		
Dimensions	82 mm (with connector) x 35 mm	
IP protection	IP00	
Operating temperature	0°C ... 65°C	
Power supply	over USB	
Connections	RS232, JTAG, deUSB Target	
<b>deRFtoRCB Adapter (Part No. 28216)</b>		
Dimensions	52 x 52 mm	
Control and display elements	3 x LED (red), 1 x button	
Power supply	2 batteries, size AAA (1.8 - 3.6 VDC)	
Connections	2 x 23 pin serial connector (for deRFmega128) 2 x 30 pin I/O connector (for STB) 1 x 10 pin I/O connector (JTAG) 1 x 6 pin I/O connector (Debug/Trace)	
Interfaces	1 x JTAG, 1 x Debug/Trace	
<b>RCB Breakout Board RS232 Cable (Part No. 26790)</b>		
Length	300 mm	
Interfaces	SUB D 9 3 pin serial connector	

