

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



|  |  |
|--|--|
| Material                                       | High Conductivity Seamless Copper Tube   |
| Plating  | Electro-Tin  |
| Wire Size                                      | 8 AWG  |
| Wire Type                                      | Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric   |
| Wire Strip Length                              | 1/2 in.  |
| Stud Size                                      | #10  |
| UL Listed Wire Connector                       | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. |
| UL Temperature Rating                          | 90° C  |
| C.S.A Certified Wire Connector                 | Yes  |
| Panduit Color Code on Barrel                   | RED  |
| Panduit Die Index No. on Barrel                | P21  |
| Alternate Industry Die Index No. ( ) on Barrel | N/A  |



CERTIFIED



LISTED Wire Connector

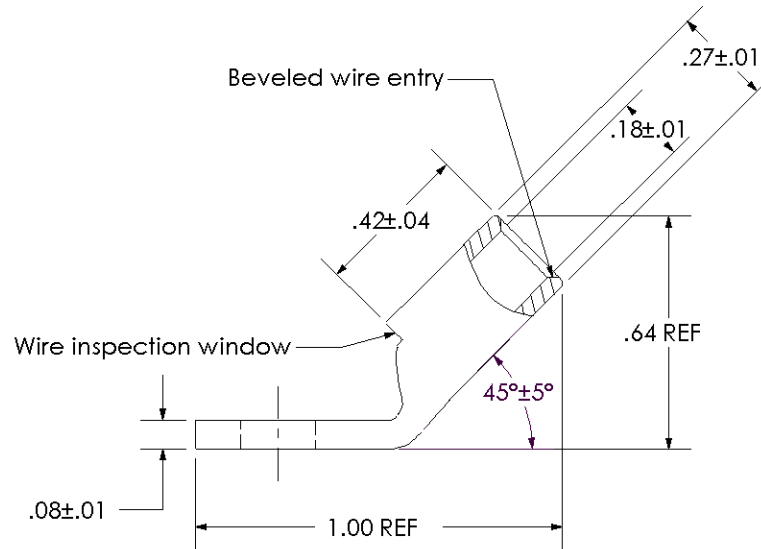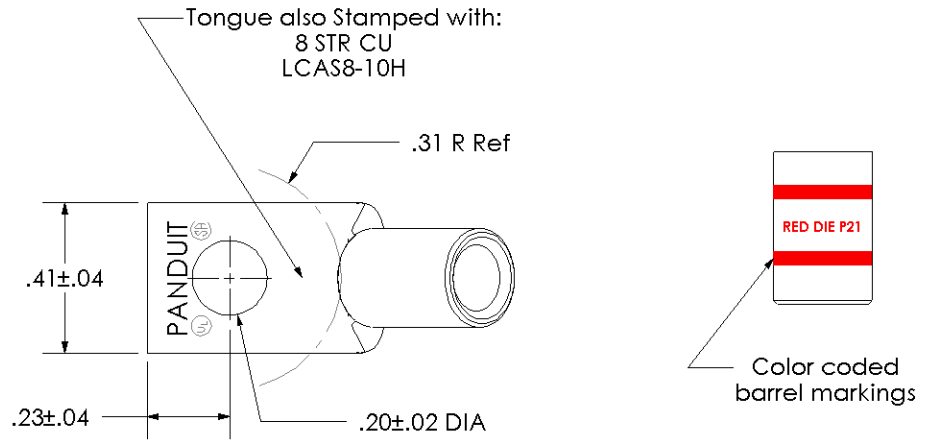

| 01  | 4-03 | PWS | PWS | REMOVED PANDUIT FROM BARREL MARKINGS | 10790 |
|-----|------|-----|-----|--------------------------------------|-------|
| REV | DATE | BY  | CHK | DESCRIPTION                          | ECN   |

**PANDUIT CORP.** TINLEY PARK, ILLINOIS

LCAS8-10H-L  
Copper Lug - One-Hole, Short Barrel, 45° Angle Tongue

SCALE N/A DRAWING NO / CAD FILE LCAS8-10H-CUST