


LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.GL00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.GL00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.GL00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.GL00LF

Protection: 4 --> Flash Au  
6 --> 0.76µ Au

PC card drilling dimensions(after plating)  
(thickness 1.60±0.20mm)

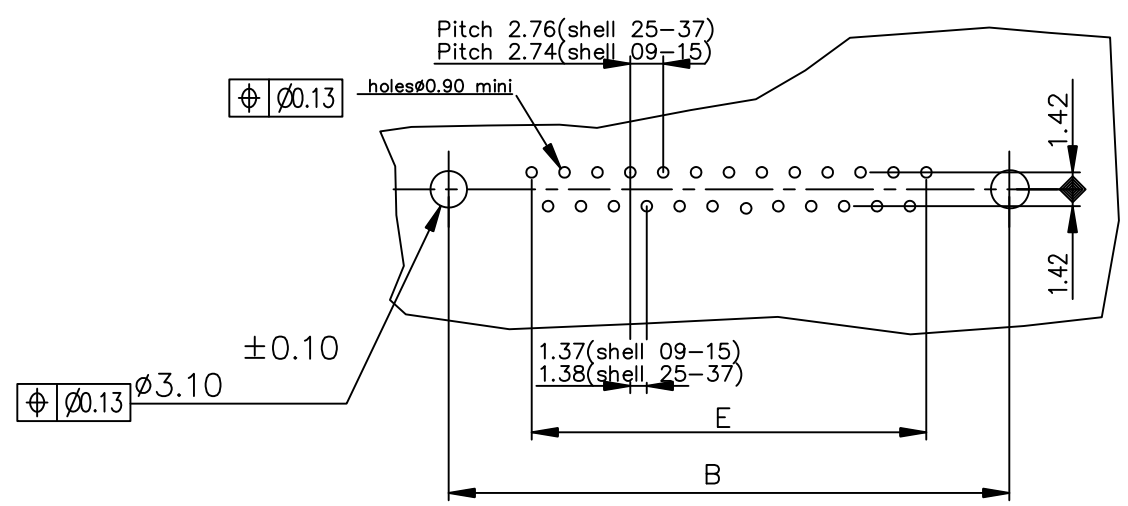

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0000

mat'l. code		surface		tolerance		projection		product family	
-		ISO 1302 ✓		ISO 406 ISO 1101				D-SUB	
ltr	ecn no	dr	date	tolerances unless otherwise specified				title	
J	ELX-I-21654	AB	2015-10-26			MM		MALE DELTA-D STRAIGHT, SOLDER TYPE	
				angles	linear	scale 2:1		dwg no	
				0°±2'	.0±0.1 .00±0.1 .000±0.1			sheet 1 of 1	
				dr	JOUBERT	1994-09-23		size	
				enr	ALIAS BABU	2015-10-26		A3	
				chr	MITHUN PAUL	2015-10-26		C01-8646-0099	
				appd	BIJU K PAUL	2015-10-26		type Product Customer Drawing	
sheet index	revision sheet	J	1						