
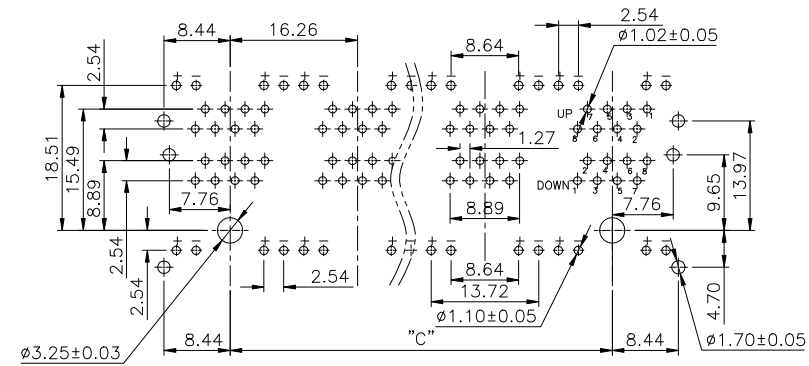


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
▲		P/N ADD	Jako 05/25/04	
▲		P/N ADD	Jako 06/17/04	
▲		P/N ADD	PETERS 10/29/04	
▲		ADD RIB	PETERS 10/25/04	
▲		ADD RIB	PETERS 1/11/05	
▲		DRAWING MODIFY	Jako 02/19/05	

- NOTES:
- ELECTRICAL:
- 1. VOLTAGE RATING : 125 VAC RMS.
 - 2. CURRENT RATING : 1.5 AMP.
 - 3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 - 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
 - 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60HZ, 1MIN.
- MECHANICAL:
- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR FR52 UL94V-0.▲
 - 2. CONTACT MATERIAL : PHOSPHOR BRONZE
 - 3. PLATING : 1: CONTACT AREA— SELECTIVE GOLD PLATING.
2: TAILS— 150u" TIN—LEAD MIN OVER 50u" NICKEL.
GOLD PLATING OVER NICKEL.▲
- 4. OPERATING LIFE : 750 CYCLES MIN.
 - 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.
 - 7. LED SIZE : 3.2*2.0*4.0*P=2.29mm
- ENVIRONMENTAL:
- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION: 0°C TO 70°C.



PC Board Layout example
Component Side Shown

PORTS	N	A±0.25	B±0.25	C±0.05
8	7	113.82	130.95	113.82
6	5	81.30	98.43	81.30
4	3	48.78	65.91	48.78
3	2	32.52	49.45	32.52
2	1	16.26	33.39	16.26

MM (INCH)	DFTO IRONDR	DATE 05/26/02
TOLERANCES EXCEPT AS NOTED	CHKD SAMMY	DATE 2005/2/19
MM	MFO	DATE
.0 ±0.20 ±	APPV LUSHENG	DATE 2005/2/19
.00 ±0.15 ±		
.000 ±0.075 ±		
ANGLES ±	QT'Y :	
THIRD ANGLE PROJECTION	FINISH :	
	SCALE : 3:2	

FULL RISE ELECTRONIC CO., LTD

TITLE RJ45 2*N LED JACK
(STAMPED PIN)

DRAWING NO. GE5J3032
/PART NO. SEE NOTE

DO NOT SCALE DRAWING SHEET 1 OF 1

SIZE A3
REV 6
02/19/05