


**HC-B 6-TFL-40/M1PG13,5G**

Order No.: 1771121

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771121>Sleeve housing, for single locking latch, height 40 mm, with screw  
connection, 1x Pg13.5, straight cable entry**Commercial data**

GTIN (EAN)	 4 017918 035860
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 480 (PC-2009)

**Product notes**WEEE/RoHS-compliant since:  
03/01/2006

[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

**Technical data****General data**

Note	For contact inserts HC-B6, BB10, DD24, M
Design	B6
Height	40 mm
Width	43 mm
Length	60 mm

Housing type	Sleeve housings
Locking type	for single locking latch
Cable exit	Straight
Type of the screw connection	1x Pg13,5
Pg screw connection	With
Wrench size, union nut	20 mm
External cable diameter	7.5 mm ... 12.5 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Cable gland material	Nickel-plated brass
Cable seal material	NBR

#### Certificates / Approvals




Certification

GOST

#### Diagrams/Drawings

Dimensioned drawing

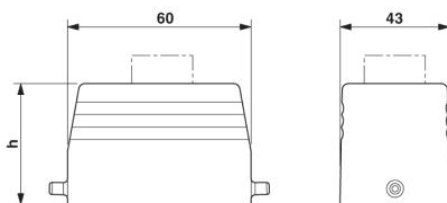

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;