




ODB22071-48HB10A



DC Motorized Impeller 48V
220x71mm (8.7"x2.80")

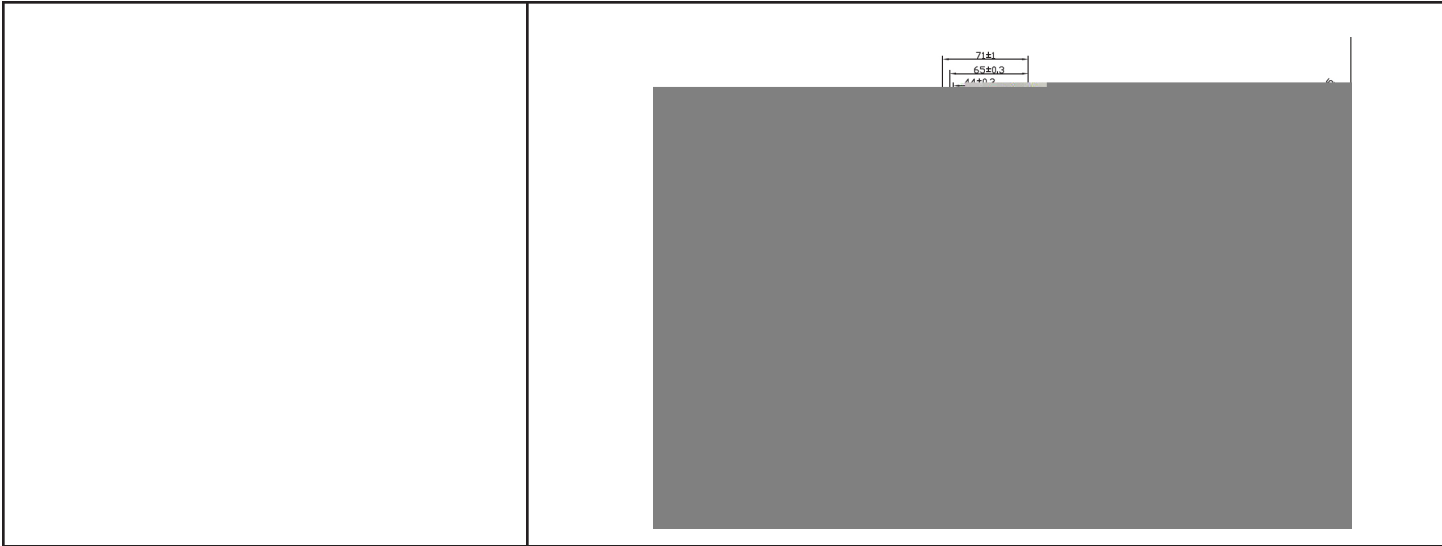

Frame & Impeller	Frame - Aluminum Impeller - UL94V-0 Thermoplastic	Features: Signal Output: Tachometer Speed Control: PWM Weight: ~ 1400g (3.09 lbs) m0
Conneccion	4 Lead wires *	
Motor	DC brushless, IC protected	
Bearing System	Dual ball bearing	
Insulation Resistance	Min. 10M at 500VDC	
Dielectric Strength	1 minute at 500 VAC, max leakage < 500 MicroAmp	
Temperature Range	-10C ~ +65C	
Storage Temperature	-40C ~ +80C	
Life (L10)	-40,000 hours (40C)	

Part Number	ODB22071-48HB10A
Nominal Voltage	48VDC
Voltage Range	36 ~ 5 VDC
Nominal Current	2.7 A
Rated Power	129.6 W
Rated Speed (RPM)	3
Airflow (CFM)	6
Noise Level (dB)	6
Max. Static Pressure	2. " H ₂ O

(External label for fan design is decided by customer)