


FLORENCE-O

~85° + 35° oval beam


TECHNICAL SPECIFICATIONS:

Dimensions	61.0 x 286.0 mm
Height	8.5 mm
Fastening	screw
Colour	clear
Box size	398 x 298 x 140 mm
Box weight	7.5 kg
Quantity in Box	72 pcs
ROHS compliant	yes ⓘ

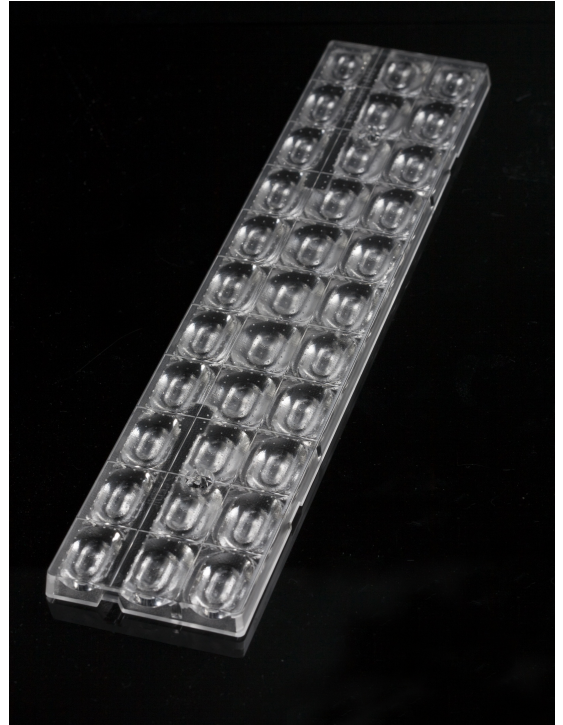

MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
FLORENCE-O	Lens array	PMMA	clear

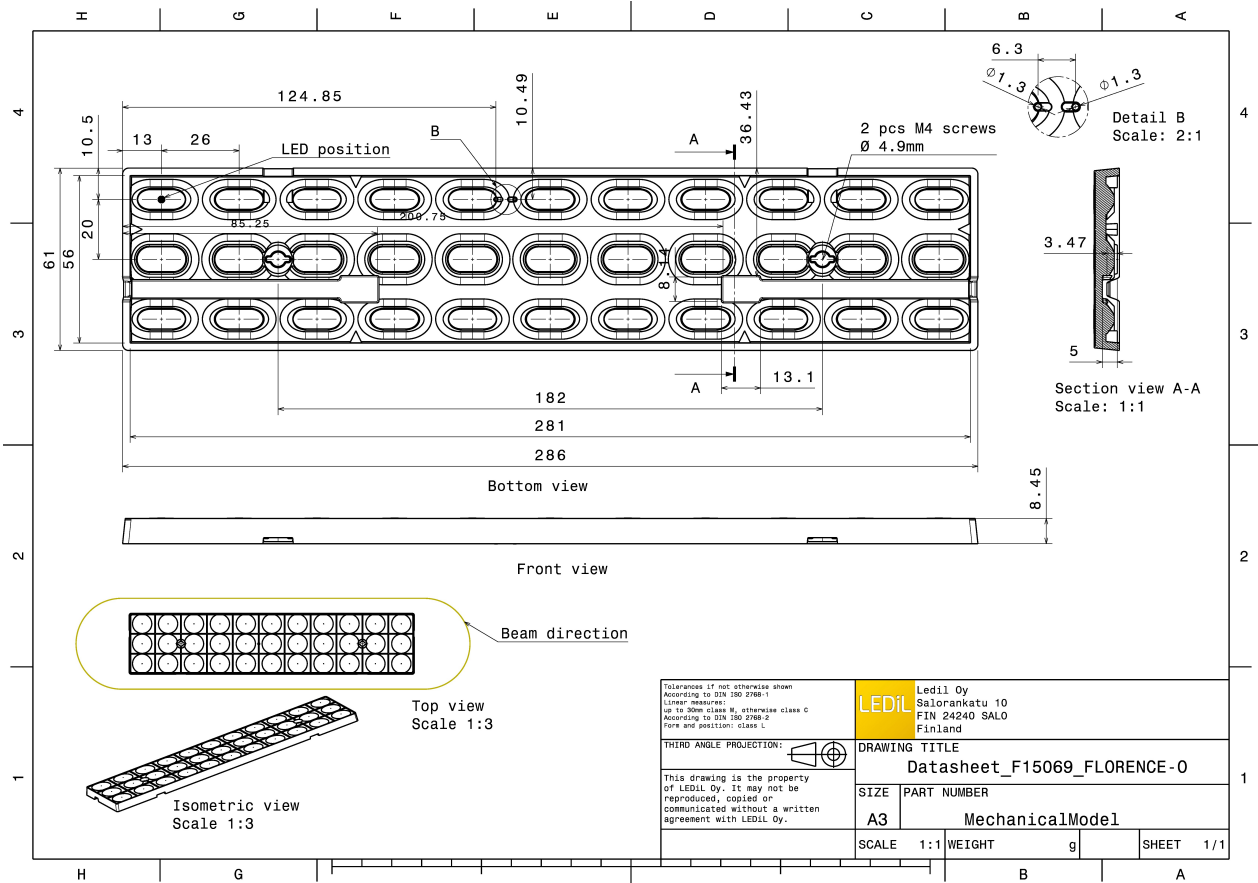



PHOTOMETRIC DATA (MEASURED):





LED TRIDINO R3 8x0 1100 1ft HV
 FWHM 94.0 + 45.0°
 Efficiency 88 %
 Peak intensity 0.660 cd/lm
 Required components:

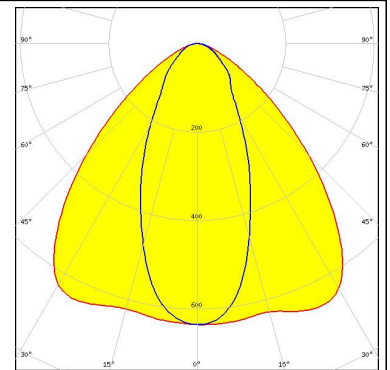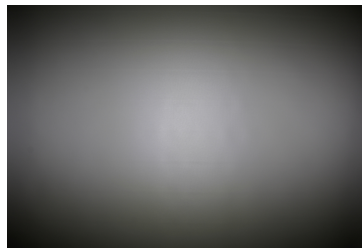



LED LG 6030
 FWHM 89.0 + 46.0°
 Efficiency 82 %
 Peak intensity 0.670 cd/lm
 Required components:

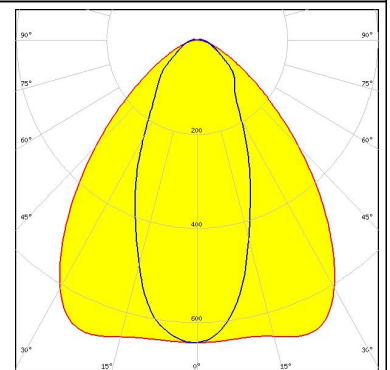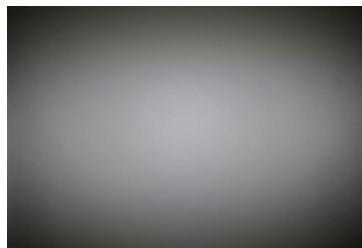

LED LG 7030
 FWHM 88.0 + 47.0°
 Efficiency 94 %
 Peak intensity 0.700 cd/lm
 Required components:

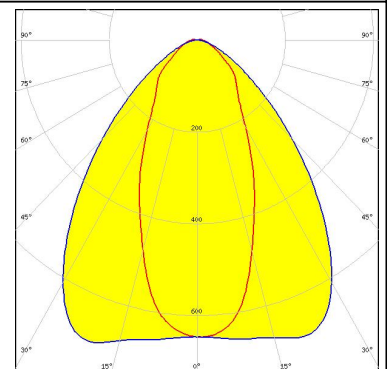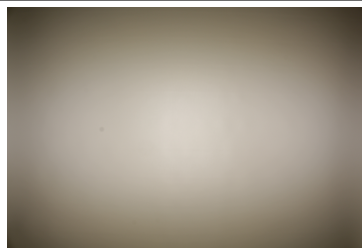


LED LUXEON XR-3535L (L202 - xxxx033C3000)
 FWHM 93.0 + 45.0°
 Efficiency 94 %
 Peak intensity 0.700 cd/lm
 Required components:

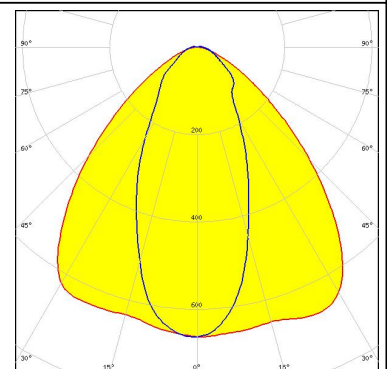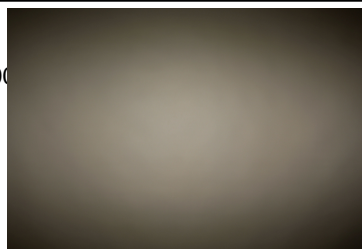

PHOTOMETRIC DATA (MEASURED):


OSRAM
Opto Semiconductors

LED Duris E5
FWHM 91.0 + 46.0°
Efficiency 92 %
Peak intensity 0.650 cd/lm
Required components:

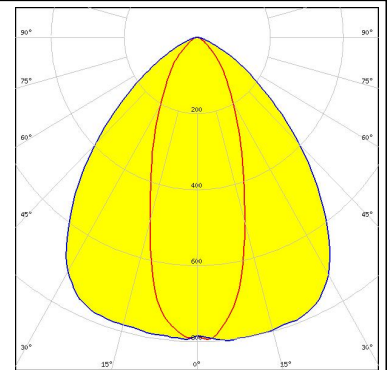



PHILIPS

LED Fortimo LED Line 1ft 1100lm xx0 3R xV2/x
FWHM 88.0 + 45.0°
Efficiency 93 %
Peak intensity 0.640 cd/lm
Required components:

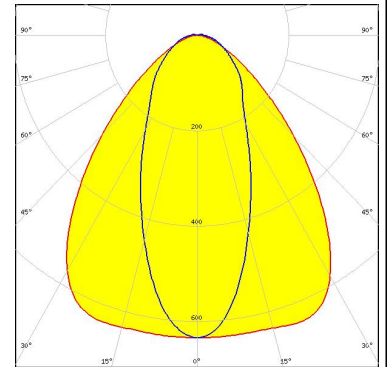


PHILIPS

LED Fortimo LED Line 1ft 650lm 8x0 3R xV2/x
FWHM 92.0 + 46.0°
Efficiency 93 %
Peak intensity 0.650 cd/lm
Required components:

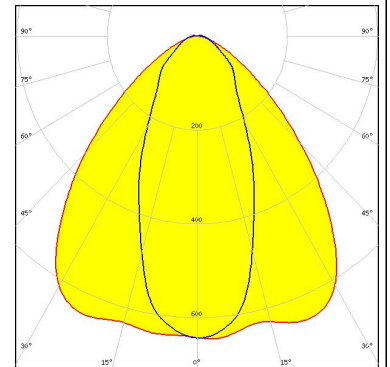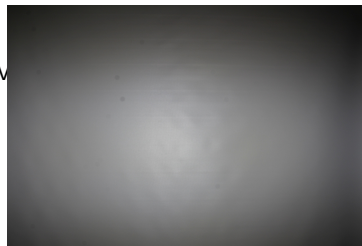



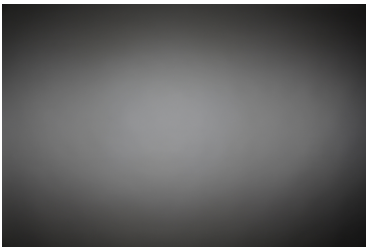
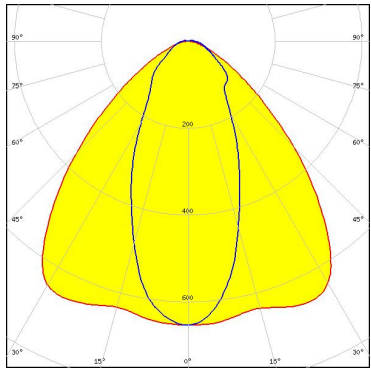
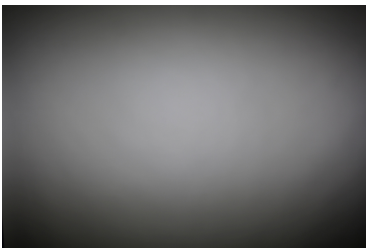
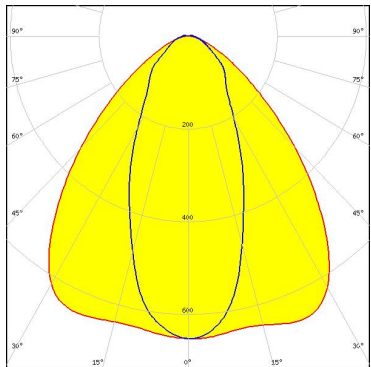


SAMSUNG

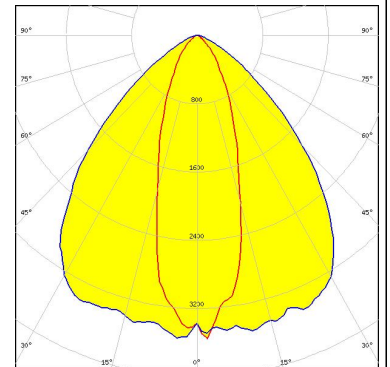LED LM28xB Series
FWHM 92.0 + 46.0°
Efficiency 87 %
Peak intensity 0.630 cd/lm
Required components:




PHOTOMETRIC DATA (MEASURED):
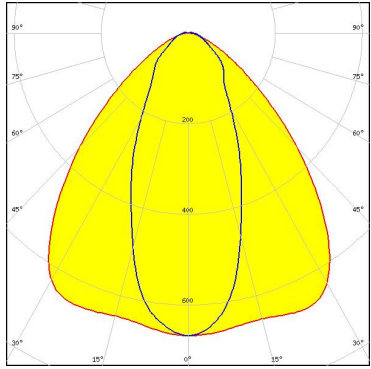
<p> SEOUL SEMICONDUCTOR</p> <p>LED SEOUL 5630C FWHM 92.0 + 44.0° Efficiency 92 % Peak intensity 0.670 cd/lm Required components:</p>		
<p> SEOUL SEMICONDUCTOR</p> <p>LED SunLike 3030 FWHM 93.0 + 44.0° Efficiency 94 % Peak intensity 0.660 cd/lm Required components:</p>		
<p>TRIDONIC</p> <p>LED LLE G2 55mm 2000lm FWHM 91.0 + 46.0° Efficiency 94 % Peak intensity 0.660 cd/lm Required components:</p>		

PHOTOMETRIC DATA (SIMULATED):



LG Innotek

LED LG 5630
FWHM 90.0 + 37.0°
Efficiency 89 %
Peak intensity 0.760 cd/lm
Required components:

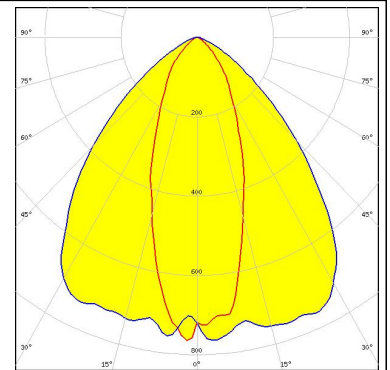


LG Innotek

LED LG 6030
FWHM 84.0 + 35.0°
Efficiency 89 %
Peak intensity 0.820 cd/lm
Required components:

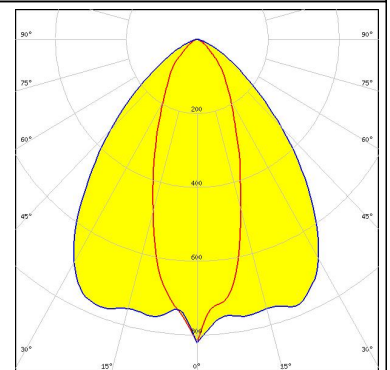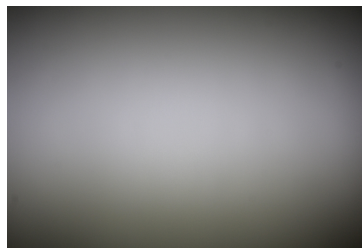


LUMILEDS

LED LUXEON 5050
FWHM 88.0 + 51.0°
Efficiency 90 %
Peak intensity 0.610 cd/lm
Required components:

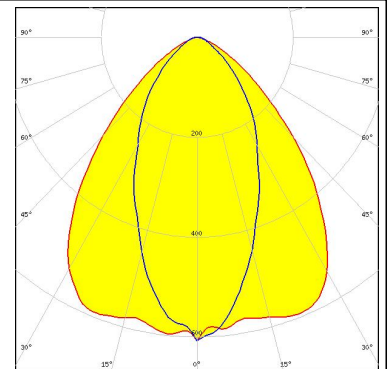

NICHIA


LED NVSxE21A
FWHM 93.0 + 28.0°
Efficiency 92 %
Peak intensity 0.940 cd/lm
Required components:

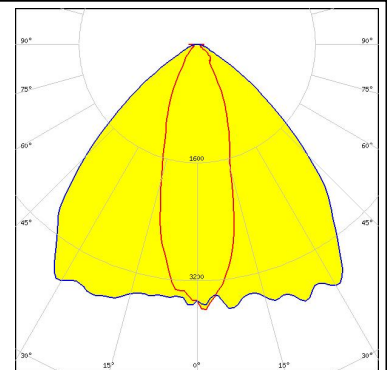

PHOTOMETRIC DATA (SIMULATED):


OSRAM
Opto Semiconductors

LED Duris S8
FWHM 88.0 + 50.0°
Efficiency 90 %
Peak intensity 0.620 cd/lm
Required components:

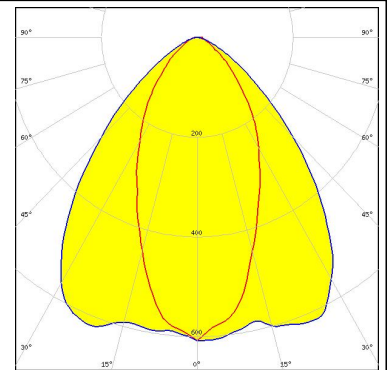


SAMSUNG

LED LM302B
FWHM 90.0 + 33.0°
Efficiency 92 %
Peak intensity 0.920 cd/lm
Required components:

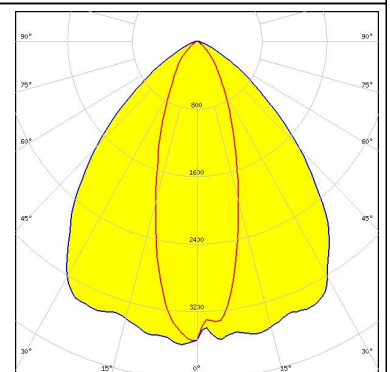


SAMSUNG

LED LM561B Plus
FWHM 90.0 + 37.0°
Efficiency 91 %
Peak intensity 0.770 cd/lm
Required components:

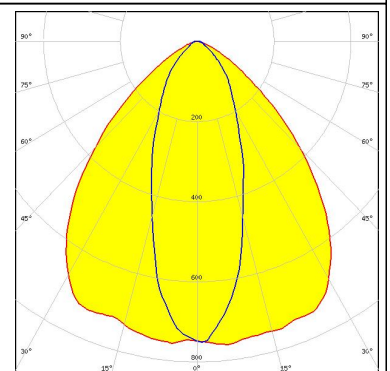


SAMSUNG

LED LM561C
FWHM 90.0 + 35.0°
Efficiency 94 %
Peak intensity 0.890 cd/lm
Required components:

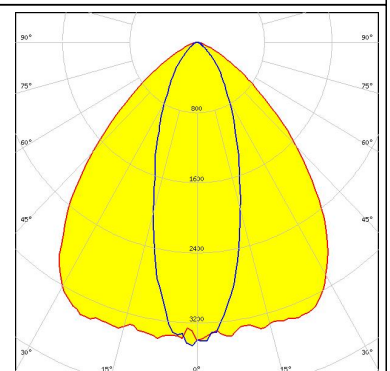

PHOTOMETRIC DATA (SIMULATED):

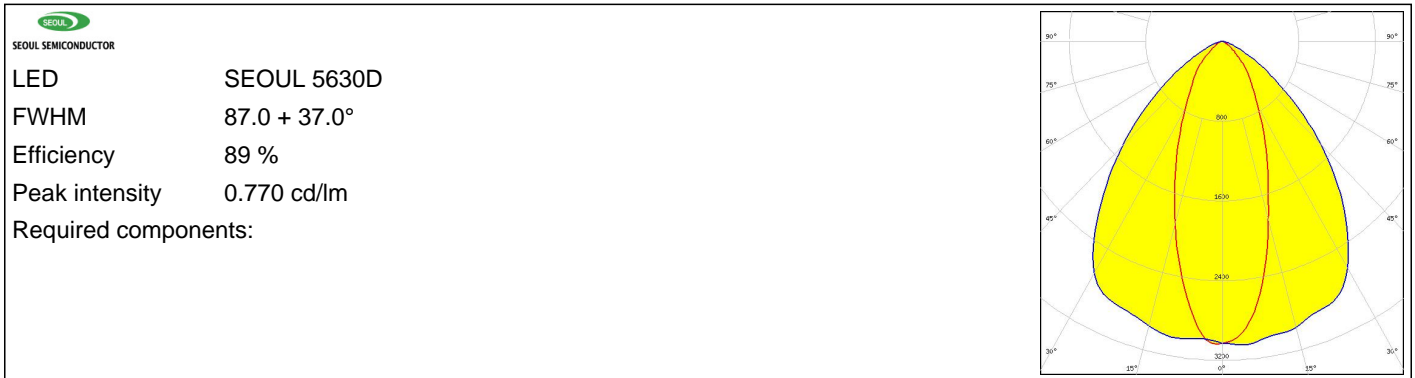

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)