



used for: D-SUB

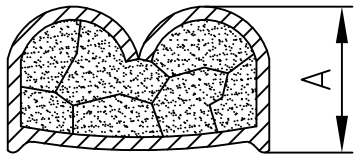


(b)

Wire size AWG	Crimp height A
24	0,68 - 0,86
22	0,68 - 0,86
20	0,68 - 0,86

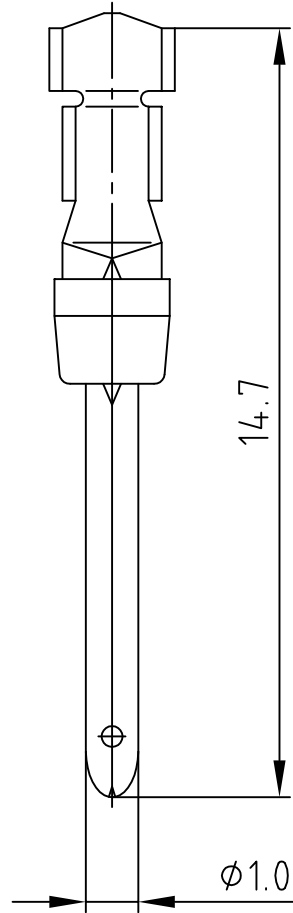

STRIPPING DIMENSIONS (b)

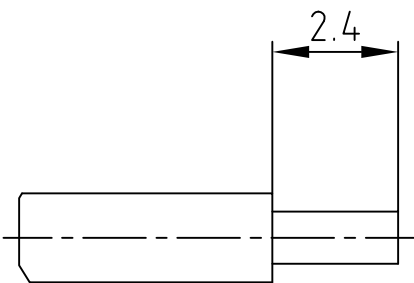

(b) NOTES:

- Material Stamped Contacts: Phosphor Bronze
- Finish: Gold Flash over Nickel in the Contact Area
- Temperature Range: -55°C to +125°C
- Rated Current: 7.5A
- Test Voltage: 1000V eff. at 50Hz
- Contact Resistance: <= 10mOhm
- Insulation Resistance: >= 5000M0hm
- Crimping: Use Crimp Tool 360X10079X

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

				tolerance			
				2002	date	name	
				drawn	11.01.	Parei	
				appd.	11.01.	Resonnek	
				norm			
				d-old			
3 x b	Ä 4116	27.09.2011	Lehmen.				
a	Original						
rev.	description	date	name				

scale:	5:1	
material:	SEE NOTES	
title:	PLUG CONTACT CRIMP AWG 24-20	
dwg no:	AutoCAD 2006	DIN-A
	16K2A430A	4
		sh: 1/1
part no:	161A13399X	

4

3

2

1