



REV. 2  
DCO 142664


.020 <sup>+.003</sup> / <sub>-.001</sub> DIA.  
14 PINS

COIL: @ 25°C	
RESISTANCE	720 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	8.1 VDC MAX., 1.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	
OPERATE	4 MS MAX.
RELEASE	6 MS MAX.
CONTACT STABILIZATION	2.5 MS MAX.

CUSTOMER DATA SHEET

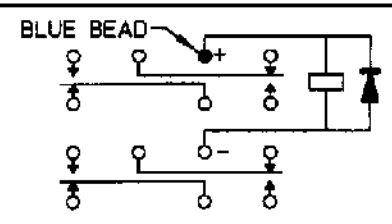

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	100,000 OPERATIONS

DR. PBB 5-3-00 CK. *[Signature]*



CUST.	OPL
CUST. NO.	M39016/53-012M REV.

\*3SBH\* RELAY

3SBH1231A2