



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 BY AMP INCORPORATED, ALL RIGHTS RESERVED. © COPYRIGHT 19

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	39	0	RELEASED	05-DEC-97	EB SS

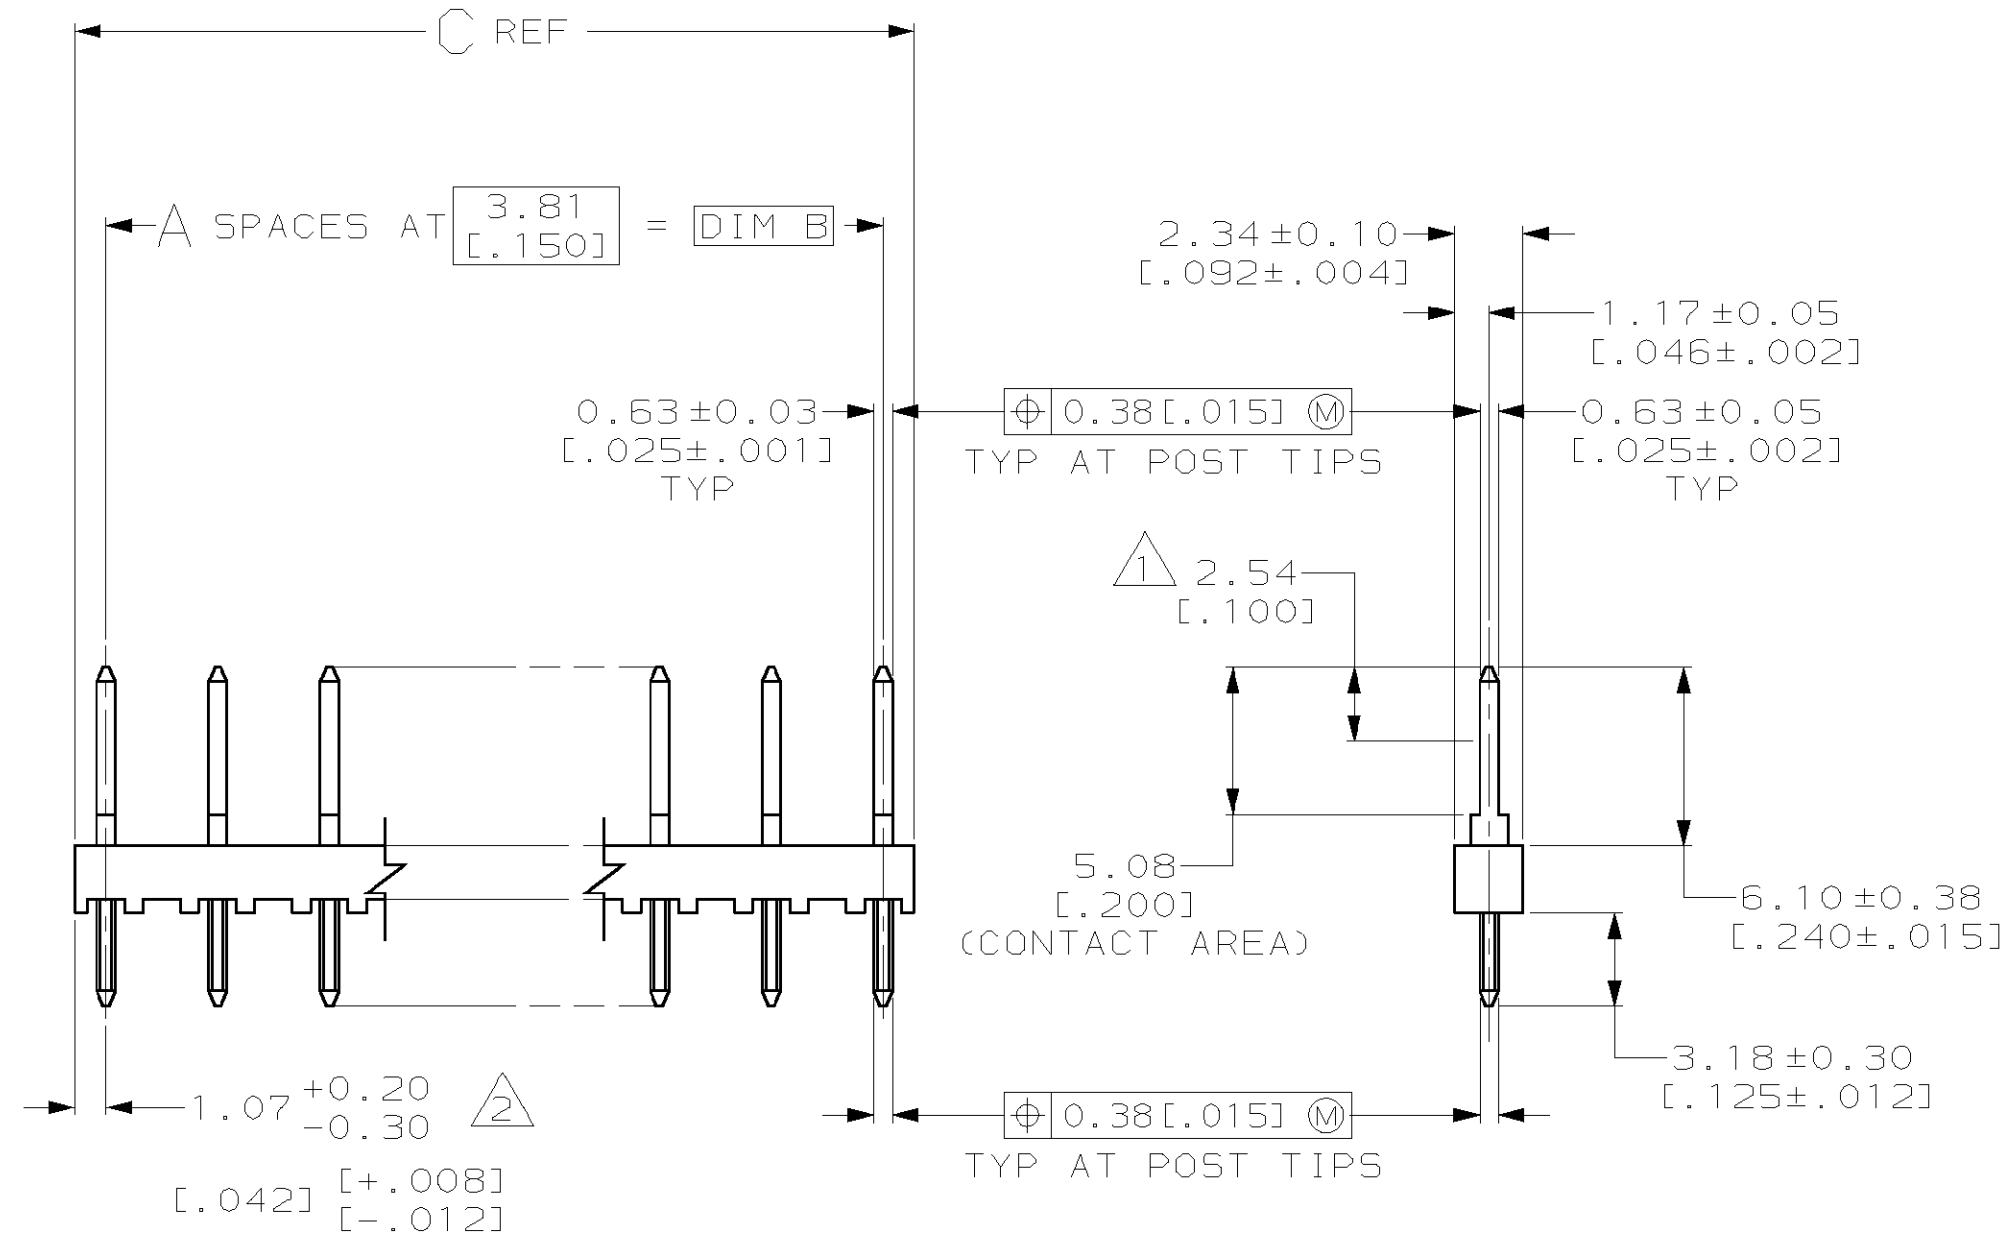

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 2 THE NOTED DIMENSION APPLIES FROM THE BASIC DIMENSION LINE (NOT THE POST CENTERLINE) TO THE SURFACE INDICATED.
- 3. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 4 MATERIAL: HOUSING - FLAME RETARDANT THERMOPLASTIC, COLOR - BLACK. POSTS - PHOS BRONZE.
- 5 FINISH: 0.00076[0.000030] GOLD ON THE CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER 0.00127[0.000050] NICKEL.

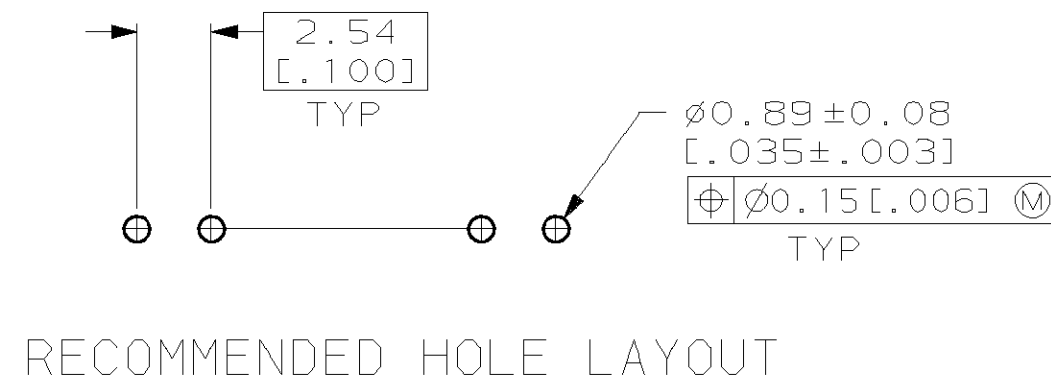

13.56 [0.534]	11.43 [0.450]	3	4	147058-1
C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. BRANDBERG 05-DEC-97	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCH]		CHK S. SHUEY 05-DEC-97	NAME ASSEMBLY, MOD II, SINGLE ROW, 3.81 [0.150]Ø, VERTICAL	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±0.13 [0.005] 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH 5		APVD S. SHUEY 05-DEC-97	PRODUCT SPEC - APPLICATION SPEC - RESTRICTED TO -	
MATERIAL 4	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C- 147058
CUSTOMER DRAWING		SCALE -	SHEET 1 OF 1	REV 0

147058

A