


Extended length is with 500g of force

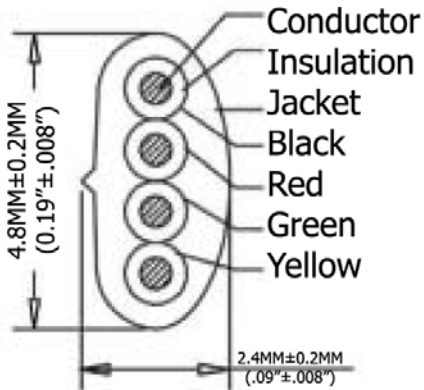

Conductor
Insulation
Jacket
Black
Red
Green
Yellow

TERMINATION:

P1	P2	COLOR
1	1	BLACK
2	2	RED
3	3	GREEN
4	4	YELLOW

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	75.0 Inches
7,620.0MM-8,763.0MM	1,905.0MM

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm [0.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

SEC:A-A

Scale	1:1	Name			Item No.	
TOLERANCE		Drawn	11.02.11	Chappell	AT-C-26-4/4/W-25/R	
X.X	±0.40				Title	
X.XX	±0.25				NON-UL 26 AWG (0.12X12)*4C, O.D.: 2.4*4.8MM, Reverse Plug, 50µ" of contact plating, WHITE	
X.XXX	±0.15				Drawing No.	
Angle	±3°				rev00	
		Modification			Date	Sheet
		Name			Replace	

