



1 2 3 4 5 6 7

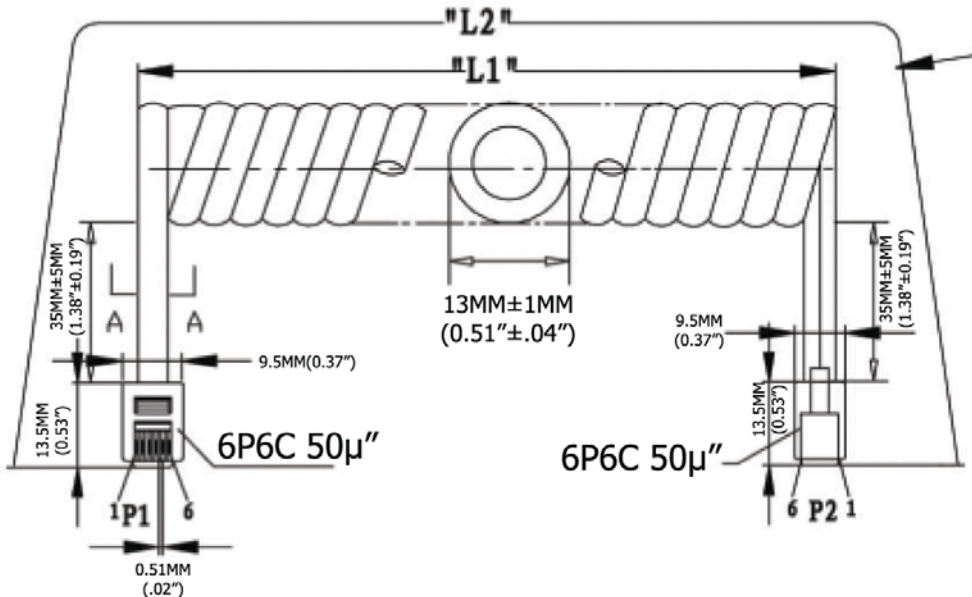

Extended length is with 500g of force

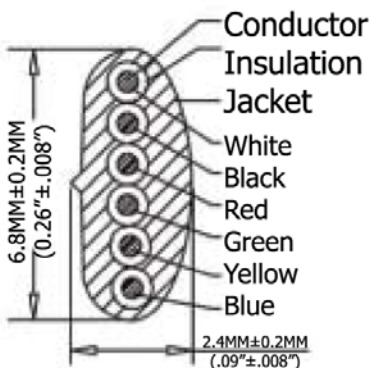

SBC: A-A

P1	P2
1	6
2	5
3	4
4	3
5	2
6	1

Extended Length ("L2")	Typical Retracted Length ("L1")
84 Inches - 96.6 Inches	29.5 Inches
2,133.6MM-2,453.64MM	749.3MM

- Material:**
- Plug Housing: Polycarbonate, clear
 - Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
 - Connector: 50μ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54μm[.000100] thick nickel underplate
 - Conductor(X6C): 26AWG (0.12X12) Bare Copper
 - Insulation(X6C): PP6331 ID 0.95-1.0
 - Jacke: PVC No UL 80 P
 - Package: Individual PE Bag



Scale	1:1			Name	
TOLERANCE		Drawn		11.02.11	Chappell
X.X	±0.40	Approved			
X.XX	±0.25				
X.XXX	±0.15				
Angle	±3°				
		Modification		Date	Name



Item No.		AT-C-26-6/6/S-7
Title		
NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Standard Plug, 50μ" of contact plating, SILVER		
Drawing No.		rev00
Replace	Sheet	

1 2 3 4 5 6 7