


CXP-RS

~11° spot beam optimized for CREE XP-E.
Assembly with black holder.


TECHNICAL SPECIFICATIONS:

Dimensions	21.6 + 21.6 mm
Height	13.2 mm
Fastening	tape
Colour	black
Box size	
Box weight	11.9 kg
Quantity in Box	2448 pcs
ROHS compliant	yes ⓘ

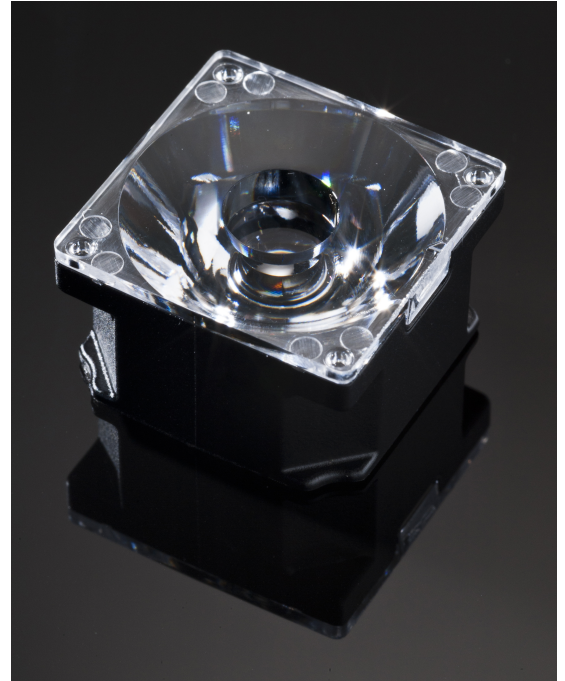

MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
ROSE-B-B-RS	Lens	PC	clear
ROSE-HLD-CXP-BLK	Holder	PC	black
ROSE-TAPE	Tape	PU tape	

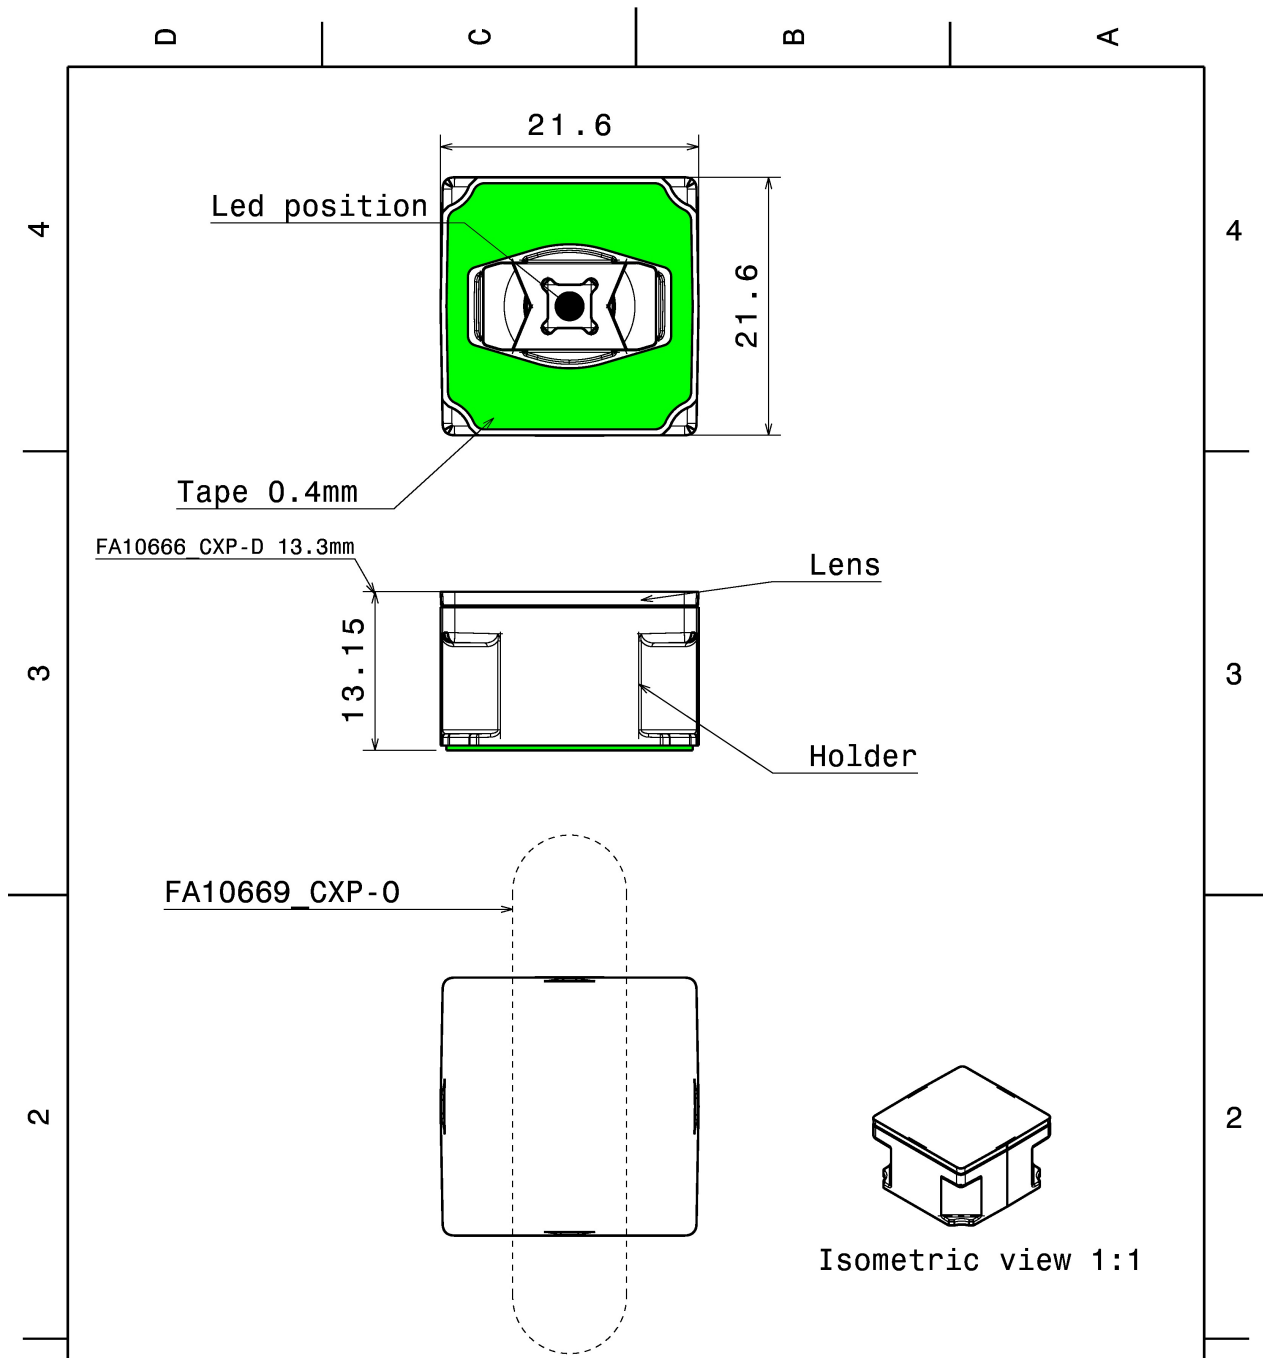

<p>Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L</p> <p>THIRD ANGLE PROJECTION: </p> <p>This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."</p>	LEDiL		Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
	DRAWING TITLE			
	Datasheet CXP			
	SIZE	PART NUMBER		
A4	-			
SCALE	2:1	WEIGHT	-	SHEET 1/1

PHOTOMETRIC DATA (MEASURED):

CREE



LED XP-E
FWHM 7.0°
Efficiency 86 %
Peak intensity 24.770 cd/lm
Required components:

CREE

LED XP-G
FWHM 11.0°
Efficiency 85 %
Peak intensity 15.870 cd/lm
Required components:

CREE

LED XP-L
FWHM 16.0°
Efficiency 80 %
Peak intensity 8.700 cd/lm
Required components:

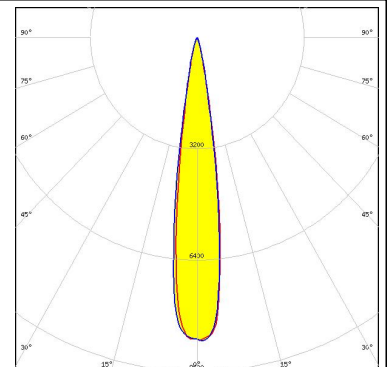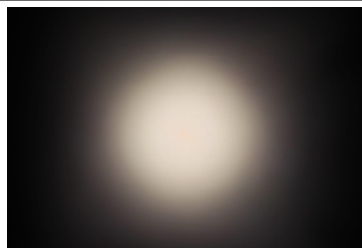


SEOUL SEMICONDUCTOR

LED Z5
FWHM 7.0°
Efficiency 83 %
Peak intensity cd/lm
Required components:

PHOTOMETRIC DATA (SIMULATED):


CREE 

LED XHP35 HD
FWHM 16.0°
Efficiency 84 %
Peak intensity 7.080 cd/lm
Required components:

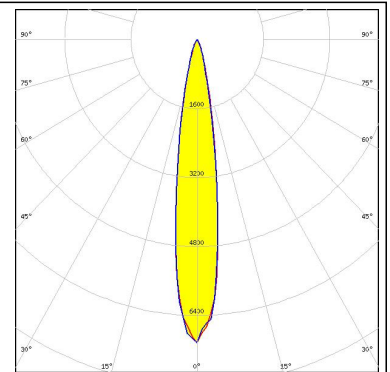

CREE 

LED XP-G2
FWHM 11.0°
Efficiency 87 %
Peak intensity 20.300 cd/lm
Required components:

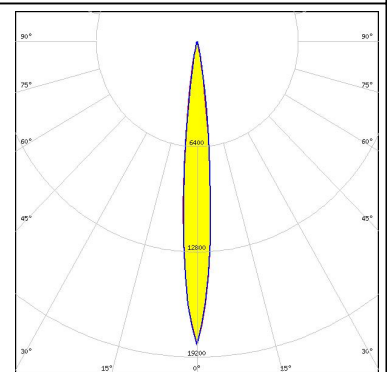

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)