


LOC	DIST	REVISIONS			DATE	DWN	APVD
—	—	P	LTR	DESCRIPTION	18JUL2014	TJ	JK
		D		Contact pin base material change from CuSn (Phosphor bronze) to CuZn (Brass). Plating change from MIN. 0.8µm gold plating to min. 0.7µm Pd Ni + 0.1µm gold flash at contact area (Area F).			

POLZ PRO REIHE	L±0.4	BESTELL-NR.
—	—	—
2	5.08	-2
3	7.62	-3
4	10.16	-4
5	12.70	-5
6	15.24	-6
7	17.78	828 296 -7
8	20.32	-8
9	22.86	-9
10	25.40	1- -0
11	27.94	1- -1
12	30.48	1- -2
13	33.02	1- -3
14	35.56	1- -4
15	38.10	1- -5
16	40.64	1- -6
17	43.18	1- -7
18	45.72	1- -8
19	48.26	1- -9
20	50.80	2- -0
21	53.34	2- -1
22	55.88	2- -2
23	58.42	2- -3
24	60.96	2- -4
25	63.50	2- -5
26	66.04	2- -6
27	68.58	2- -7
28	71.12	2- -8
29	73.66	2- -9
30	76.20	3- -0
31	78.74	3- -1
32	81.28	3- -2
33	83.82	3- -3
34	86.36	3- -4
35	88.90	3- -5
36	91.44	3- -6
37	93.98	3- -7
38	96.52	3- -8
39	99.06	3- -9
40	101.60	4- -0
41	104.14	4- -1
42	106.68	4- -2
43	109.22	4- -3
44	111.76	4- -4
45	114.30	4- -5
46	116.84	4- -6
47	119.38	4- -7
48	121.92	4- -8
49	124.46	4- -9
50	127.00	5- -0

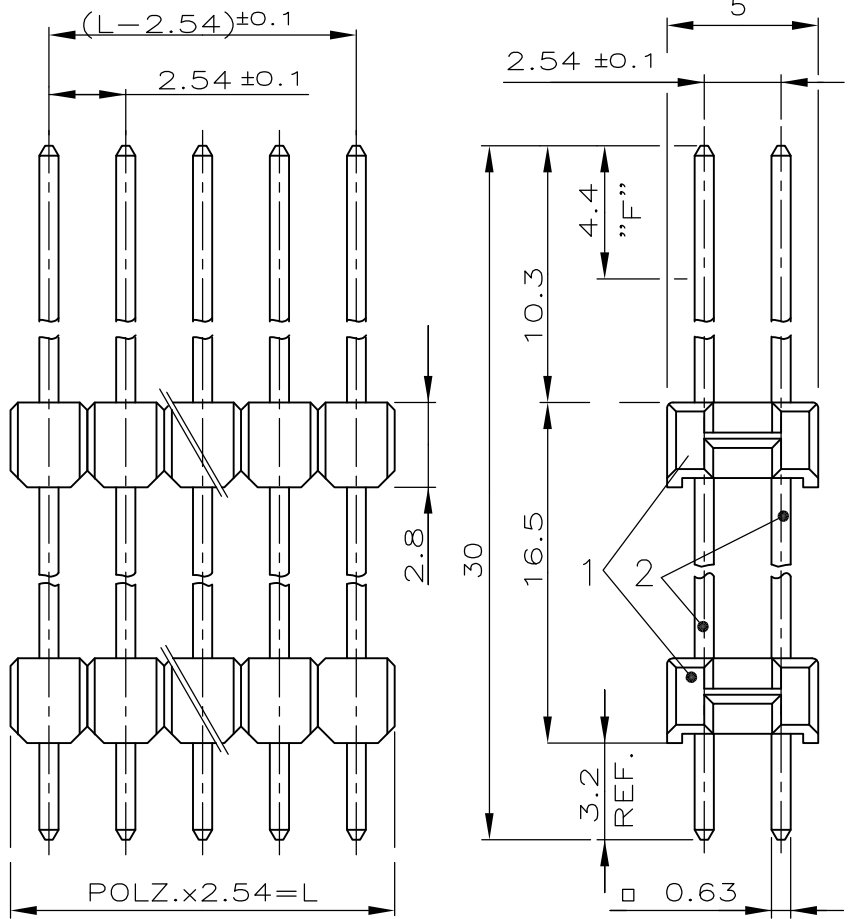

STECKSEITE: IM BEREICH "F" 0.7µm PdNi+0.1µm GOLD FLASH ÜBER 1.27µm NICKEL
 LÖTSEITE: MIN. 2.5µm ZINN ÜBER 1.27µm NICKEL

- 1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

1	CONTACT PIN	CuZn	2
COLOUR:GREEN	PIN HOUSING	PBT	1
FINISH/COLOR	PART DESCRIPTION	MATERIAL	ITEM NO.

OBSOLETE 2

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

By -

COPYRIGHT

THIS DRAWING IS UNPUBLISHED.

DIMENSIONS: mm	DWN	G.Holous	17.07.89	MATERIAL	SEE TABLE	FINISH	SEE TABLE
	CHK	M.Schaarschmidt	—				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	—	—				
±0.2	PRODUCT SPEC	108-18012		NAME	SPEZ. AMPMODU II STIFTLISTE ZWEIREIHIG		
0 PLC ± -	APPLICATION SPEC	—		SIZE	A4	CAGE CODE	00779
1 PLC ± -	WEIGHT	—		DRAWING NO	C-828296		RESTRICTED TO
2 PLC ± -				SCALE 4:1			SHEET 1 OF 1
3 PLC ± -				CUSTOMER DRAWING			REV D
4 PLC ± -							
ANGLES ± -							