
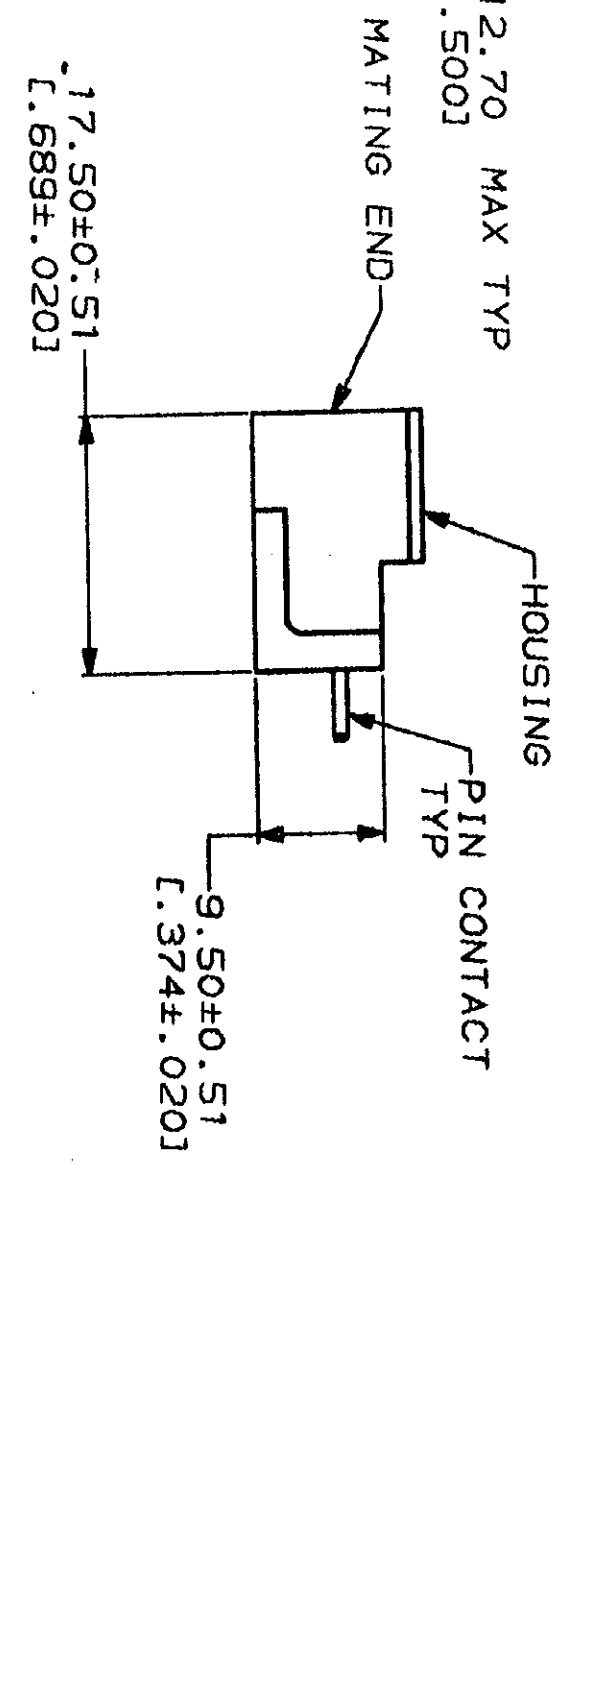


RECOMMENDED PC BOARD LAYOUT

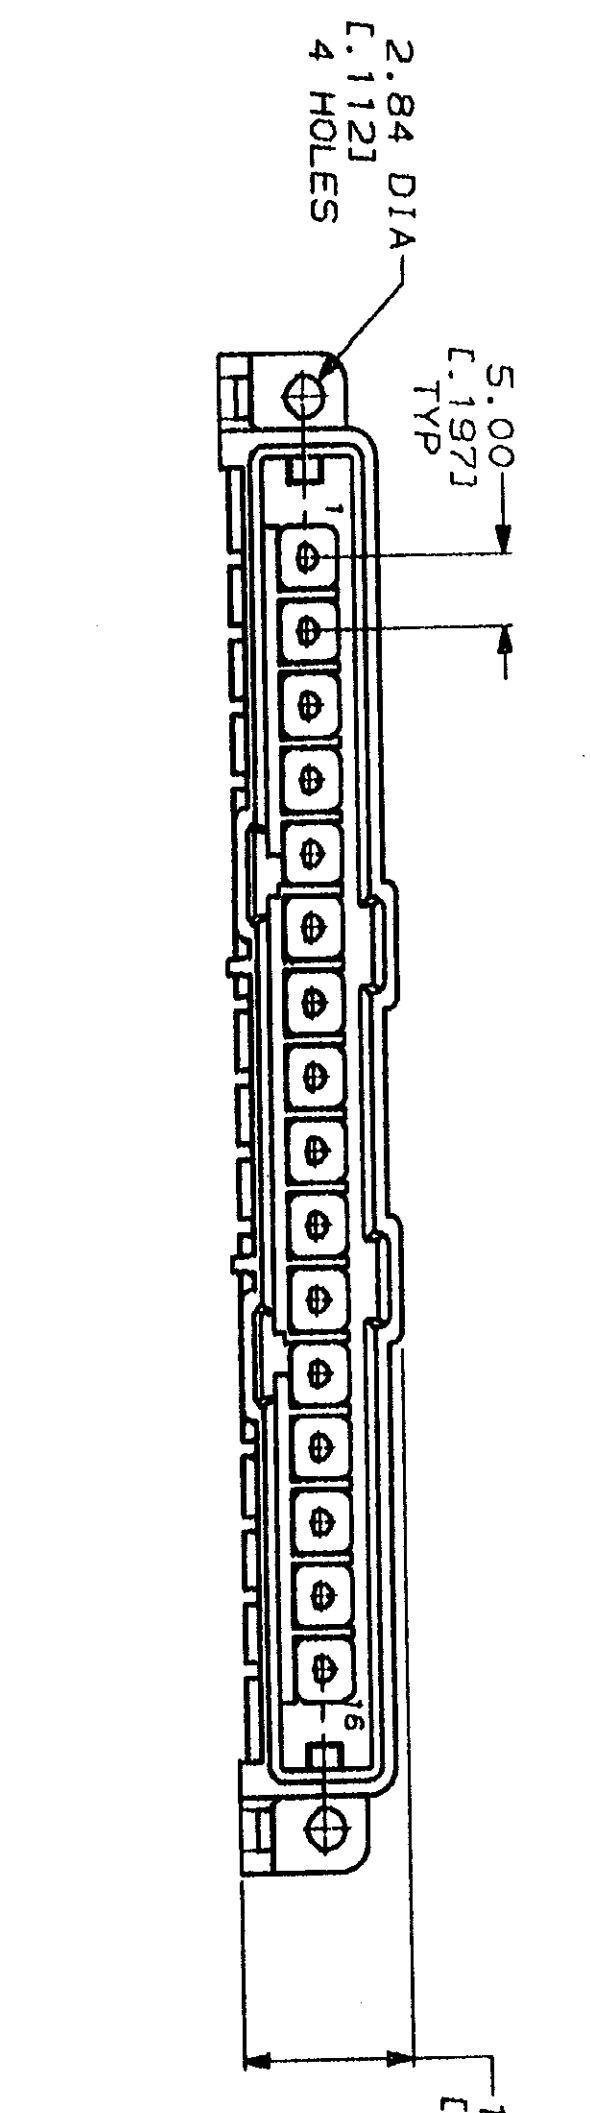

- 1 NYLON, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81µm [L.000150] MIN TIN-LEAD OVER 2.54µm [L.000100] MIN COPPER OR 1.27µm [L.000050] MIN NICKEL.
- 4 0.76µm [L.000030] MIN GOLD FOR A LENGTH OF 5.08 [L.200] MIN FROM MATING END, 3.81µm [L.000150] MIN TIN-LEAD FOR A LENGTH OF 5.36 [L.211] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [L.000050] MIN NICKEL.

DO NOT SCALE PRINT.		DR 07/21/92		NAME	
UNITS SPECIFIED (INCHES)		L. SIPE		AMP	
DIMENSIONS IN mm (INCHES)		CHK 7-24-92		AMP Incorporated	
TOLERANCES ON:		R. STONE		Harrisburg, PA 17105-9606	
1 FRACTIONAL ± .005 [L.010]		APPD 7-24-92		A. TRAVIS	
2 DECIMAL ± 0.25 [L.010]		APPD 7-24-92		C. RONDE	
3 PLG DEC ± .		PRODUCT SPEC		MATERIAL	
ANGLES		APPLICATION SPEC		HOUSING: $\Delta$	
CONTACTS: $\Delta$		SCALE 4:1		PIN HEADER ASSEMBLY, 16 POSN, IN-LINE, SMALL METRIC CONNECTOR, METRIMATE	
CONTACTS, SEE TABLE		SIZE C		DRAWING NO C-207599	
FINISH		WEIGHT		SHEET 1 OF 1	

4	207599-3
3	207599-1
FINISH	PART NO

CUSTOMER DRAWING