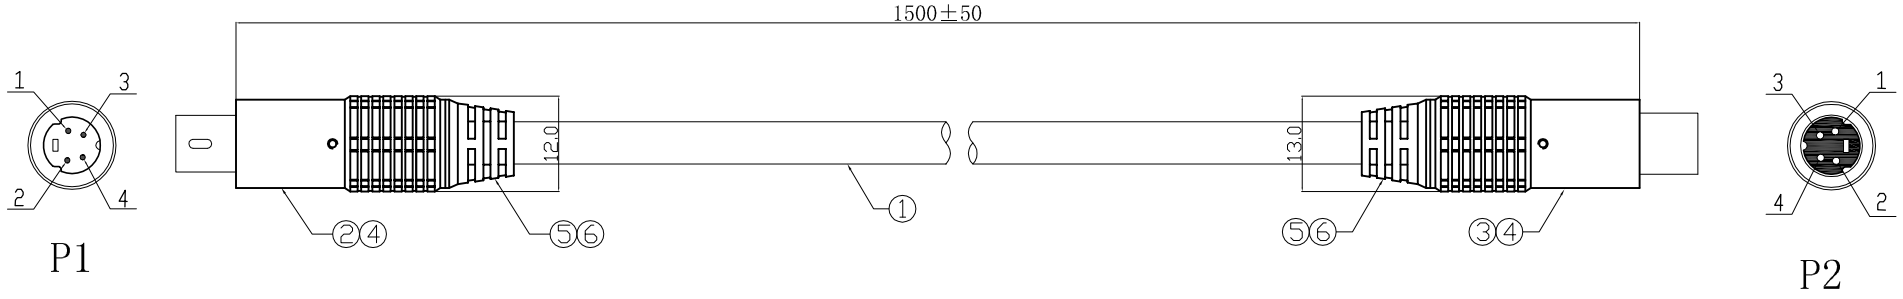


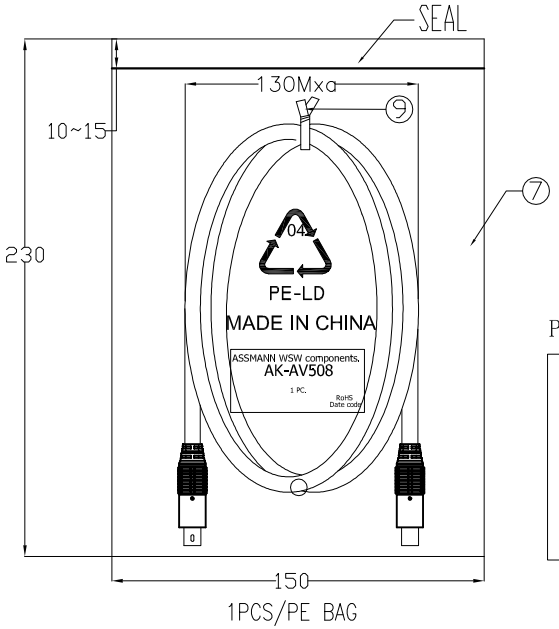


Electrical test:
1.100% short,open,miss wire test
2.Conduct resistance:10 Ohm(max)
3.Insulation resistance:10Mohm(min)
4.Dielectric test:DC 300V

PIN ASSIGNMENT:




| NO. | NAME | Q'TY | SPECIFICATION |
|---|---|---|---|
| ⑨ | TIE | 1 | BLACK L=120mm |
| ⑧ | PE BAG | 1/10 | CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS". |
| ⑦ | PE BAG | 1 | CLEAR SIZE: 150*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC". |
| ⑥ | OUT JACKET | 6.33g | PVC 70P COLOR BLACK |
| ⑤ | IN JACKET | 4.2g | CLARITY LDPE |
| ④ | TUBE | 4 | HEAT SHRINK TUBE BLACK OD3.0*7MM |
| | | 4 | HEAT SHRINK TUBE BLACK OD1.5*8MM |
| ③ | CONN | 1 | MINI DIN 4PIN FEMALE S-VHS G/F PLASTIC BLACK SHELL-OD13.0mm. |
| ② | CONN | 1 | MINI DIN 4PIN MALE S-VHS G/F PLASTIC BLACK SHELL-OD12.0mm. |
| ① | CABLE | 1 | UL2835 (30#*1COAX+S)*2C+AL/MY+D.W(7/0.12TC) OD7.0mm JACKET COLOR BLACK |

RoHS compliant
Unit: mm

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Scale | Free | | | | | Date | Name | Customer-No. |
| TOLERANCE | | | | | Drawn | 20.02.2017 | Amy | |
| | | | | | Approved | 20.02.2017 | Amy | ASSMANN WSW-No. AK-AV508 |
| DIM | TOL | | | | | | | Drawing-No. ASS 7863 CA rev00 |
| | | ⓪ | Drawn | 20.02.2017 | Amy | | | |
| Angle | TOL | Id. | Modification | Date | Name | | | Replace / Sheet |

ASSMANN wsw components