

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING

V3-2900

CK-X2948

CATALOG LISTING
V3-2900
PAGE 1 OF 1

ISSUE
1

REPLACES X102480-V3

RELEASE NO. PR-23071

CHECK

CHECK

22 OCT 97



DCS

CHECK

15 JUL 97

DCS

DDM/CAD
DRAWN

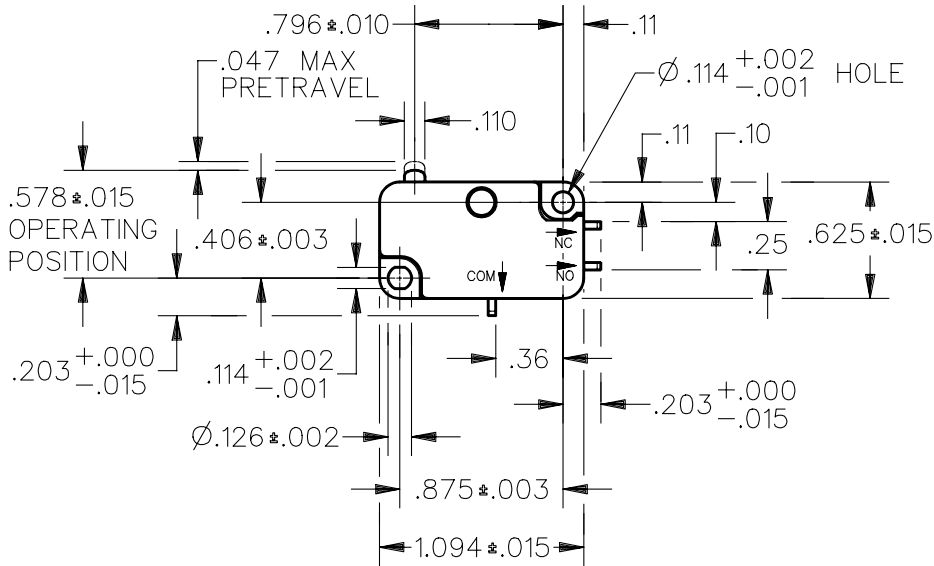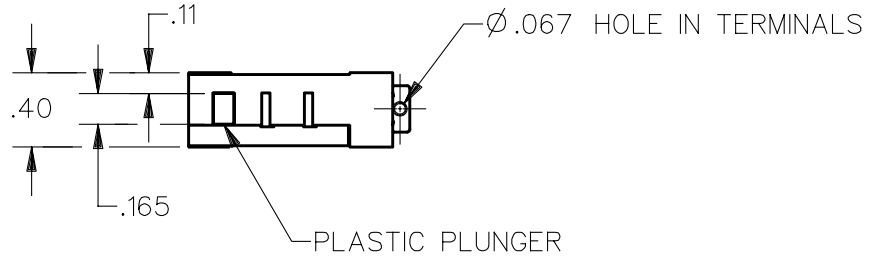


NOTES

- 1 - TERMINALS ARE PLATED FOR SOLDERING
- 2 - MAXIMUM MECHANICAL DEAD BREAK OF .0025 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ---125-225 GRAMS
RELEASE FORCE --- 30 GRAMS MIN
DIFFERENTIAL TRAVEL --- .010 MAX
OVERTRAVEL --- .050 MIN
FREE POSITION --- .625 MAX
RELEASE TRAVEL --- .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

25A, 277 VAC
1HP, 125 VAC
2HP, 250 VAC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .015 LB

