


DO NOT SCALE
DIMENSIONS IN mm

METRIC

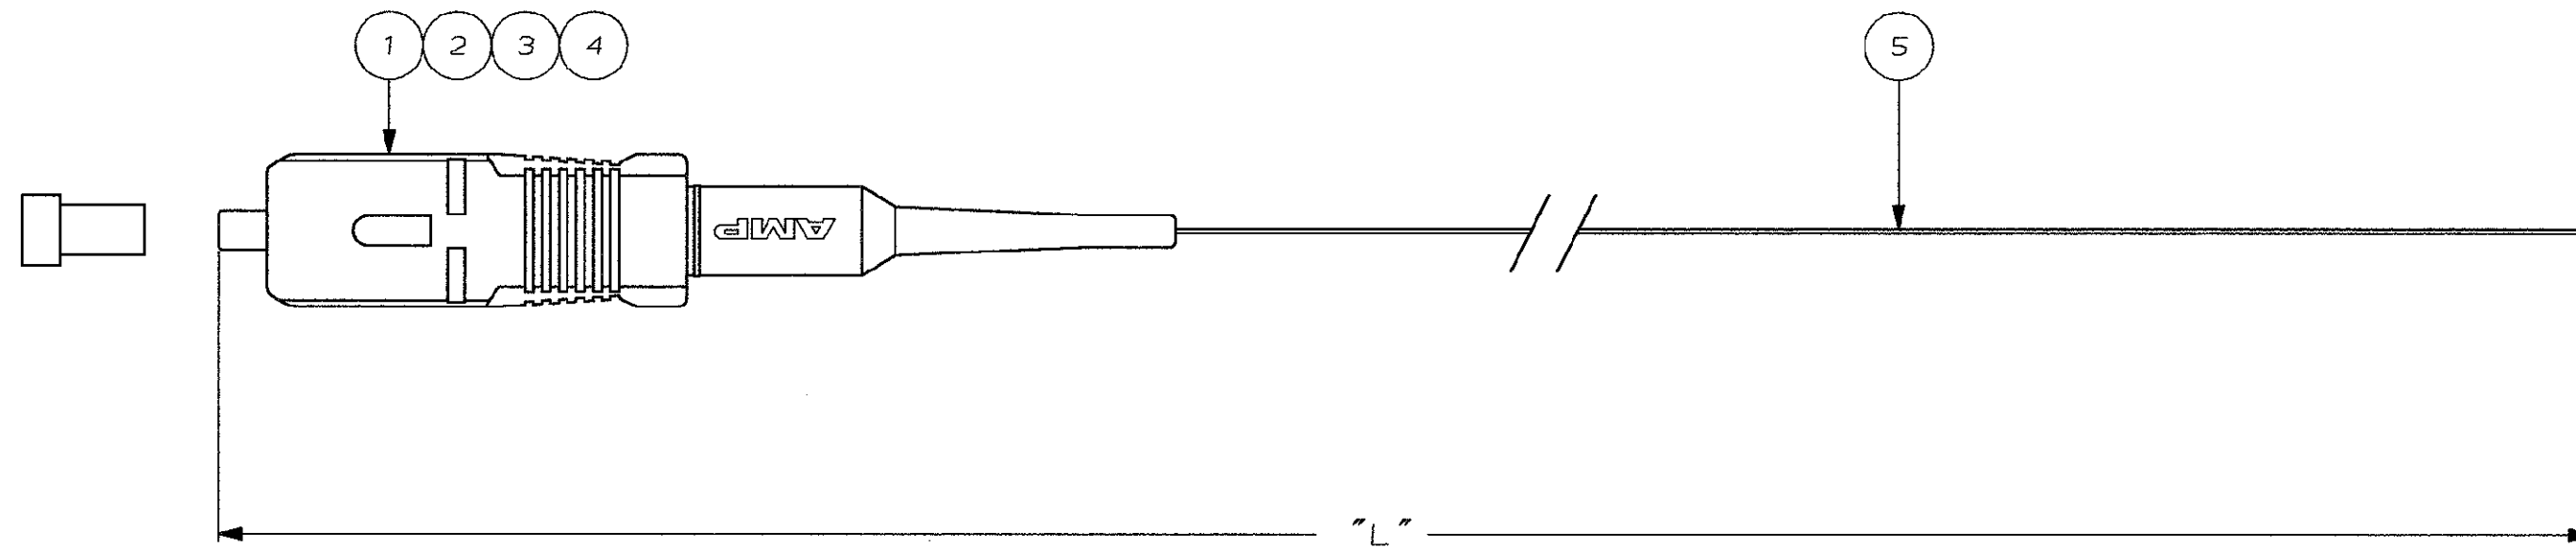

NOTES:

- ATTENUATION $\leq 0,3$ dB, MEASURED AT 1300 nm ACC. IEC 874-1
CLAUSE 4.4.7. METHOD 7 EQUILIBRIUM MODE CONDITION
- ACTUAL ATTENUATION SUPPLIED ON TEST RESULT SHEET PER INDIVIDUALLY PACKED ASSEMBLY
- CABLE INFO:
 - FIBRE CORE: 50 μ m
 - BUFFER MATERIAL: LOW SMOKE ZERO HALOGEN
 - BUFFER COLOUR: GREEN
 - OUTER DIAMETER: 900 μ m

PART NUMBER	"L" (METER)
0-0349568-1	0,5 -0/+0,1
0-0349568-2	1,0 -0/+0,2
0-0349568-3	1,5 -0/+0,2
0-0349568-4	2,0 -0/+0,2
0-0349568-5	2,5 -0/+0,2
0-0349568-6	3,0 -0/+0,2
0-0349568-7	3,5 -0/+0,2
0-0349568-8	4,0 -0/+0,2
0-0349568-9	4,5 -0/+0,2
1-0349568-0	5,0 -0/+0,2

L	QTY	PART NUMBER	DESCRIPTION	ITEM
L	-	-	FO BUFFERED FIBRE DES 50/125/900, GREEN	5
1	-	-	SC BUFFER BOOT, BLACK	4
1	-	-	SC CERAMIC, OVERMOLDED	3
1	-	-	SC HOUSING, BEIGE	2
1	-	-	FERRULE DUST CAP, BLACK	1
SEE TABLE		CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED		
		© COPYRIGHT 19- BY AMP-HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.		
		THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION		
		AMP-HOLLAND B.V. 's-Hertogenbosch, The Netherlands.		
B		EH-0491-98 MN MN 03 APR 98		
LTR.		REVISION RECORD DR. CHK. DATE		
DR.:		M.NIJHUIS		
DATE:		03 APR 98		
CHK.:		M.NIJHUIS		
DATE:		20-05-98		
APP.:		M.NIJHUIS		
DATE:		20-05-98		
DWG. No.		C-349568		
REV. LTR.		B		
SHEET		1 OF 1		
		A2		