



Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case that the application demands a high level of reliability, such as automotive,  
 please contact a company representative for further information.

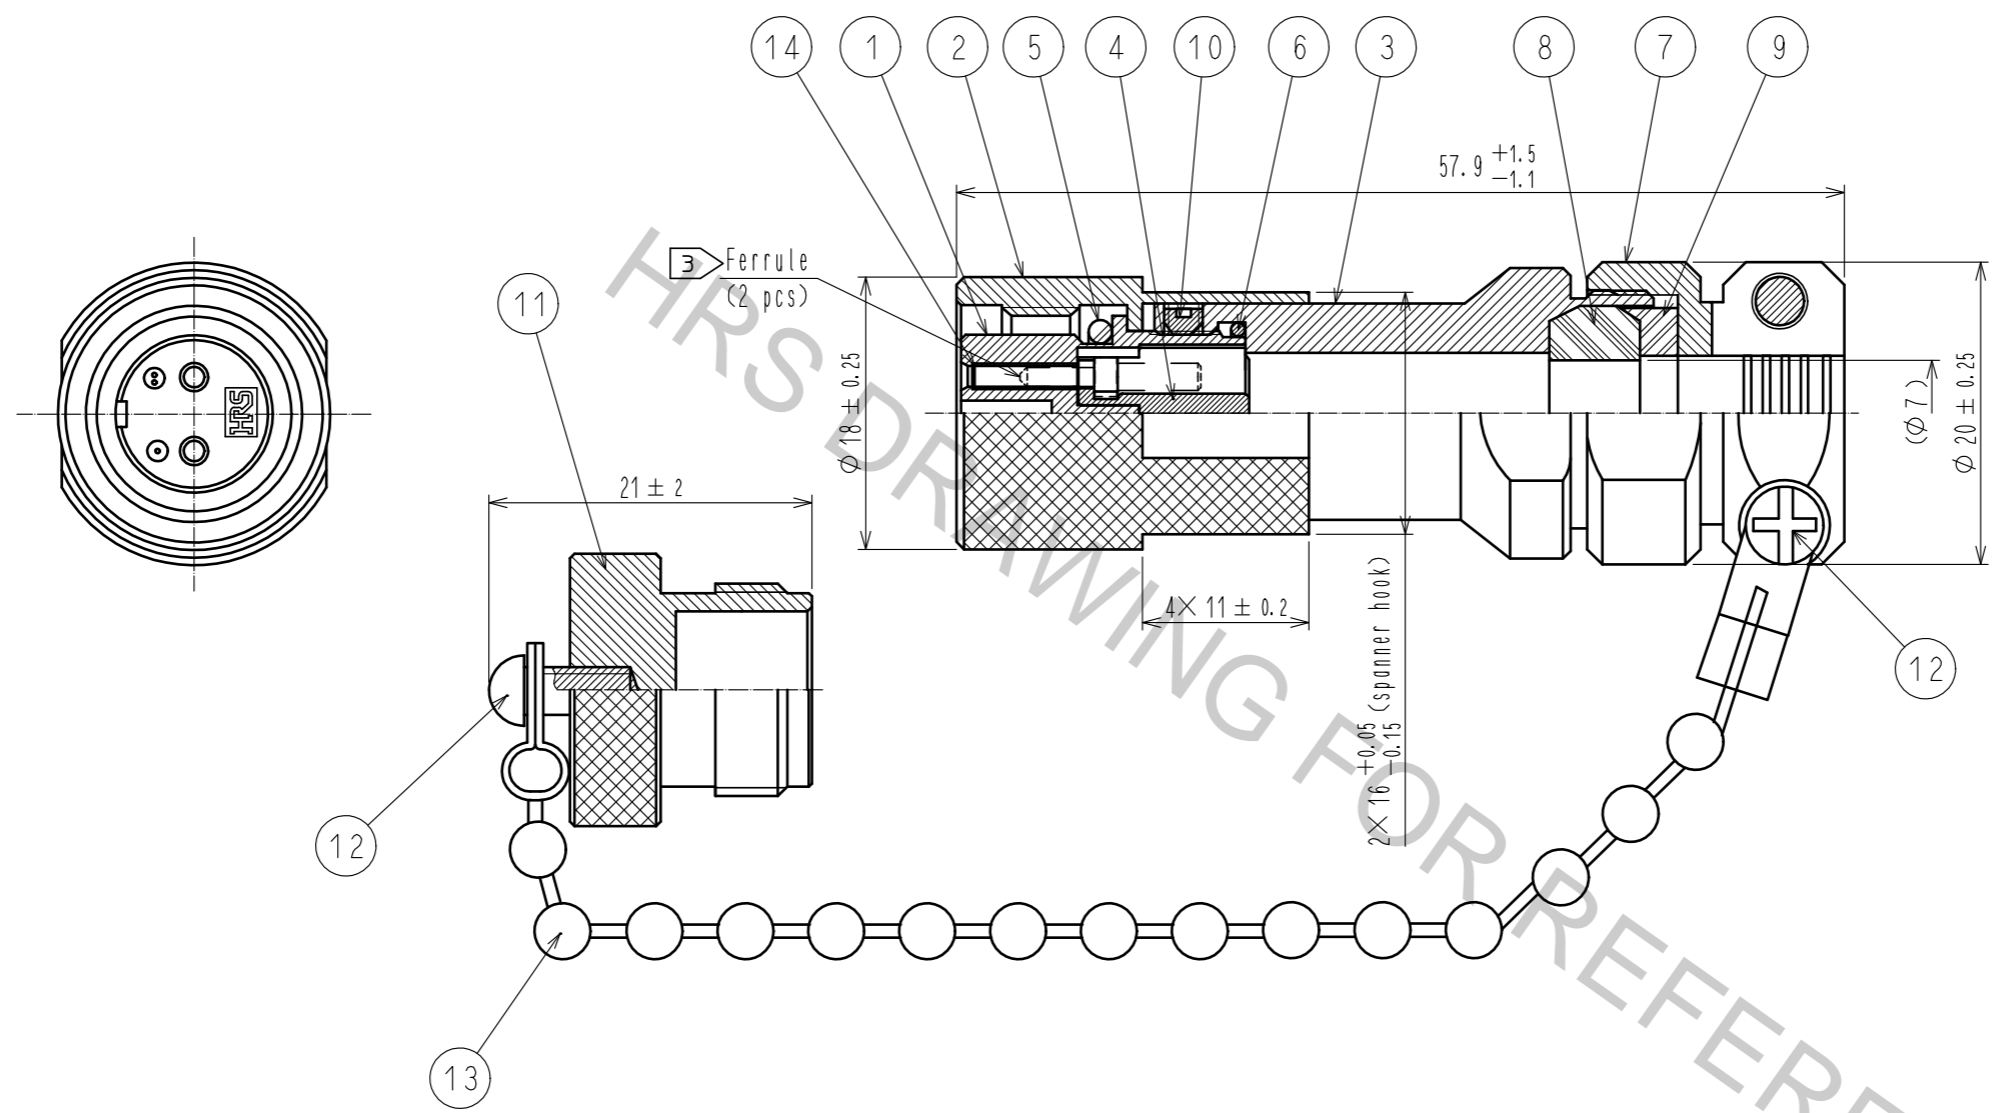


NOTE 1. The procedure of cable assemblies would be confirm.  
 2. When this plug is mated with a MF10S receptacle,  
 the clamp torque of the part No. ② should be 1.5 to 3 N·m.  
 Following MF10-T1 can be used as simple  
 substitution of a torque wrench.

EXCLUSIVE PLASTIC SPANNER	PART NO.	CODE NO.
	MF10-T1	CL709-0205-8

③ The ferrule parts are not contained.  
 Please use the 'standard MU ferrule' chosen from  
 the outer diameter of the optical fiber.

7	BRASS	CHROME PLATING	14	ZIRCONIA	
6	NBR RUBBER	COLOR:BLACK	13	STAINLESS STEEL	
5	NBR RUBBER	COLOR:BLACK	12	STAINLESS STEEL	NYELOCK
4	ZINC DIECAST	NICKEL PLATING	11	ALUMINIUM ALLOY	ANODIC OXIDE COATING
3	ALUMINIUM ALLOY	ANODIC OXIDE COATING	10	STAINLESS STEEL	
2	BRASS	CHROME PLATING	9	PPS RESIN	COLOR:BLACK
1	ZINC DIECAST	CHROME PLATING	8	NBR RUBBER	COLOR:BLACK
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	1				
 HIROSE ELECTRIC CO., LTD.			APPROVED : MT. SHIBUTANI 18.02.01 CHECKED : FS. YOSHIDA 18.02.01 DESIGNED : TY. SATO 18.02.01 DRAWN : MK. INOUE 18.02.01	DRAWING NO. EDC-178122-31-00 PART NO. MF10S-WP7C50-0200(31) CODE NO. CL709-0211-0-31		