Alle Rechte vorbehalten/ *All rights reserved*

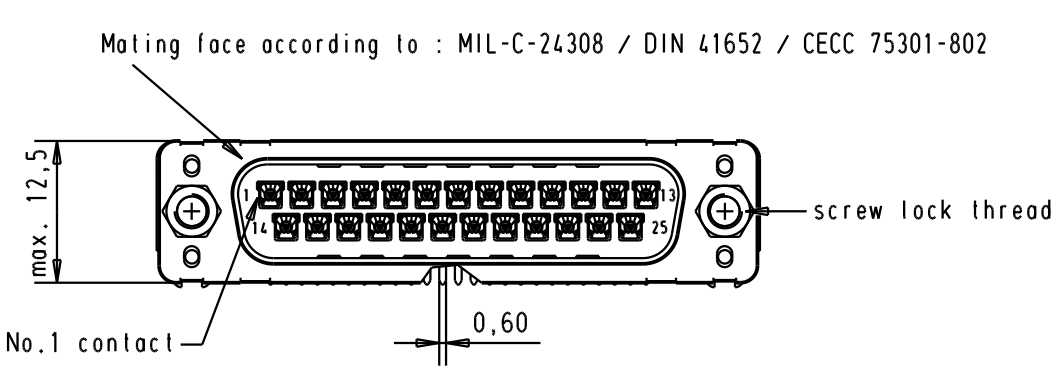


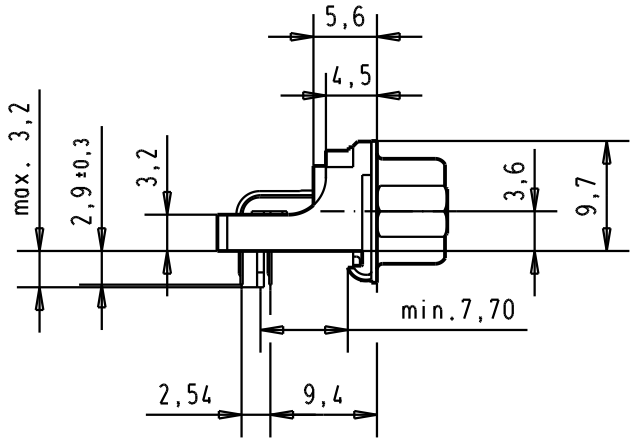


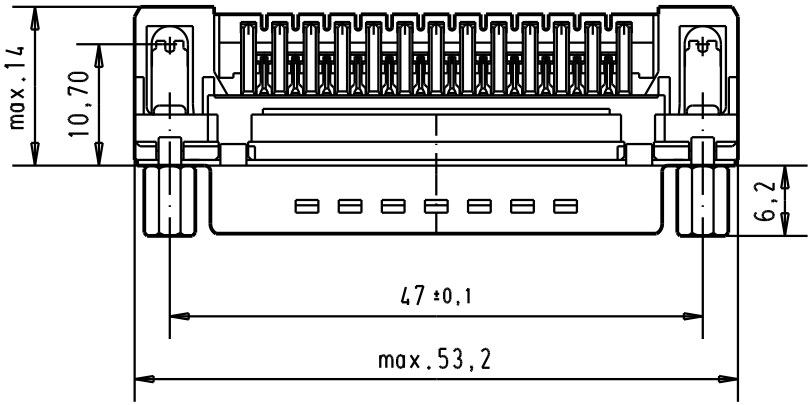


PCB layout hole
component side

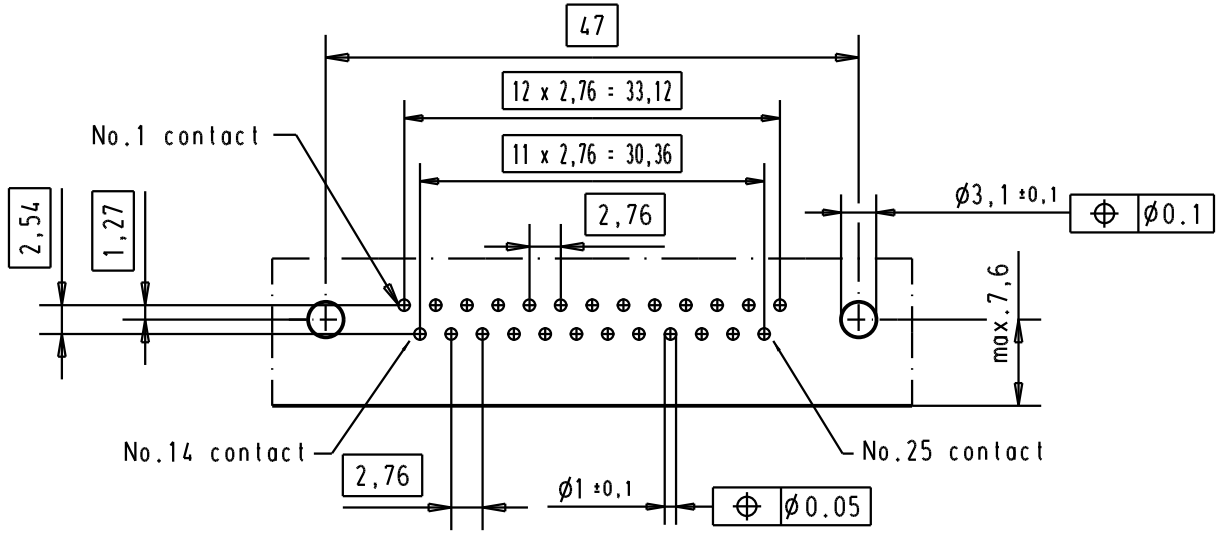


Connector retention and assembling forces on the PCB = 25 / 80 newtons

| | | | | | | | Dat. | Name | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Detail. | 05/03/02 | CV | All Dim. in mm Orig. Size DIN A 4 | D-Sub, high temperature, male, low profil, 25 poles, with solder pins 2.9, screw lock and grounding board lock. | Maßstab/ *Scale* 1.5:1 |
| | | | | | | Insp. | | | | | |
| 09 65 366 3817 | 4-40 UNC | 1 | 31892 | 22/04/04 | JH | Stand. | | | | | |
| 09 65 366 6817 | 4-40 UNC | 2 | 31084 | 04/09/02 | YT | HARTING EURL F-95972 Paris | | | | TB 0965366x81x | Blatt/ *Page* 5 |
| 09 65 366 7817 | 4-40 UNC | 3 | 29723 | 05/03/02 | CV | | | | | Sub. | |
| Part number | Screw lock thread | Performance level | Mod. | Dat. | Name | | | | | | |