


Revision No. 变更数	Revisions 变更事项	Changed 修改者	Date 日期	Approved 确认者	Date 日期
①	+170°C was +160°C/ +170°C 修改前为+160°C	HuangSheng	10/Feb/2009	Kaz	10/Feb/2009
②	ETFE was Tefzel/ ETFE 修改前为Tefzel	HuangSheng	12/Feb/2009	Kaz	12/Feb/2009
③	ADD E193818	HuangSheng	15/May/2009	Kaz	15/May/2009
④	-80°C was -46°C/ -80°C 修改前为-46°C	WangWupe i	14/Dec/2009	Kaz	14/Dec/2009
⑤	Add Parameters 增加参数	Jack Hua	14/Jun/2011	Kaz	14/Jun/2011
⑥	Add Parameters 增加参数	Jack Hua	2/Apr/2013	Kevin	2/Apr/2013

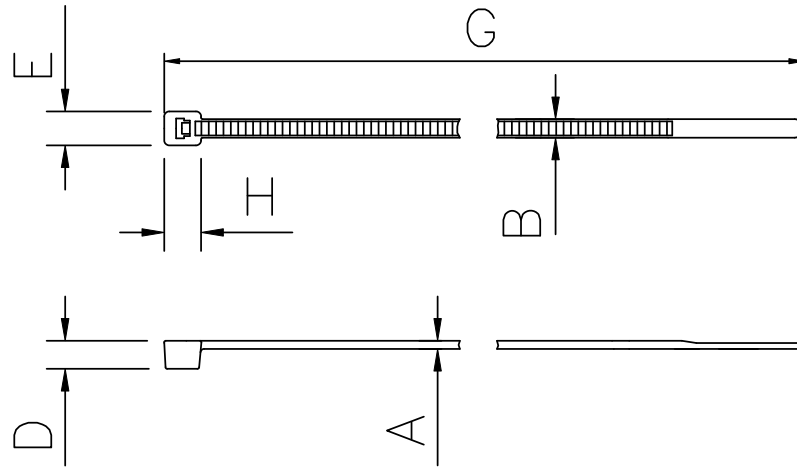

UL 编号
UL File-No. E193818

适用绑扎工具
Applicable Tool
MK9

Standard Packing
标准包装
50根/袋, 40袋
(共2000根) /箱
50 Pcs/bag, 40 bags
(Total 2000Pcs)/box
100根/袋, 20袋
(共2000根) /箱
100 Pcs/bag, 20 bags
(Total 2000Pcs)/box

Min. Loop Tensile Strength
最小环形拉断力
535N


Bundle Diameter
捆扎直径
15.0 to 105.0

Dimension Units/尺寸单位
mm

PERFORMANCE / 性能
SPECIFICATION / 标准

Product code 型号	Material/材料:	Color/颜色	Continuous Operation Temperature/适用温度范围	Flame Rating 耐燃性	A	B	D	E	G	H
T120R-TZ	氟素树脂 耐热, 耐候型 /ETFE	蓝色/BLUE	-80°C~+170°C	UL94V-0	1.9±0.2	7.4±0.2	8.7±1.0	12.95±1.0	387.0±10.0	12.0±1.0
T120R2HALK2	氟素树脂 耐热, 耐候型 /ECTFE	红色/RED	-80°C~+150°C							
T120R-HR ⑥	尼龙46(聚酰胺) 耐热型 /Nylon 46 (Polyamid46)	棕黄色/Beige	-40°C~+130°C							

CAD



Drawn/制图 HuangSheng 15/Oct/2008
Approved/审核 唐传文 15/Oct/2008

Scale/比例 NO /无

Title/品名

the copyright of this drawing is reserved by
HELLERMANNTYTON.
it is issued on condition that it is not
reproduced, copied or disclosed to a third
party, either wholly or in part, without the consent
of HELLERMANNTYTON.

HellermannTyton

海尔曼太通(无锡)电器配件有限公司
(WUXI) Electrical Accessories Co., Ltd.
Tel: +86-510-85282536
Fax: +86-510-85280112

T120R-Series

Drawing-No/图号

QDQ127-00B-06

Format/格式
A4