

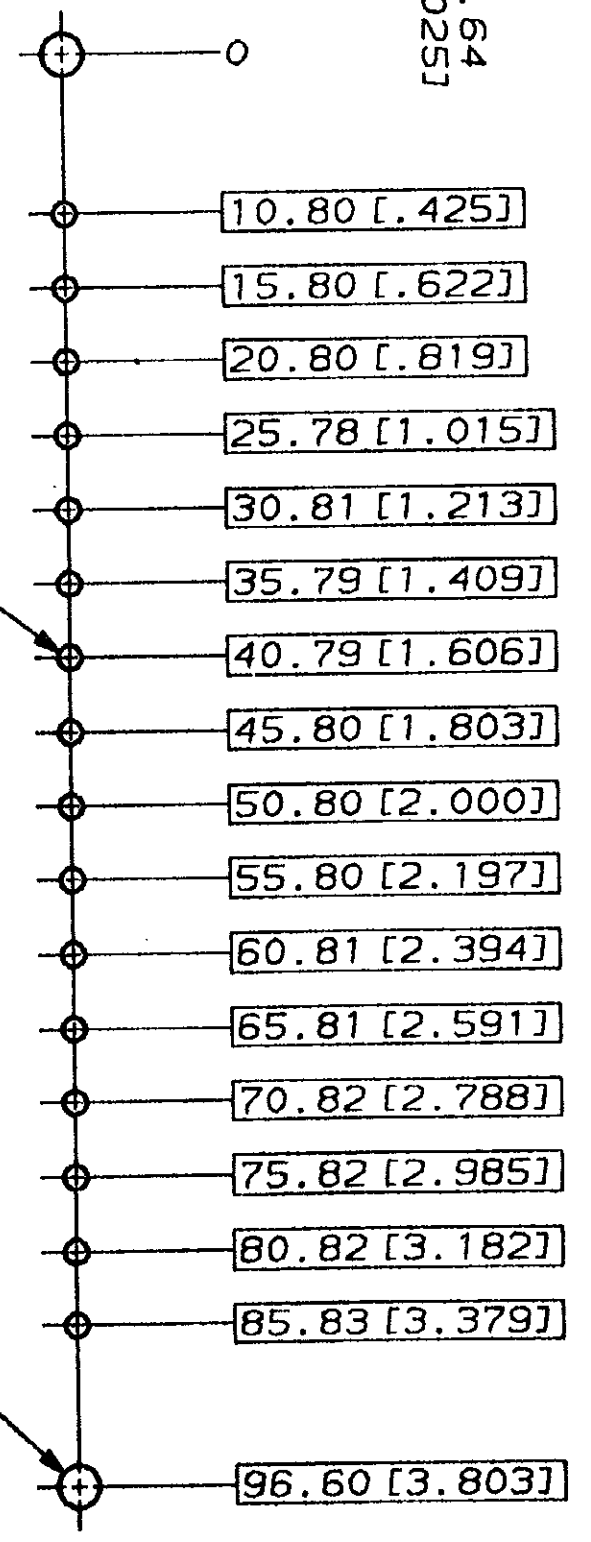
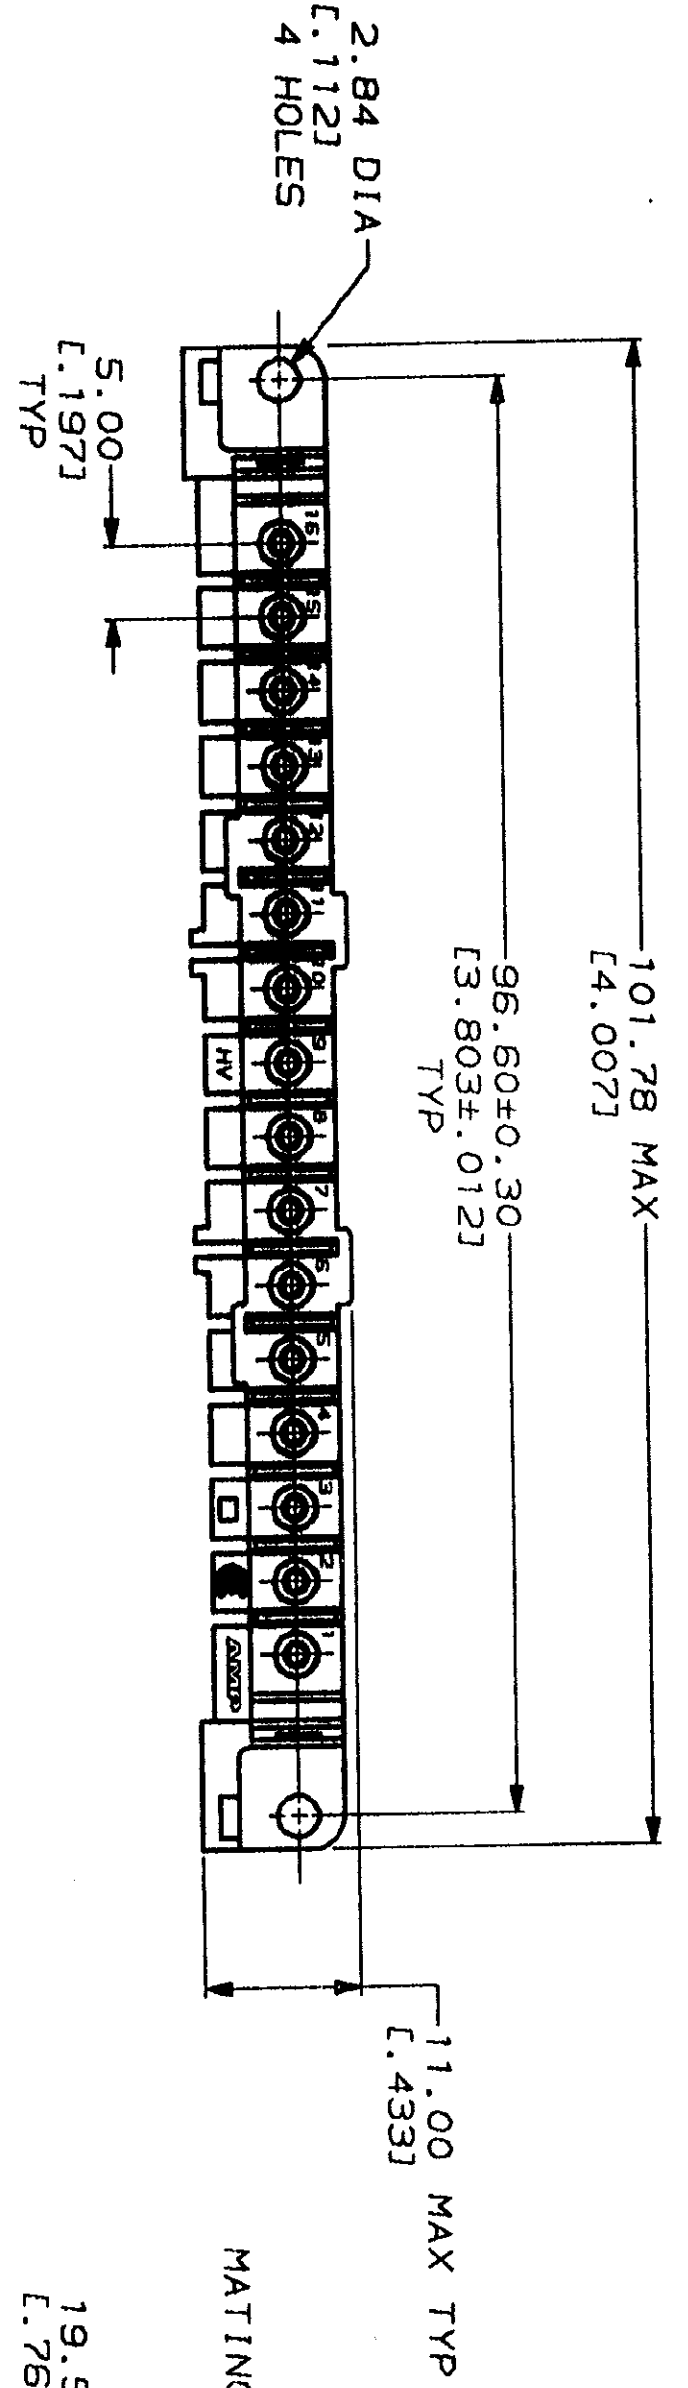


REV	LOC	Q137	ZONE	LTR	DESCRIPTION	DATE	APPD
1	BD	37		6	REDRAWN WITHOUT CHANGE	08/07/82	

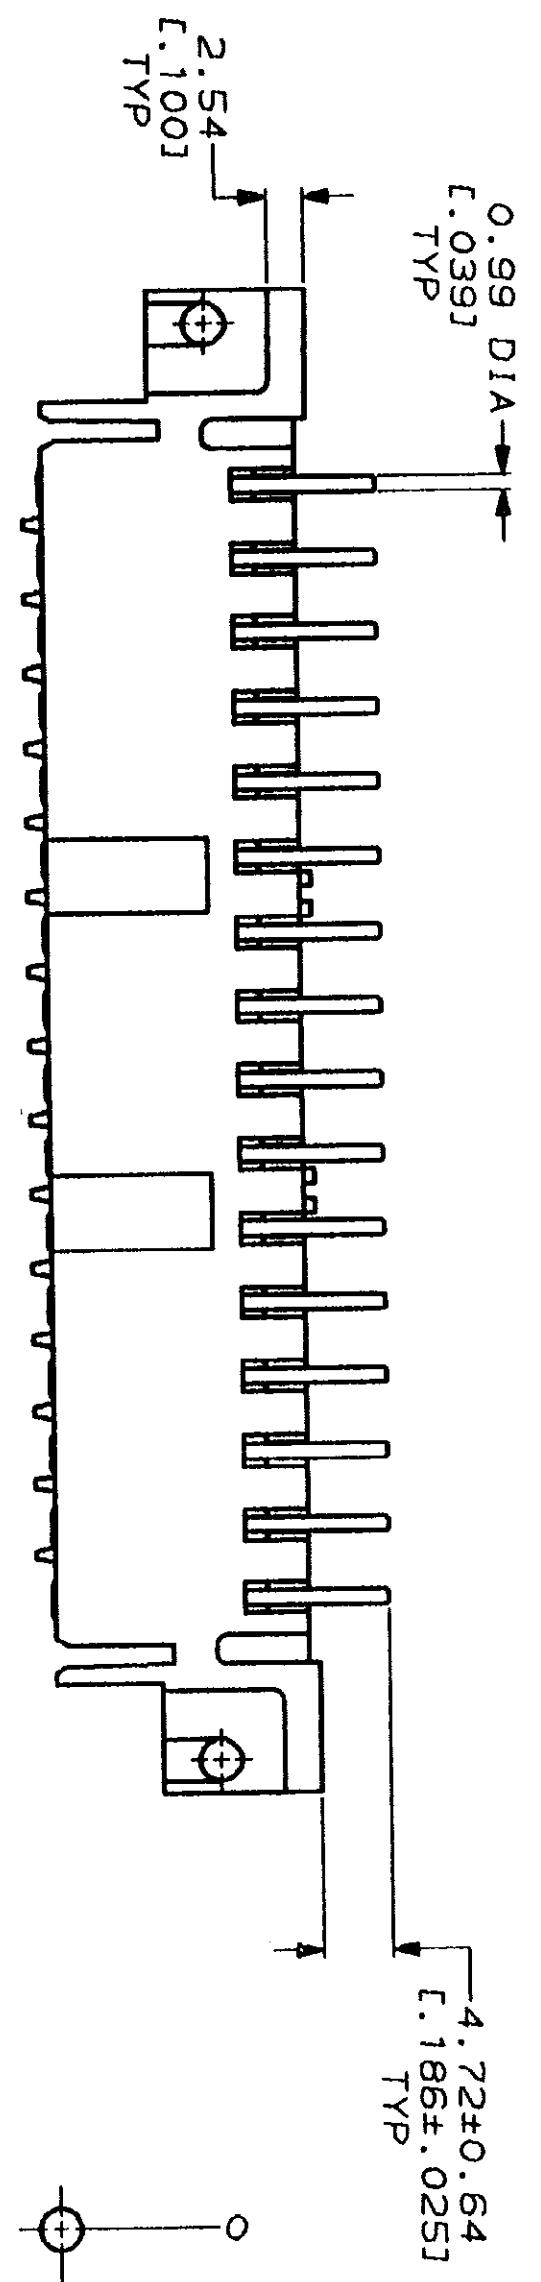

RECOMMENDED PC BOARD LAYOUT

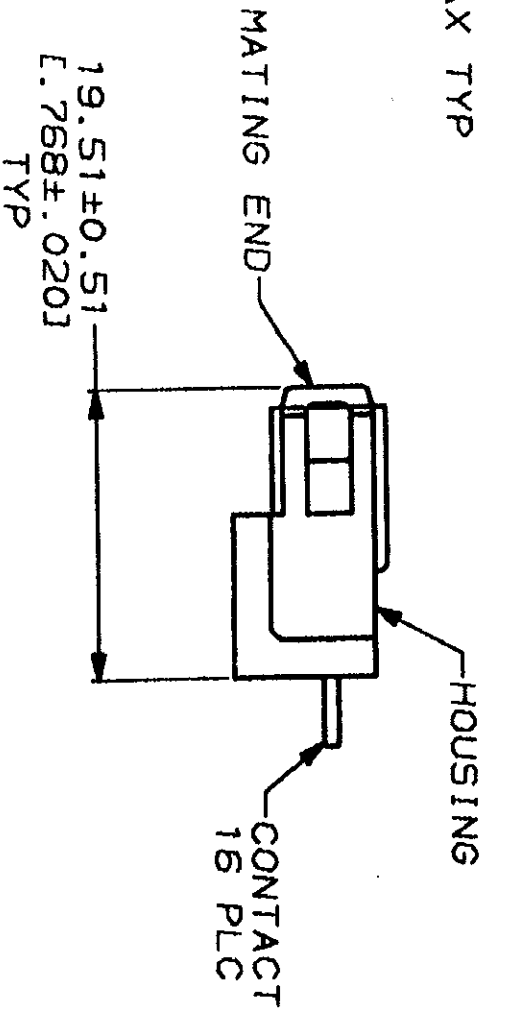

- 1 NYLON, RED.
- 2 PHOSPHOR BRONZE.
- 3 3.81µm [L.000150] MIN TIN-LEAD OVER 1.27µm [L.000050] MIN NICKEL.
- 4 0.76µm [L.000030] MIN GOLD FOR A LENGTH OF 5.08 [L.200] MIN FROM MATING END, 3.81µm [L.000150] MIN TIN-LEAD FOR A LENGTH OF 5.36 [L.211] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [L.000050] MIN NICKEL.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON: 1 PLC DEC ± 0.25 [L.010] 2 PLC DEC ± 0.25 [L.010] 3 PLC DEC ± 0.25 [L.010] ANGLES		DR 08/07/82 L.SIPE		NAME	
MATERIAL		CHK 8-25-92 R.STONE		AMP	
HOUSING: 1		APPD 8-25-92 A.TRAVIS		AMP Incorporated	
CONTACTS: 2		PRODUCT SPEC		Harrisburg, PA 17105-3608	
CONTACTS: SEE TABLE		APPLICATION SPEC		SOCKET HEADER ASSEMBLY, 16 POSN, IN-LINE, METRIMATE	
FINISH		SCALE 2:1		SHEET 1 OF 1	
CONTACTS: SEE TABLE		CAGE CODE 00779		DRAWING NO. 207615	
CONTACTS: SEE TABLE		WEIGHT		PART NO. 207615-1	

CUSTOMER DRAWING

207615