




断面 A-A
SECT.A-A




断面 B-B
SECT.B-B

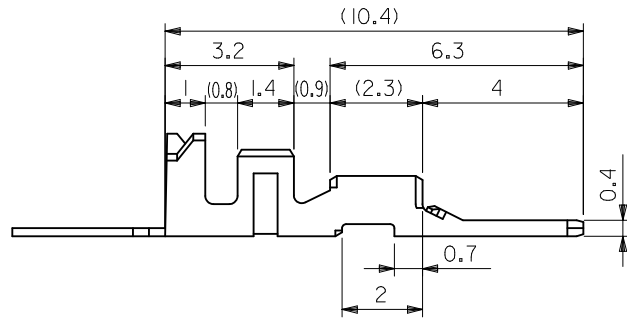

注記
NOTICE

- 1. 適合ハウジングアッセンブリ:
52116-02**
52116-03**
52116-04**
- 1.APPLICABLE HOUSING ASSEMBLY:
52116-02**
52116-03**
52116-04**
- 2. 嵌合相手: 50039-8*00
- 2.MATE: 50039-8*00



50038-8100	バラ状 LOOSE
50038-8000	連鎖状 CHAIN
MATERIAL NO.	形状 FORM

材料 MATERIAL	リン青銅 錫メッキ (+0.2) PHOSPHOR BRONZE TIN PLATING(+0.2)
適用電線範囲 WIRE RANGE	AVS-0.3/0.3F AVSS-0.5/0.5F AVSS-0.3/0.3F CAVS-0.5 CAVS-0.3 AWG #22/#20 ISO-0.5
被覆外径 INS. RANGE	φ1.4-1.9

REVISED EC NO: JTR2012-0084 2012/02/29 DRMNS: SANO 2012/03/02 CHKD: SANO 2012/03/16 APPR: MAYAMOTO	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 8:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	DRAWN BY M. ASAOKA	DATE 1996/06/10	TITLE 2.5 WATERPROOF CONN CRIMP PIN			
		10 OVER 30 UNDER	±0.25	CHECKED BY M. SAKANO	DATE 1996/06/10	MOLEX INCORPORATED			
		30 OVER	±0.3	APPROVED BY MAYAMOTO	DATE 2012/02/03	DOCUMENT NO. SD-50038-001	SHEET NO. 1 OF 1		
		ANGULAR ±3 °		MATERIAL NO. SEE CHART		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3					