



Contact arrangement

view from termination side

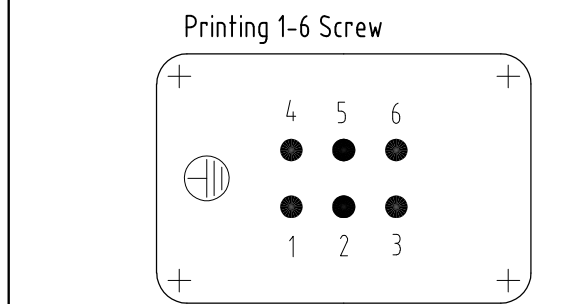

- NOTES:
- SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM
 - SUITABLE HOOD SIZE 3: SERIES HB; HD; HIP; EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264
 - Strip length: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm
 - STANDARDS:
DIN EN 61984; DIN EN 60664-1
 - PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED
 - SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 150 PIECES

QTY	DESCRIPTION	MATERIAL	COLOR	ITEM NO. POS.	NOTES SURFACE
4	fixing screw	steel	nickel plated	8	M3x10
6	contact spring clamp	brass	silver plated	7	
6	contact socket screw termination	brass	gold plated	6	
6	contact socket screw termination	brass	silver plated	5	
1	cover spring clamp version		light grey	4	
1	cover crimp version		light grey	3	
1	cover screw version		light grey	2	
1	socket insert		light grey	1	

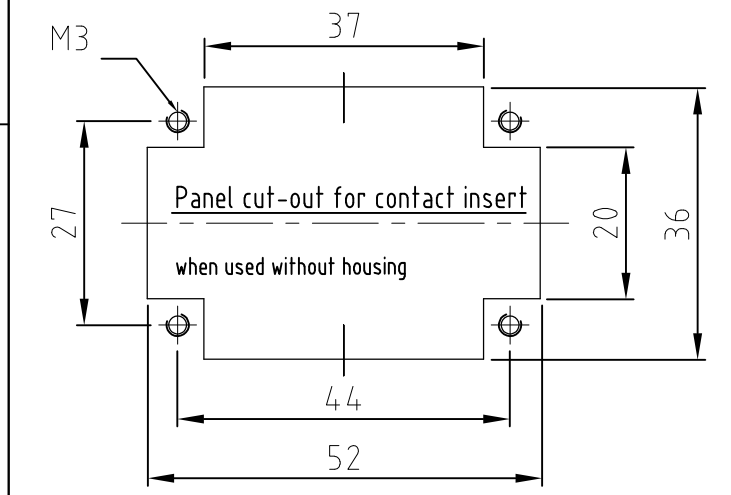

ORDERING TEXT / BESTELLTEXT

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. DIMENSIONS: DIMENSIONEN: mm. TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN. ISO 8015. ISO 2768 - mH - E. DIN 16901 - 14.0. ANGLES / WINKEL #. FINISH / OBERFLÄCHE / FARBE.

DWN: Gräf 12.02.1999. CHK: Schweiger 18.02.1999. APVD: -. PRODUCT SPEC: -. APPLICATION SPEC: -. WEIGHT: -. MATERIAL: -. CUSTOMER DRAWING: /KUNDENZEICHNUNG.

AMP HTS Elektrotechnik 53819 Neunkirchen, Germany. NAME: Female insert HE.6.BU.C/S. SIZE: A3. CAGE CODE: 00779. DRAWING NO: 1103635. RESTRICTED TO NUR FUER: -. SCALE: MASSSTAB 1:1. SHEET: BLATT 1 OF 1 VON 1. REV: A8.