
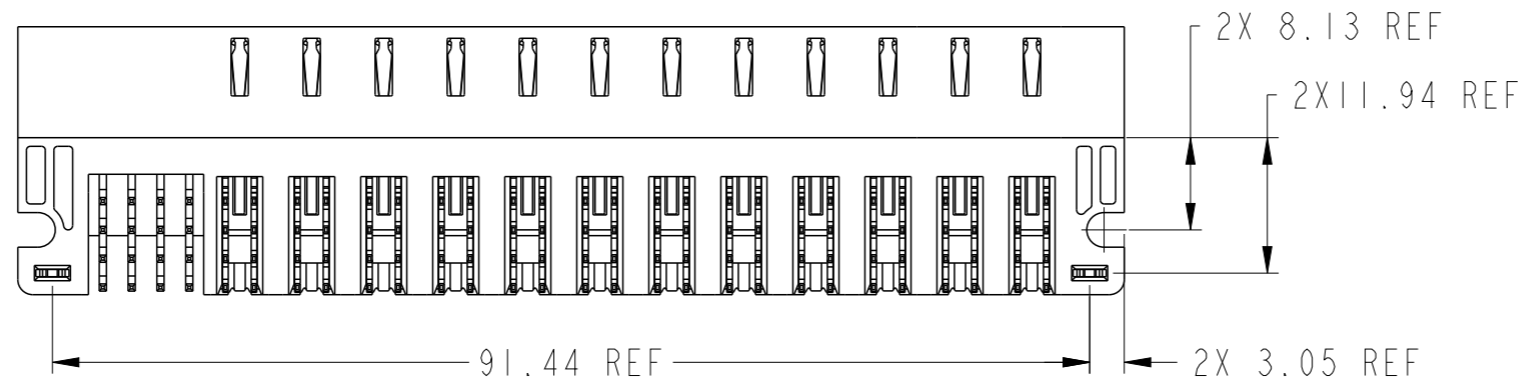
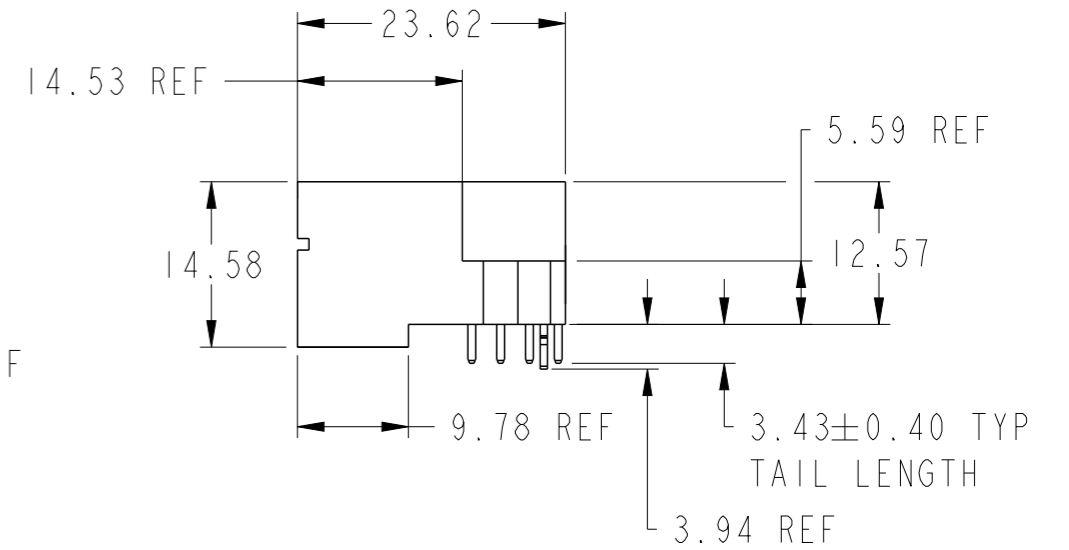
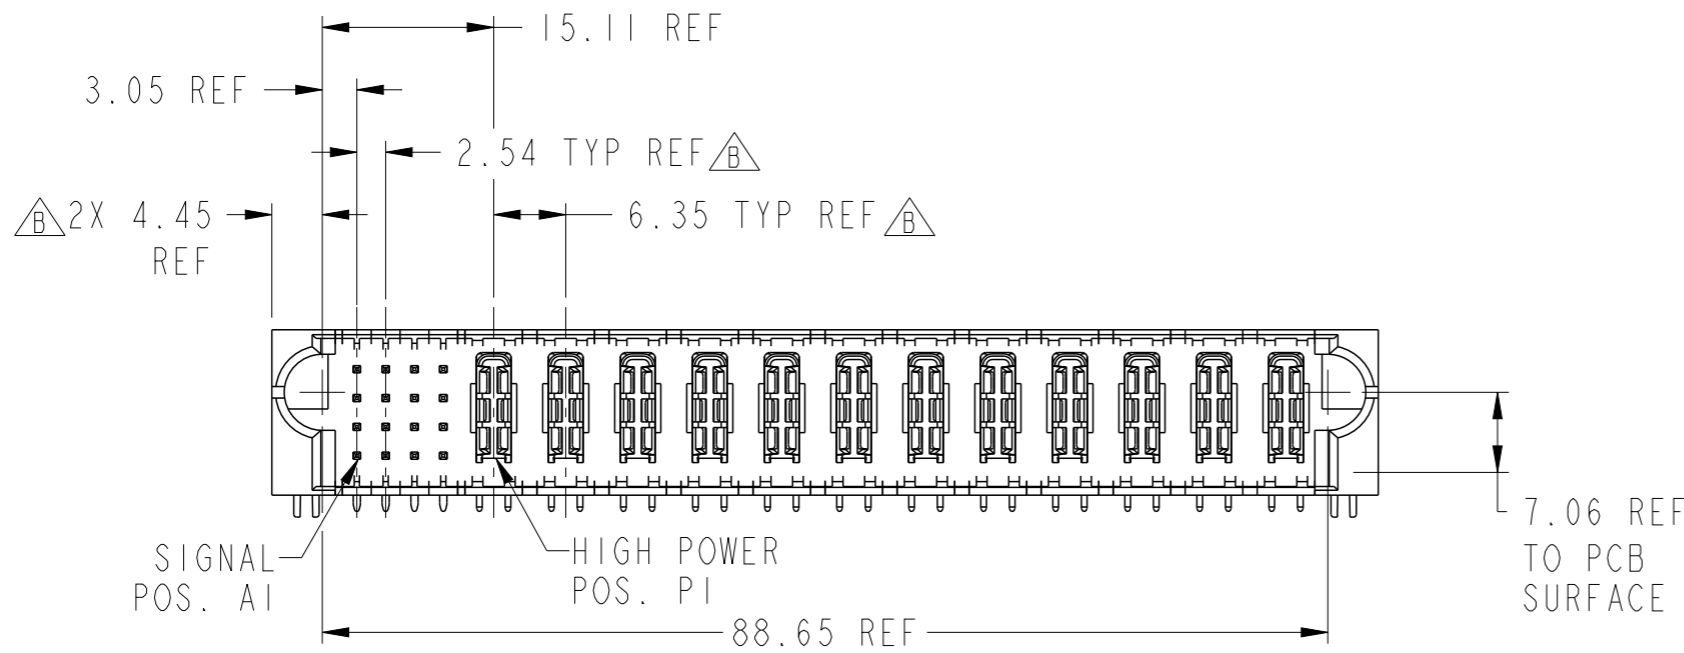



PART NUMBER 10106124-C004001LF

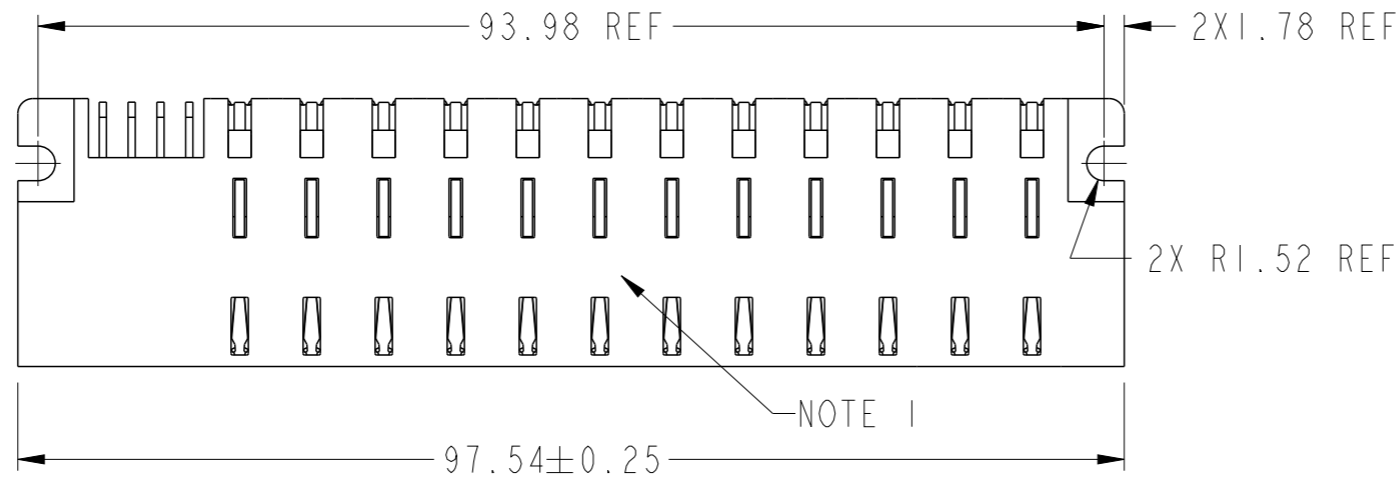

spec ref	-	dr	Peng-Bing Fu	2012/03/20	projection	MM	size	A3	scale	3:2														
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2012/11/13			ecn no	ELX-DG-013143-1																
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	2012/11/15			product family	PwrBlade+	rel level	Released														
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.50</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	linear	0.X	±0.50		0.XX	±0.25		0.XXX	±0.10	angular	0°	±2°	appr	Pei-Ming Zheng	2012/11/15			part no	16S + 12HP	dwg no	10106124-C004001	rev	B
linear	0.X	±0.50																						
	0.XX	±0.25																						
	0.XXX	±0.10																						
angular	0°	±2°																						
ASME Y14.5		www.fci.com		cat. no.	Product - Customer Drw			sheet 1 of 3																

Copyright FCI.

PRODUCT NO.	ROWS	SIGNAL														HIGH POWER		
		E1	1	2	3	4	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
10106124-C004001LF	DCBA	HA	HHUU	TTTT	SSSS	RRRR	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	H1	HA

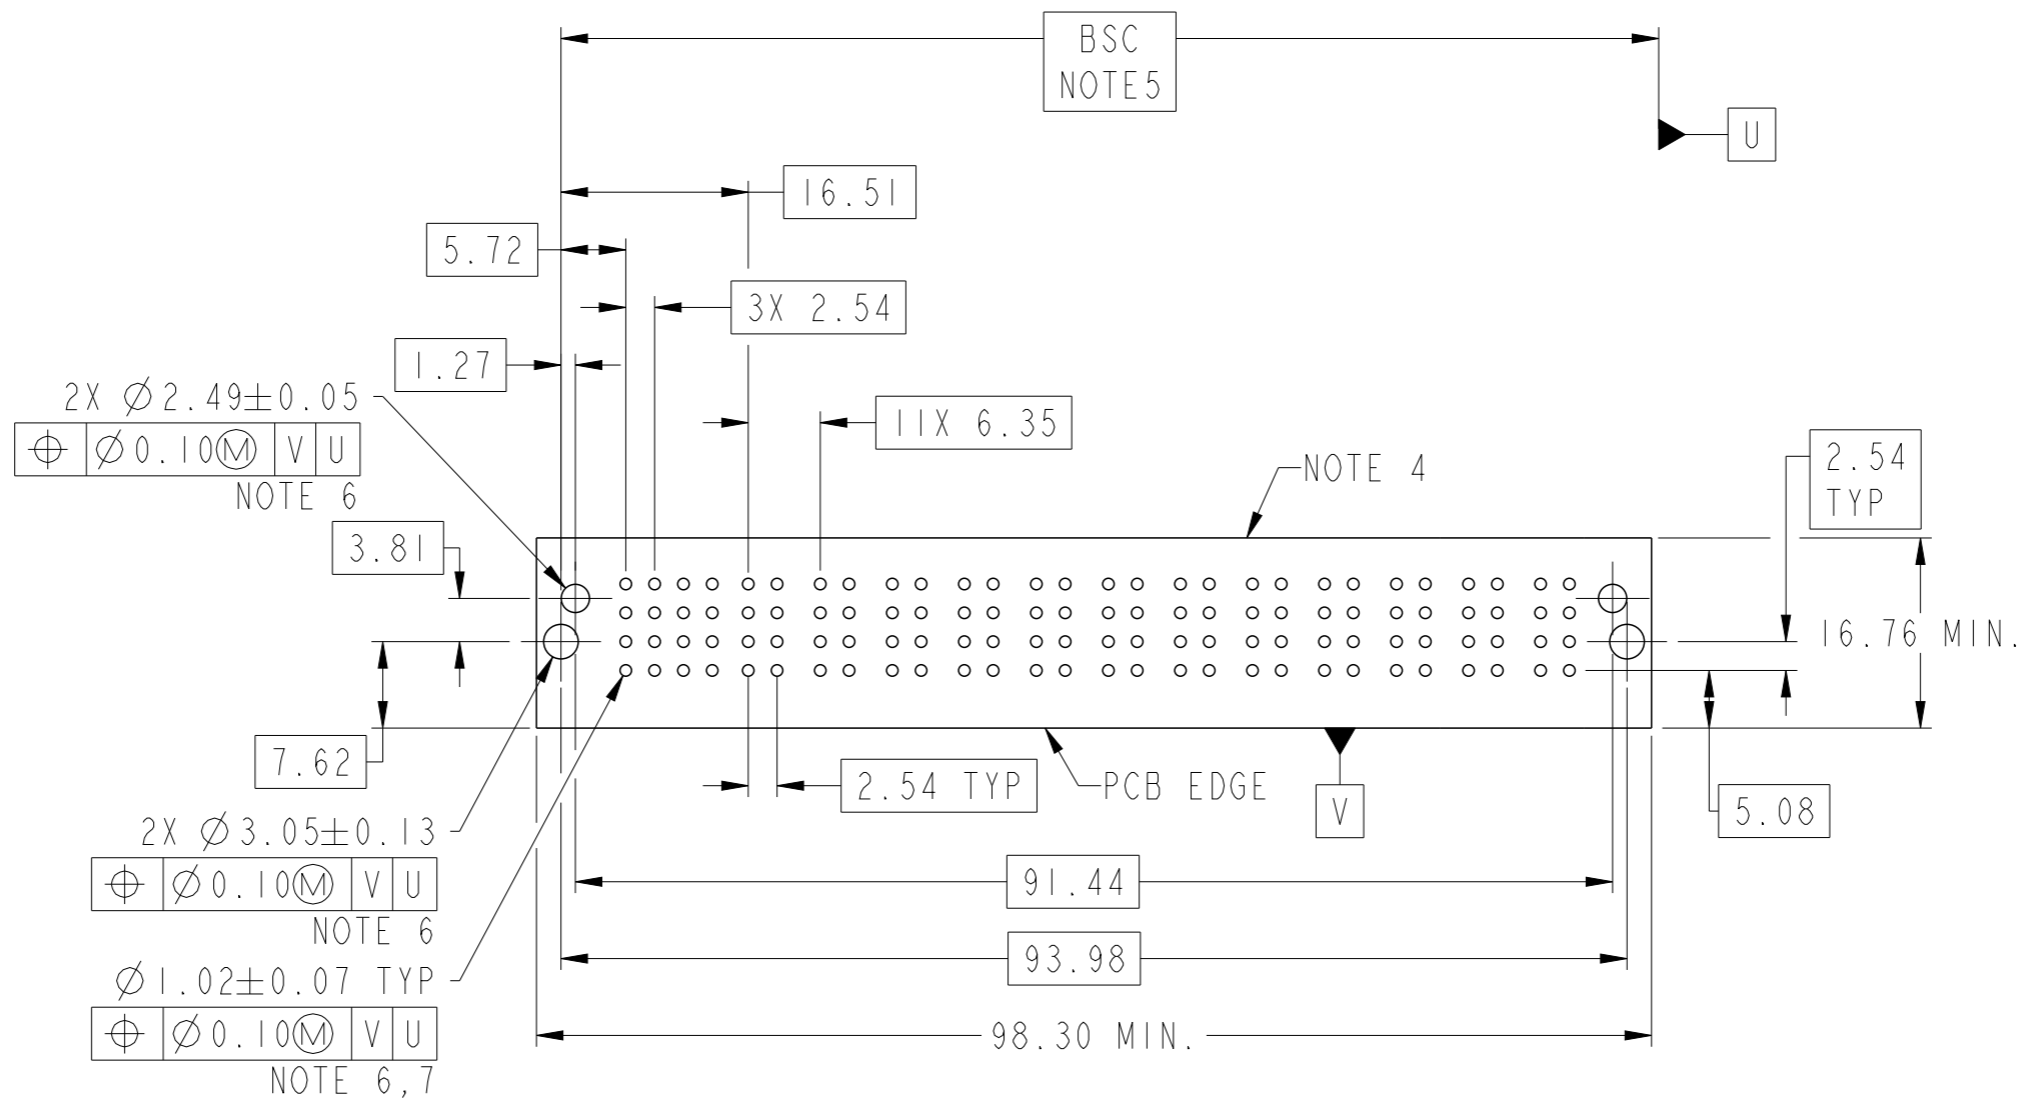



CODE	DESCRIPTION
H1	STD HIGH POWER CONTACT
HA	METAL HOLD DOWN
H	FBLM, SIGNAL CONTACT ROW D
R	STD SIGNAL CONTACT, ROW A
S	STD SIGNAL CONTACT, ROW B
T	STD SIGNAL CONTACT, ROW C
U	STD SIGNAL CONTACT, ROW D

spec ref	-	dr	Peng-Bing Fu	2012/03/20	projection	MM	size	A3	scale	3:2
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2012/11/13			ecn no		ELX-DG-013143-1	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Shao-Qi Kuang	2012/11/15			product family		PwrBlade+	
surface	ASME Y14.5	appr	Pei-Ming Zheng	2012/11/15						
linear	0.X ±0.50			16S + 12HP RA SOLDER HEADER		dwg no 10106124-C004001		rev B		
angular	0° ±2°	www.fci.com		cat. no.		Product - Customer Drw		sheet 2 of 3		







Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENSIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
-  9) A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.



Copyright FCI.

spec ref -		dr	Peng-Bing Fu	2012/03/20	projection	MM	size	A3	scale	3:2			
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Peng-Bing Fu	2012/11/13			ecn no		ELX-DG-013143-1				
ASME Y14.5		chr	Shao-Qi Kuang	2012/11/15			product family		PwrBlade+		rel level		Released
surface 		linear	0.X	±0.50				part no		16S + 12HP		dwg no	10106124-C004001
		0.XX	±0.25	RA SOLDER HEADER									
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw		sheet 3 of 3					