


NOTES:
 1.0 ELECTRICAL SPECIFICATIONS
 1.1 FREQUENCY RANGE: DC to 4.0 GHz
 1.2 VSWR (MAX):
 DC to 2.0 GHz: 1.15:1
 2.0 to 4.0 GHz: 1.25:1
 1.3 MAXIMUM INPUT POWER:
 0.5 WATTS MAX AT +25°C
 1.4 IMPEDANCE: 50 OHMS
 1.5 TEMPERATURE RANGE:
 -65°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN
 (REF.: INK-02638-27-21)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

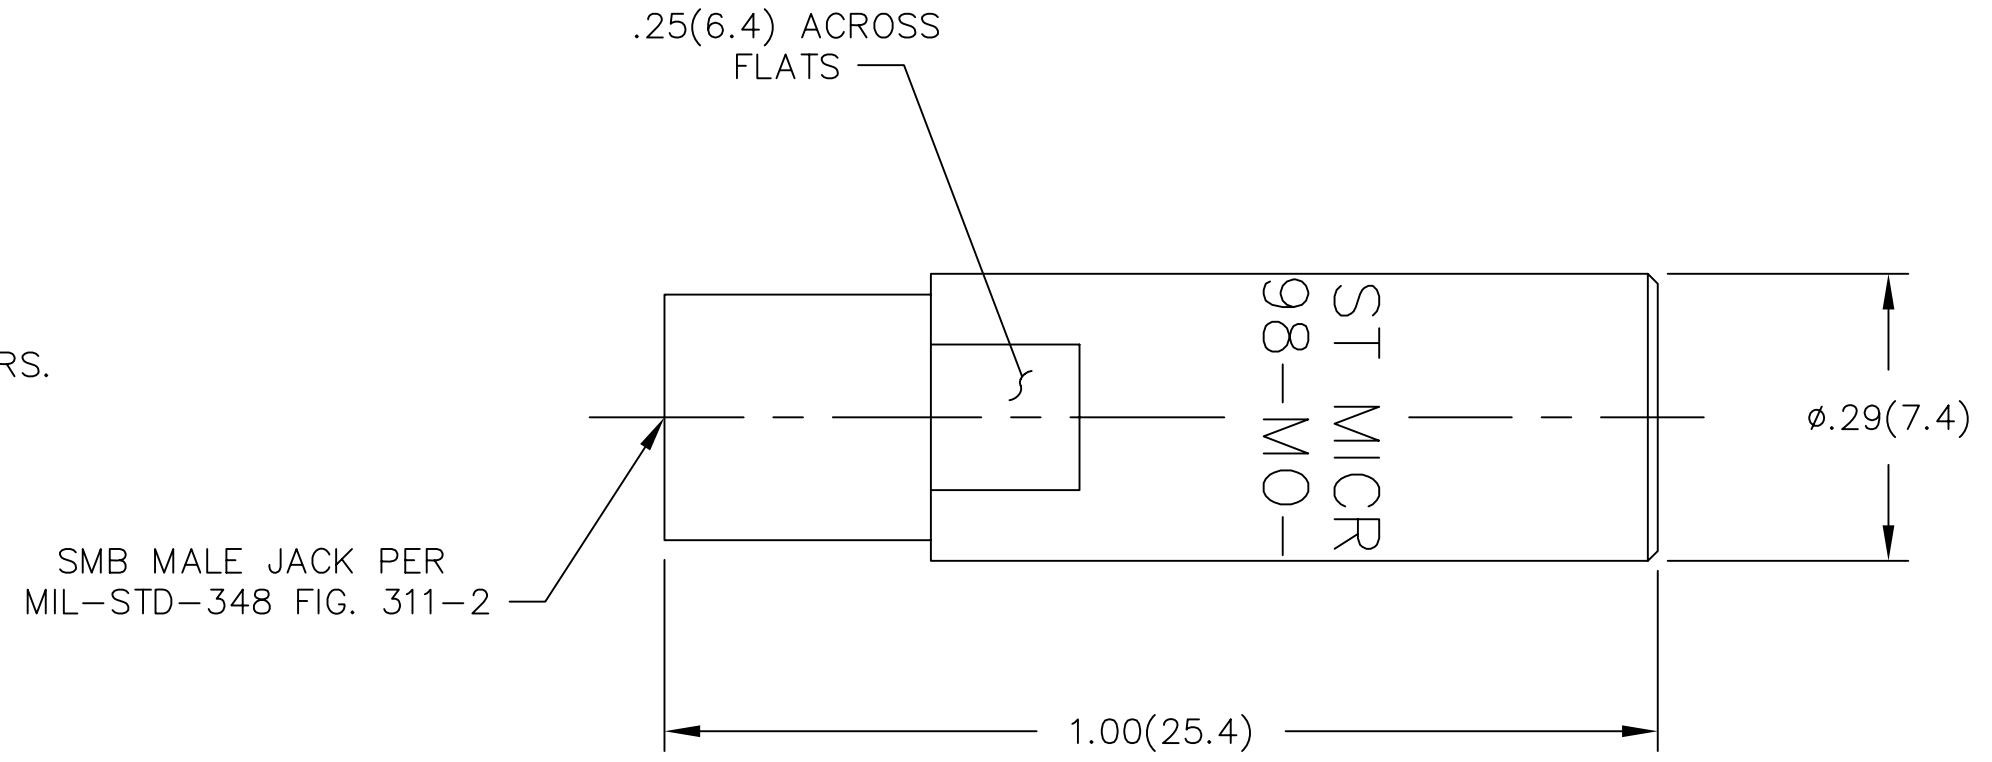

REV.	DESCRIPTION	DATE
-	RELEASED	3/24/96
-1	ADDED TITLEBLOCK	11/14/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO.	34078 MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE
			TERMINATION SMB MALE JACK
	DRAWN/DATE A.BEATTY 2/27/96		ENG./DATE P.GOODMAN 3/21/96
CHECKED/DATE M.STAFFORD 3/13/96		APPROVED/DATE	TRM-2198-MO-SMB-02
		SCALE: 5=1	SHEET 1 of 1