

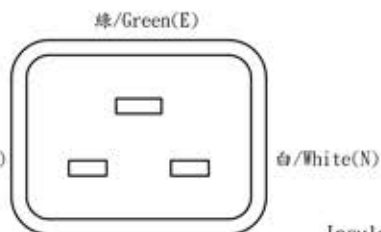


| 插頭部件 (Plug Component) | | | 頭部削皮尺寸 (Plug strip dimension) | | | 線材規格(Wire Spec.) | 尾部削皮尺寸 (Terminal roj & Strip) | | | 尾部處理 (Terminal Component) | | |
|---------------------------------------|-------------------------------------|----------|----------------------------------|---------|------------|--|----------------------------------|-------------------------------|------------|------------------------------|--|----------|
| 顏色(Color) | 零件描述(Component) | 數量(Q'ty) | 內削(Strip) | 外削(Roj) | 顏色(Color) | | 外削(Roj) | 內削(Strip) | 顏色(Color) | 顏色(Color) | 零件描述(Component) | 數量(Q'ty) |
| 35P紅色 90A+2A Red | FM-320 (15A 250V-) (IEC 320 C20) | 1 | 5 ⁺¹ ₋₀ | 20±1 | 黑/Black(L) | SJT 14AWG/3C 105°C 紅色(Red) 線長: (Length) 876.3 ^{+50.8} _{-12.7} | 16±1 | 5 ⁺¹ ₋₀ | 黑/Black(L) | 35P紅色 90A+2A Red | ME-302 (15A 250V-) (IEC 320 C13) | 1 |
| 鍍鎳 (Computer power cord terminal) | 2.0x6.0電腦電源線端子 | 1 | 5 ⁺¹ ₋₀ | 20±1 | 白/White(N) | | 16±1 | 5 ⁺¹ ₋₀ | 白/White(N) | 銅本色 (Copper) | 電腦電源線端子 (Computer power cord terminals) | 3 |
| 鍍鎳 (Computer power cord terminals) | 2.0x5.0電腦電源線端子 | 2 | 5 ⁺¹ ₋₀ | 20±1 | 綠/Green(E) | | 16±1 | 5 ⁺¹ ₋₀ | 綠/Green(E) | 黑色(Black) | ME-302兩件式內模 (ME-302 Inner Body) | 1 |
| 黑色(Black) | FM-320兩件式內模 (FM-320 Inner Body) | 1 | | | | | | | | | | |

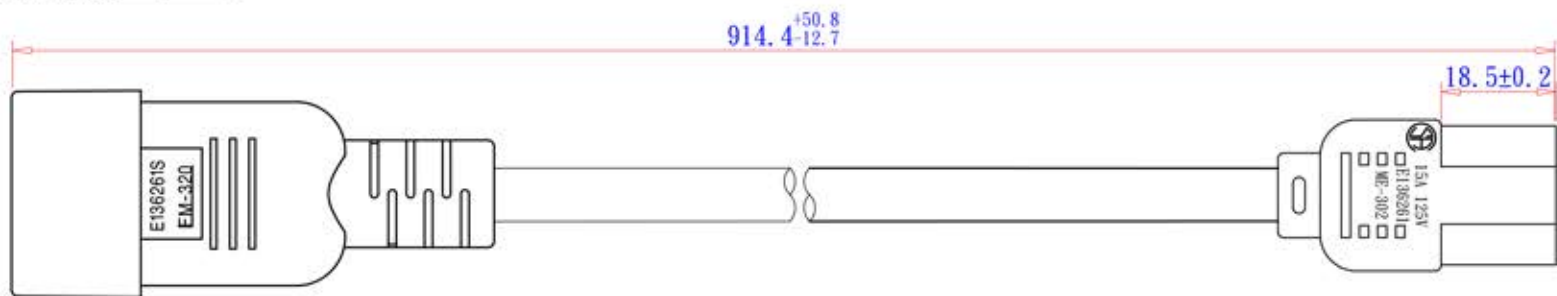

插頭端面圖
(Dimensions of Plug Face)

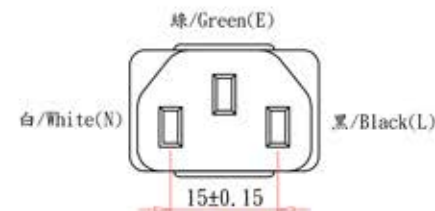


插頭端面圖
(Dimensions of Plug Face)

Insulation Thickness 0.76 mm
Overall Diameter 3.45±0.10 mm

Copper Conductor
41/0.254±0.004 mm
Resistance 8.88
(20°C Max). ohms/km)

Jacket Thickness 0.76 mm
Overall Diameter 9.3±0.15 mm



線材截面圖
(Wire Cross-Section)

包裝方式(Packing)

| | |
|------------------------|-----------------------------|
| 扎線方式 (Bulk Pack) | 每 10 條一扎 Per 10 pcs/Ties |
| 紙箱尺寸 (Carton Size) | 480 X 320 X 250 |
| 包裝數量 (Packing Q'ty) | PCS |
| 標籤(Label) | UL Detachable Label |

正例事項
(Carton Print) 依客戶要求印刷
(See Purchase Order)

I. 高壓測試:1500V/1Sec <0.5mA
(Hi-Pot Test:1500v/1Sec <0.5mA)

| | | |
|--|------------------------------------|-------------------------|
| 電線印字內容 Wire Printed | 使用充實線材 四印字 (Un-Filler, Gravure) | 紙箱唛頭標誌 Shipping Mark |
| V E322763 (UL) SJT 14AWG(2.08mm²)x3C VW-1 105°C 300V J/ET c(UL) SJT 14AWG(2.08mm²)x3C FT2 105°C 300V -LF- (UL) SJT 14AWG(2.08mm²)x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 14AWG(2.08mm²)x3C FT2 105°C 300V LL43774 -F- -LF- | | ◊ CnC ◊ |

| SIGNATURE | NAME | DATE | | |
|-------------------|------|--|---------------|---------------------|
| APPROVED | | | 2011 11/26 | 新版發行 |
| M.F.G. CHECKED | | | REV DATE | DESCRIPTION |
| Q.A. CHECKED | | | PART No. | 800-14-19D-RE-0003F |
| DRAWN | 楊承正 | 2011/11/26 | DWG No. | |
| CUSTOMER | | CnC Tech, LLC Industrial Cable and Connector Technology | | |

| | |
|--------|-----|
| SIZE: | A4 |
| UNIT: | mm |
| SCALE: | 1:1 |
| PROJ. | |