

## SUMMARY

### # Wires

Low	0
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	3S
Termination type	HV contact
IP rating	50
Cable Ø	4.30 - 5.70 mm
Matching parts	
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFB*: Straight plug, cable collet and safety locking ring
Keying	
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C57: 4.3 - 5.7 mm
Variant	

### Performance

Configuration	3S.432 : 2 High Voltage
Insulator	T: PTFE
Rated Current	6 Amps

### Specifications

Contact Type:	Solder
Working voltage HV contact - Us (kV rms)	2.1
Test voltage LV Ue (kV rms) -	
Rated current LV (A) -	


### Others

Endurance (Shell): 5000 mating cycles  
Temp (min / max): -55°C / +250°C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Salt Spray Corrosion: >144 hr  
Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
IP Rating: 50

---

## DRAWINGS

### Draws

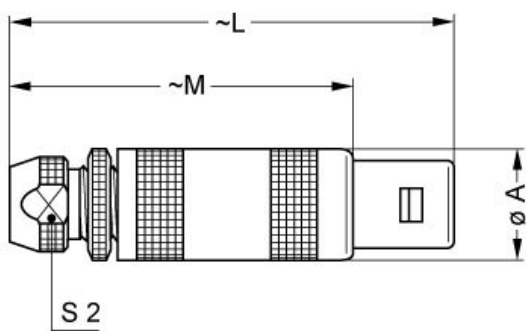

### Dimensions

	A	L	M	S2
mm.	17.8	65	50	14
in.	0,70	2,56	1,97	0,55

---

## RECOMMENDED BY LEMO

### Tools

Spanner wrench: MTZ.3S.500.014

### Cables