


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive,
 please contact a company representative for further information.

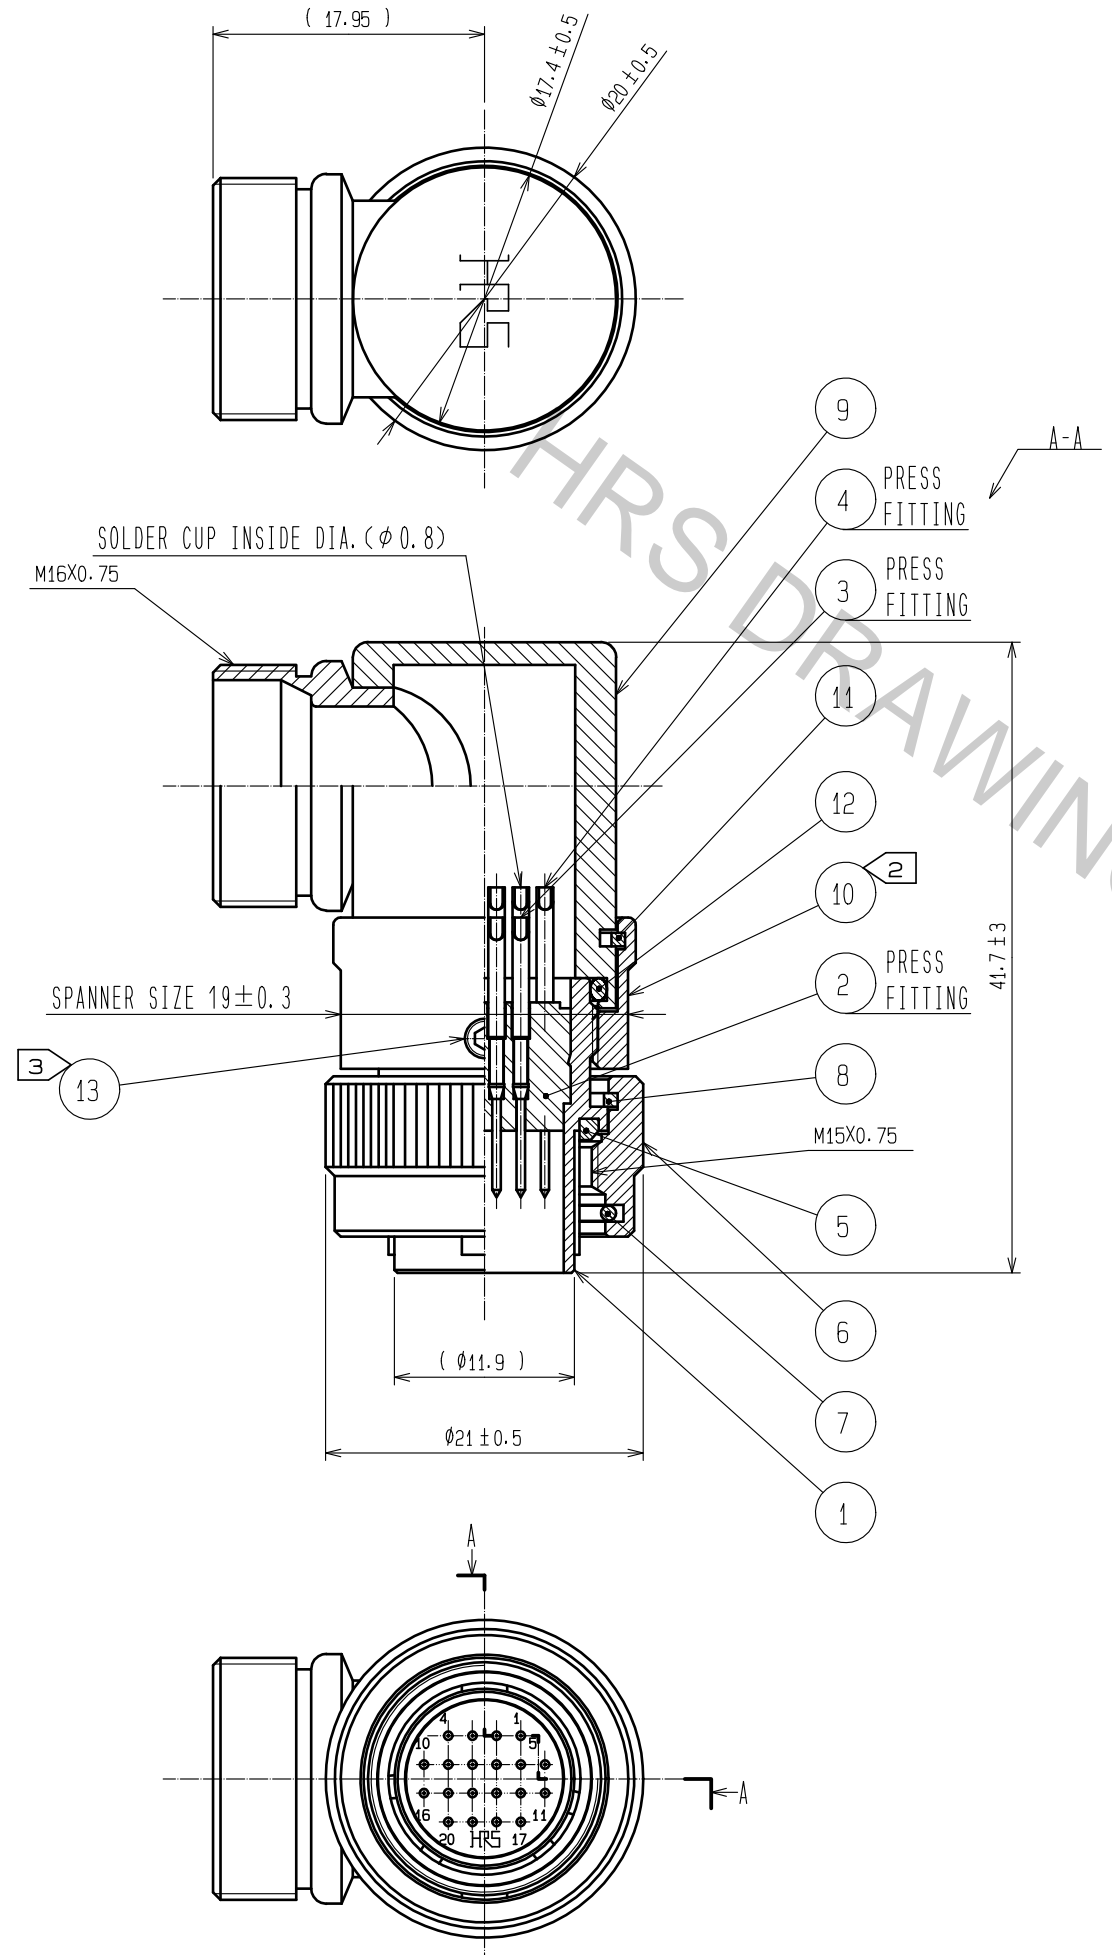

NOTES

- 1 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ② AND ⑩ IS SHOWN.
- 2 THE RECOMMENDED CLAMP TORQUE REF. NO. ⑩: 3 TO 4 N · m.
 LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑩ FROM LOOSENING.
- 3 ACRISS FLATS HEXAGON HEAD OF REF. NO. ⑬: 1.27
 THE RECOMMENDED CLAMP TORQUE REF. NO. ⑬: 0.3 TO 0.4 N · m
 LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ⑬ FROM LOOSENING.
- 4 THIS PRODUCT TO BE USED WITH CABLECLAMP, JR13WCC-*(72)
 * DESIGNATE DIAMETER OF APPLICABLE CABLE.
 LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT FROM LOOSENING.
- 5 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
 DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
7	STEEL	NICKEL PLATING	13	STEEL	JISB1177 HEAGON SOCKET SET SCREW M2. 6X0.45X2
6	BRASS	NICKEL PLATING	12	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
5	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	11	PHOSPHOR BRONZE	NICKEL PLATING
4	BRASS	SILVER PLATING 2μm min.	10	BRASS	NICKEL PLATING
3	BRASS	SILVER PLATING 2μm min.	9	BRASS	NICKEL PLATING
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	8	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	NICKEL PLATING			

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : HY. KOBAYASHI			18.02.22	DRAWING NO. EDC-113405-31-00		
CHECKED : HY. KOBAYASHI			18.02.22	PART NO. HR22-12WTL P-20P(31)		
DESIGNED : HY. KISHI			18.02.21	CODE NO. CL122-0054-5-31		
DRAWN : MK. INOUE			18.02.06	1/1		