

SPECIFICATION CONTROL DRAWING

55A7308

TITLE WIRE, ELECTRIC, RADIATION-CROSSLINKED, MODIFIED, ETFE-INSULATED, SOLID SILVER-COATED HIGH STRENGTH COPPER ALLOY, SPECIAL

Date 2-16-96

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

CONDUCTOR - SILVER-COATED HIGH STRENGTH
COPPER ALLOY
SOLID

INSULATOR - RADIATION-CROSSLINKED,
MODIFIED ETFE

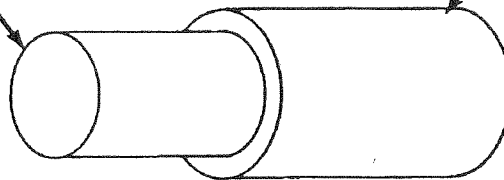


TABLE I. CONSTRUCTION DETAILS

PART NUMBER	WIRE SIZE (AWG)	NOMINAL CONDUCTOR DIAMETER (in.)	FINISHED WIRE			
			MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.)	DIAMETER (in.)		NOMINAL WEIGHT (lbs/1000 ft.)
				MINIMUM	MAXIMUM	
55A7308-30-*	30	.010	126.	.020	.024	.53
55A7308-28-*	28	.012	79.6	.023	.027	.75
55A7308-26-*	26	.016	50.5	.028	.032	1.2
55A7308-24-*	24	.020	31.4	.033	.037	1.7
55A7308-22-*	22	.025	19.9	.036	.040	2.4
55A7308-20-*	20	.032	12.3	.043	.047	3.7

TABLE II. PERFORMANCE DETAILS

PART NUMBER	BEND TESTING			
	MANDREL DIAMETER (inch) (± 3%)		WEIGHT (lb) (± 3%)	
	IMMERSION, LIFE CYCLE AND ACCELERATED AGING	COLD BEND	IMMERSION, LIFE CYCLE AND ACCELERATED AGING	COLD BEND
55A7308-30-*	.250	.375	.063	.375
55A7308-28-*	.250	.375	.063	.375
55A7308-26-*	.375	.500	.125	.375
55A7308-24-*	.375	.500	.125	.500
55A7308-22-*	.500	.750	.250	.500
55A7308-20-*	.500	.750	.250	.500

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
1-800-2 RAYCHEM FAX: 1-415-361-8297

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C,

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 ± 3°C for 7 hours

BLOCKING: 230 ± 3°C for 24 hours

COLOR: White preferred

CONCENTRICITY: 70% (minimum)

FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 in. (maximum); no flaming of facial tissue

Procedure 2, 3 seconds (maximum); 5 in. (maximum); AWG 30-22

3 seconds (maximum); 3 in. (maximum); AWG 20

HUMIDITY RESISTANCE: Insulation Resistance, 5000 megohms for 1000 ft. (minimum)

IDENTIFICATION AND COLOR STRIPING DURABILITY: 125 cycles (250 strokes)

(minimum), 500 g weight (AWG 28 and 30 are not marked)

INSULATION ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile strength, 5000 lbf/in² (minimum)

INSULATION FLAWS:

Spark Test, 3.0 kV (rms), 60 Hz

Impulse Dielectric Test, 8.0 kV (peak)

INSULATION RESISTANCE: 5000 megohms for 1000 ft. (minimum)

INSULATION THICKNESS: 0.005 in. (minimum)

LIFE CYCLE: 230 ± 3°C for 500 hours

LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours

SHRINKAGE: 230 ± 3°C, 0.125 inch (maximum)

SMOKE TEST: 250 ± 5°C, No visible smoke

SURFACE RESISTANCE: 500 megohms-in. (minimum), both readings

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL): 1500 volts (rms)

PART NUMBER:

The "***" in the part numbers on page 1 shall be replaced by a color code designator.

Example: AWG 22, white: 55A7308-22-9

AWG 22, white with black stripe: 55A7308-22-90