
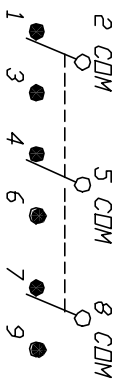
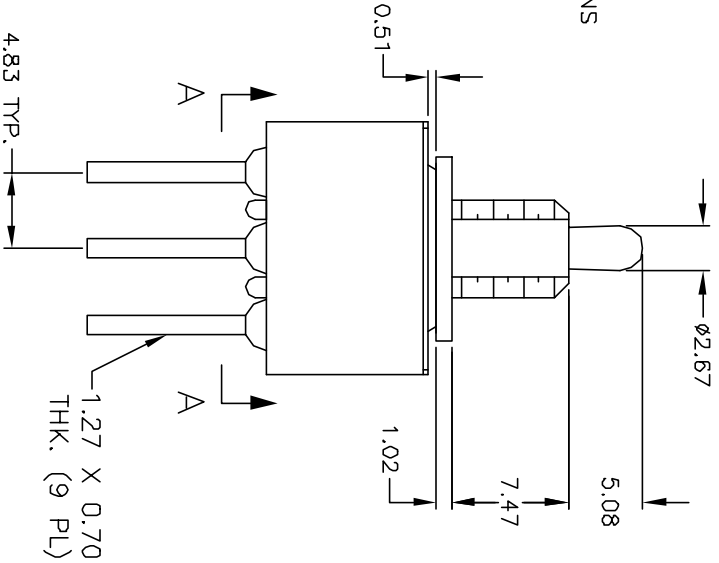


PDS. 2
PDS. 1 PDS. 3

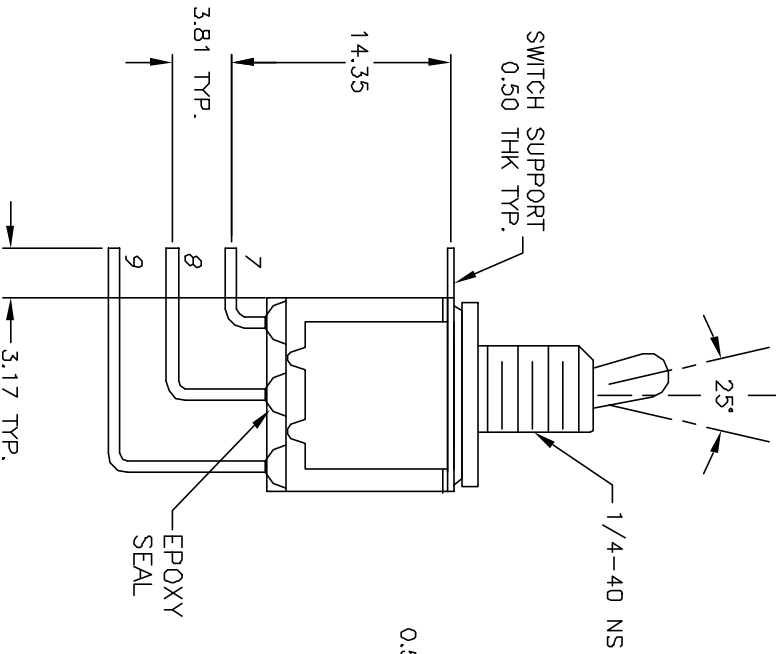

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	OFF	DN
2-3, 5-6 8-9	OPEN	2-1, 5-4 8-7

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4, X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR @28VDC; 2A @250VAC
5. ELECTRIC LIFE: 50,000 MAKE AND BREAK AT FULL LOAD.
6. INSUL. RESISTANCE: 1,000M-OHMS MIN
7. DIELECTRIC STRENGTH: 1,000V RMS @SEA LEVEL
8. OPERATING TEMP.: -30°C TO +85°C

E-SWITCH®

REV. A		11093		RELEASED FOR PRODUCTION		12/06/00		PML		TITLE		100 3P-3 T2 B9 M7 Q E		SCALE		DATE		DR		DWG		REV	
ECN No.		DESCRIPTION		DATE		CHKD		SCALE		DATE		PML		T135012		A							
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND ITS NOT TO BE COPIED OR TRANSFERRED</p>																							