

Contact insert module - HC-M-04-LCFC-M - 1419891


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Contact insert module, number of positions: 4, Pin V, application: FO, for integration of up to 4 LC simplex connectors



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 258829
GTIN	4055626258829

Technical data

Dimensions

Height	28.7 mm
Width	34 mm
Length	14.6 mm

Electrical characteristics

Connection profile	4
--------------------	---

Ambient conditions

Ambient temperature (operation)	-10 °C ... 70 °C
---------------------------------	------------------

General

Series	HC-M-04-LC
Color	light gray
Number of module slots	1
Flammability rating according to UL 94	V0
Degree of pollution	3
Overvoltage category	III

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Contact insert module - HC-M-04-LCFC-M - 1419891


Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

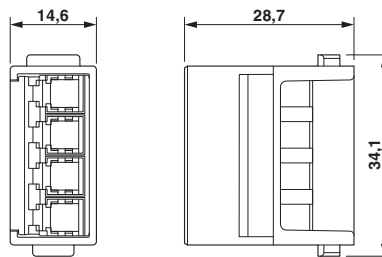

Male insert

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.AI30.B.01102
-----	--	--------------------------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>