


NOTES:

- 1. CABLE RANGE: .16 to .32 DIA. (4.1mm TO 8.1mm)
- 2. MAX CONDUCTOR SIZE: 18 AWG
- ③ 3. PART SHOWN ASSEMBLED FOR DIMENSIONAL REF. ONLY
- 4. COMPONENTS ARE SHIPPED AS UNASSEMBLED KIT

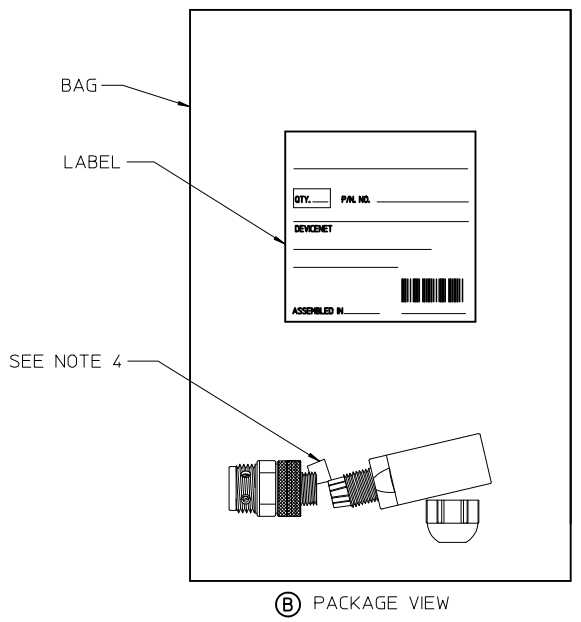

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	PACKING GLAND (GROMMET)	NITRILE RUBBER	BLACK
5	1	PACKING NUT	NYLON	BLACK
4	1	OVERMOLD	POLYAMIDE	BLACK
3	1	COUPLING NUT	BRASS	NICKEL PLATED
2	5	CONTACT SOCKET	BRASS	SILVER PLATED
1	1	INSERT, 5/C. DC KEY, FEMALE	POLYAMIDE	BLACK

REV'D NOTES: ADD PACKAGE VIEW EC NO: WNA2011-0512 DRWRNSTONE 2011/04/20 CHKDK: JOZWIK 2011/04/21 APPR: J MURPHY 2011/08/13	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± .01</td> <td>± .0005</td> </tr> <tr> <td>3 PLACES</td> <td>± .01</td> <td>± .0005</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.13</td> <td>± .01</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.25</td> <td>± .01</td> </tr> </tbody> </table> ANGULAR ±1/2°		mm	INCH	4 PLACES	± .01	± .0005	3 PLACES	± .01	± .0005	2 PLACES	± 0.13	± .01	1 PLACE	± 0.25	± .01	DIMENSION STYLE IN/MM	SCALE 3:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		mm	INCH																		
	4 PLACES	± .01	± .0005																		
	3 PLACES	± .01	± .0005																		
2 PLACES	± 0.13	± .01																			
1 PLACE	± 0.25	± .01																			
DRAWN BY: R. STONE DATE: 2007/10/11		CHECKED BY: J. MACNEIL DATE: 2007/10/16		TITLE MICRO-CHANGE 5/C FIELD ATTACHABLE MALE																	
APPROVED BY: J. MACNEIL DATE: 2007/10/16		MATERIAL NO. 848549318		MOLEX INCORPORATED DOCUMENT NO. SD-84854-020		SHEET NO. 1 OF 1															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																					