


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AF	50	P	LTR	DESCRIPTION	DATE	DWN	APVD
		G		REVISED PER ECR-12-005303	24JUL12	KH	KR

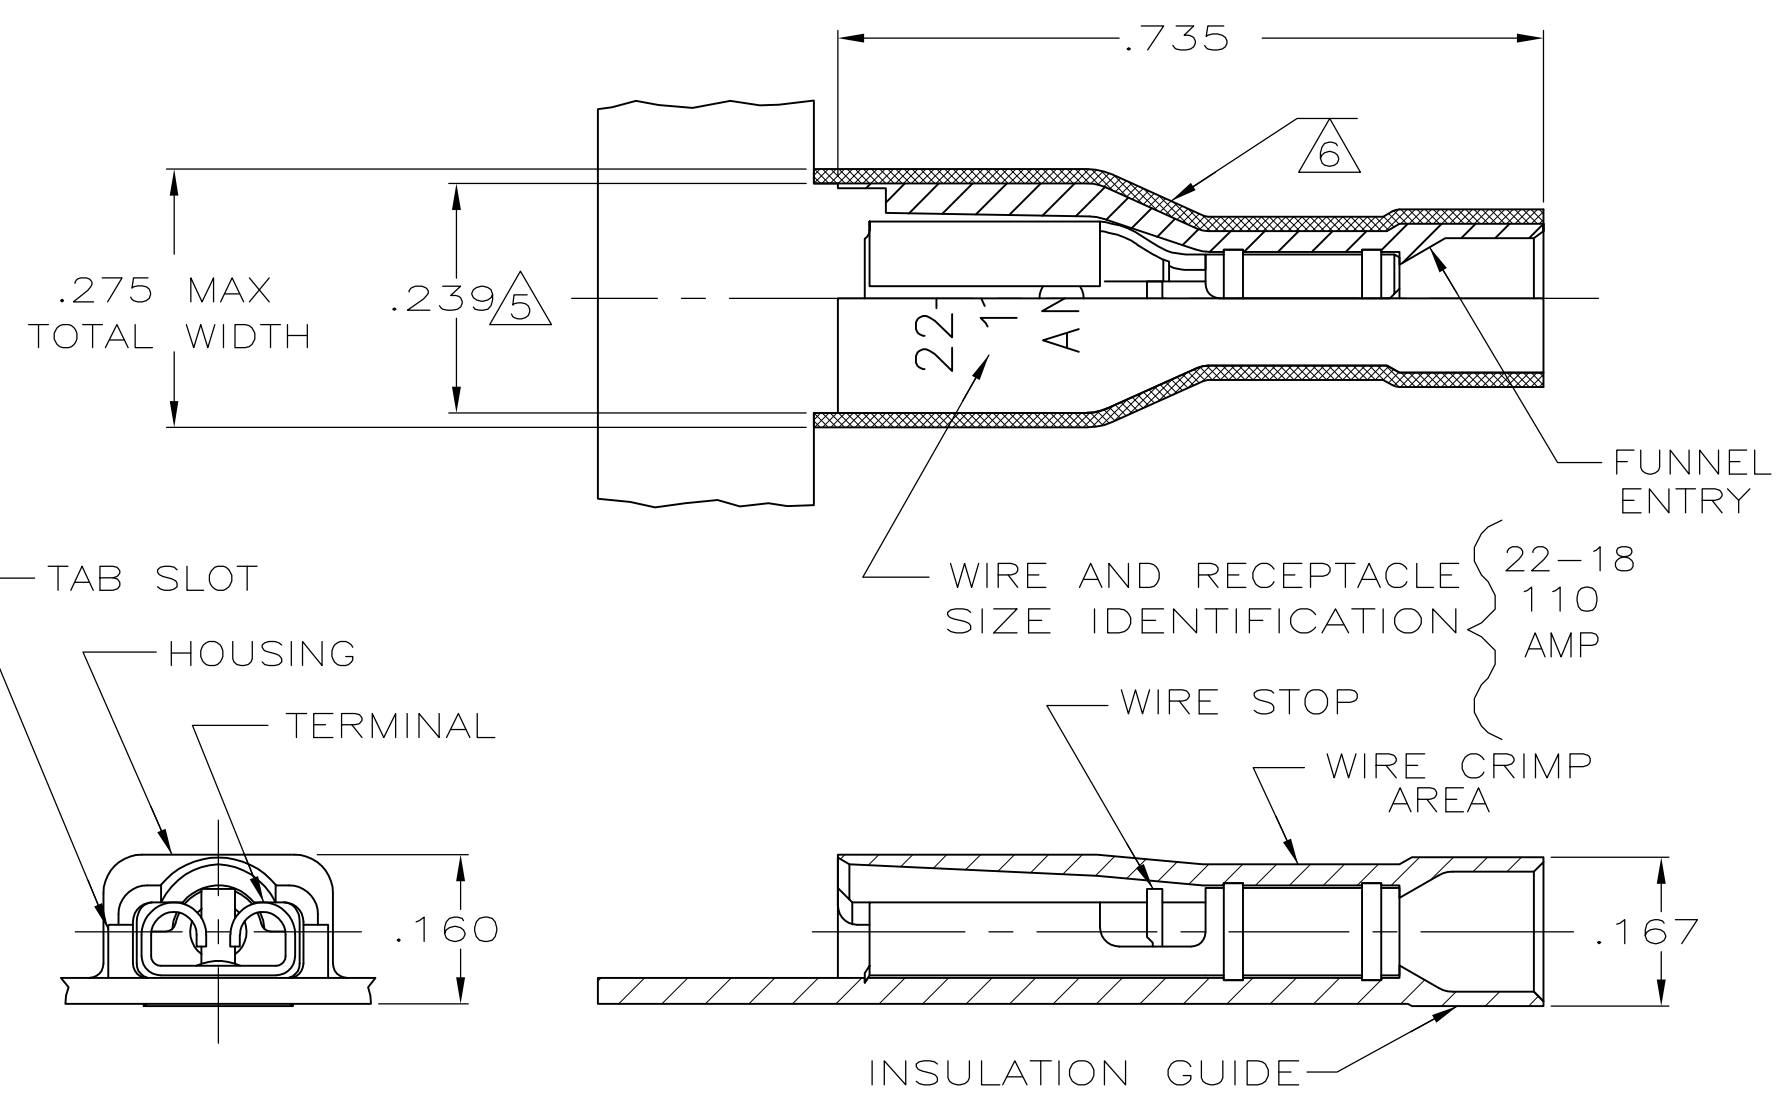

- 1 MATES WITH .032±.001X.110 OR .125 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION RANGE .060-.120
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-RED TRANSLUCENT RECEPTACLE: #3 HARD BRASS, TIN	2-520979-2
MATERIAL & FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 10/5/90	TE Connectivity RECEPTACLE ASSEMBLY, ULTRA-FAST PLUS, .110/.125 SERIES, 22-18 AWG											
DIMENSIONS: INCHES		CHK P FORTNEY 10/5/90												
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D BRATINA 10/5/90												
<table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± .015</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table>		0 PLC				± -	1 PLC	± -	2 PLC	± -	3 PLC	± .015	4 PLC	± -
0 PLC	± -													
1 PLC	± -													
2 PLC	± -													
3 PLC	± .015													
4 PLC	± -													
ANGLES	± -													
MATERIAL: SEE TABLE		FINISH: SEE TABLE	PRODUCT SPEC 108-2044	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO							
			APPLICATION SPEC 114-2123	A3	00779	C-520979	-							
			WEIGHT: -	CUSTOMER DRAWING		SCALE: 5:1	SHEET: 1 OF 1							
						REV: G								