

IB IL 120 PWR IN-PAC


Order No.: 2861454



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2861454>

Inline power terminal block, complete with accessories (connector and labeling field), without fuse, 120 V AC



Commercial data	
GTIN (EAN)	 4 017918 907402
Note	Made-to-order
sales group	K417
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 267 (AX-2009)

Product notes

WEEE/RoHS-compliant since:
12/08/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Interfaces	
Type of connection	8-pos. Inline power connector
Interface	Supply voltage

Power supply	
I/O voltage	120 V AC

Peripherals voltage range	108 V AC ... 135 V AC (including all tolerances, including ripple)
Max. current consumption	8 A

General data

Type of protection	Surge protection
Weight	80 g
Width	36.6 mm
Height	119.8 mm
Depth	71.5 mm

Inline potential routing

Main circuit supply U_M	120 V AC (nominal value)
Power supply at U_M	8 A (nominal value)

Certificates / Approvals



Certification CUL, GOST, UL

Accessories

Item	Designation	Description
------	-------------	-------------

Marking


0809492	ESL 62X10	Insert strip for laser printer, lettering field: 62 x 10 mm
2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm

Plug/Adapter


2740180	IB IL AC-PWR-IN-PLSET	Connector set, for Inline input terminal blocks with AC voltage
---------	-----------------------	---

Diagrams/Drawings

Connection diagram

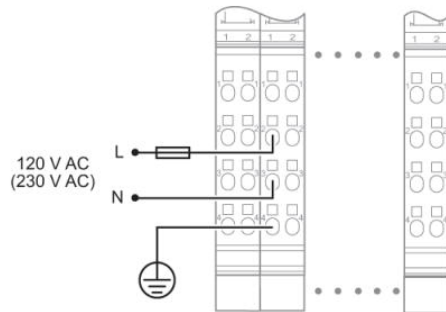

Dimensioned drawing

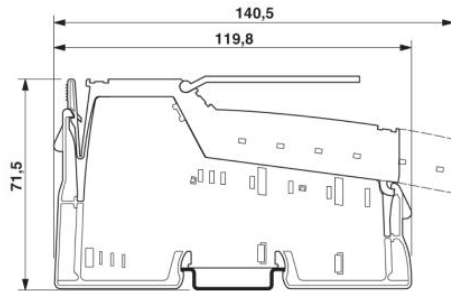

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;