

LAYOUT SHOWN AS EXAMPLE

Keying Shown as example

**CHARACTERISTICS**

- Standard : Based on MIL-DTL-38999 Series III
- Shell Material : Aluminium
- Shell Plating : Black Zinc Nickel
- Insulator : Thermoplastic
- Contacts : Copper Alloy
- Seals & Grommet : Silicon Elastomer
- Contact Plating : Gold over copper Alloy 0.8µm minimum
- Durability : 500 Mating cycles
- Delivered with Souriau contacts and Accessories
- Temperature Range : -65°C to +175°C
- Salt Spray : 500 hours
- Mass : 37.77 g ± 10%

| Connector dimension |          |
|---------------------|----------|
| Dim                 | Nominal  |
| ØS                  | 38.5 Max |
| Z                   | 31 Max   |
| VV THREAD           | M28x1-6g |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

**PN: 8D519Z11AC**

|              |            |                          |                         |
|--------------|------------|--------------------------|-------------------------|
| A            | 19-10-2016 | First Release            |                         |
| ISS          | DATE       | Latest modification - by | MOD N°                  |
| Designed By: |            | Date:                    | <b>CUSTOMER DRAWING</b> |


**TITLE** Aluminium Plug 8D series

|       |  |                            |                 |
|-------|--|----------------------------|-----------------|
| SCALE |  | General linear Tolerances: | NPRDS / PROJECT |
| NA    |  | ±--                        | <b>859</b>      |

**SOURIAU** WWW.SOURIAU.COM

This document is the property of SOURIAU it must not be reproduced or communicated without permission

|           |                                    |  |            |
|-----------|------------------------------------|--|------------|
| FORMAT    | <b>SOURIAU DRG N° 8D519Z11AC-C</b> |  | SHEET      |
| <b>A3</b> |                                    |  | <b>1/2</b> |

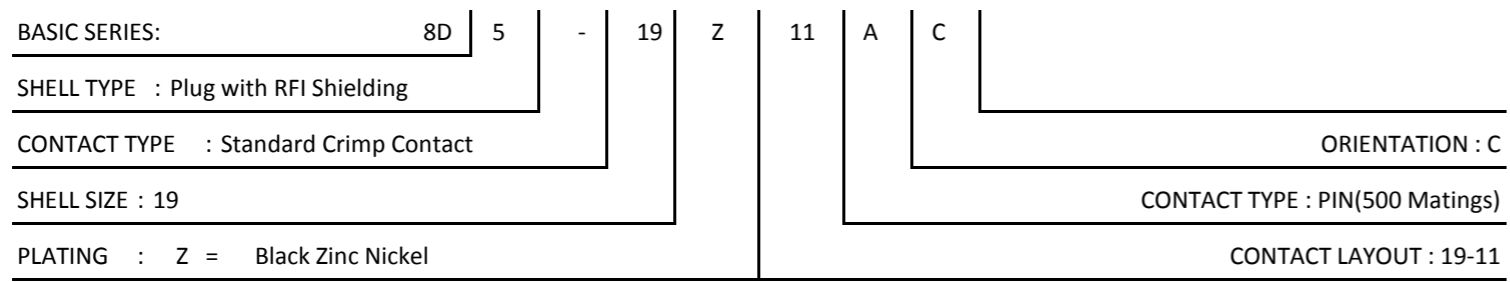

Contact Layout



| Contact position ID | Location    |             | Contact position ID | Location    |             |
|---------------------|-------------|-------------|---------------------|-------------|-------------|
|                     | X-axis (mm) | Y-axis (mm) |                     | X-axis (mm) | Y-axis (mm) |
| A                   | +105 (2.67) | +260 (6.60) | G                   | -275 (6.99) | -053 (1.35) |
| B                   | +250 (6.35) | +132 (3.35) | H                   | -250 (6.35) | +132 (3.35) |
| C                   | +275 (6.99) | -053 (1.35) | J                   | -105 (2.67) | +260 (6.60) |
| D                   | +179 (4.55) | -215 (5.46) | K                   | +000 (0.00) | +105 (2.67) |
| E                   | +000 (0.00) | -281 (7.14) | L                   | +000 (0.00) | -092 (2.34) |
| F                   | -179 (4.55) | -215 (5.46) | ---                 | ---         | ---         |

| Shell size | Arrangement no. | Number of contacts | Size contacts | Service rating | Contact location | Supersedes |
|------------|-----------------|--------------------|---------------|----------------|------------------|------------|
| 19         | -11             | 11                 | 16            | II             | All              | MS20054-11 |

SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)

| Country | Jurisdiction & Control List |
|---------|-----------------------------|
| FR      | Not Listed                  |

PN: 8D519Z11AC

|                |                                    |                            |   |
|----------------|------------------------------------|----------------------------|---|
| A              | 19-10-2016                         | First Release              |   |
| ISS            | DATE                               | Latest modification - by   | MOD N°  |
| Designed By:   |                                    | Date:                      | <b>CUSTOMER DRAWING</b>   |
| <b>TITLE</b>   | Aluminium Plug 8D series           |                            |   |
| SCALE          |                                    | General linear Tolerances: | NPRDS / PROJECT   |
| NA             |                                    | ±--                        | <b>859</b>  |
| <b>SOURIAU</b> | <b>WWW.SOURIAU.COM</b>             |                            | This document is the property of SOURIAU it must not be reproduced or communicated without permission |
| FORMAT         | <b>SOURIAU DRG N° 8D519Z11AC-C</b> |                            | SHEET 2/2   |