
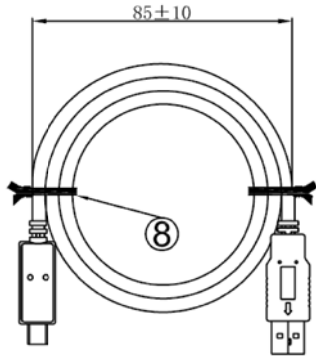


UNIT:mm

CABLE MARK:E468041 AWM STYLE 2725 80°C 30V VW-1 SUPER HIGH SPEED USB Revision 3.1 SINO SYNC5

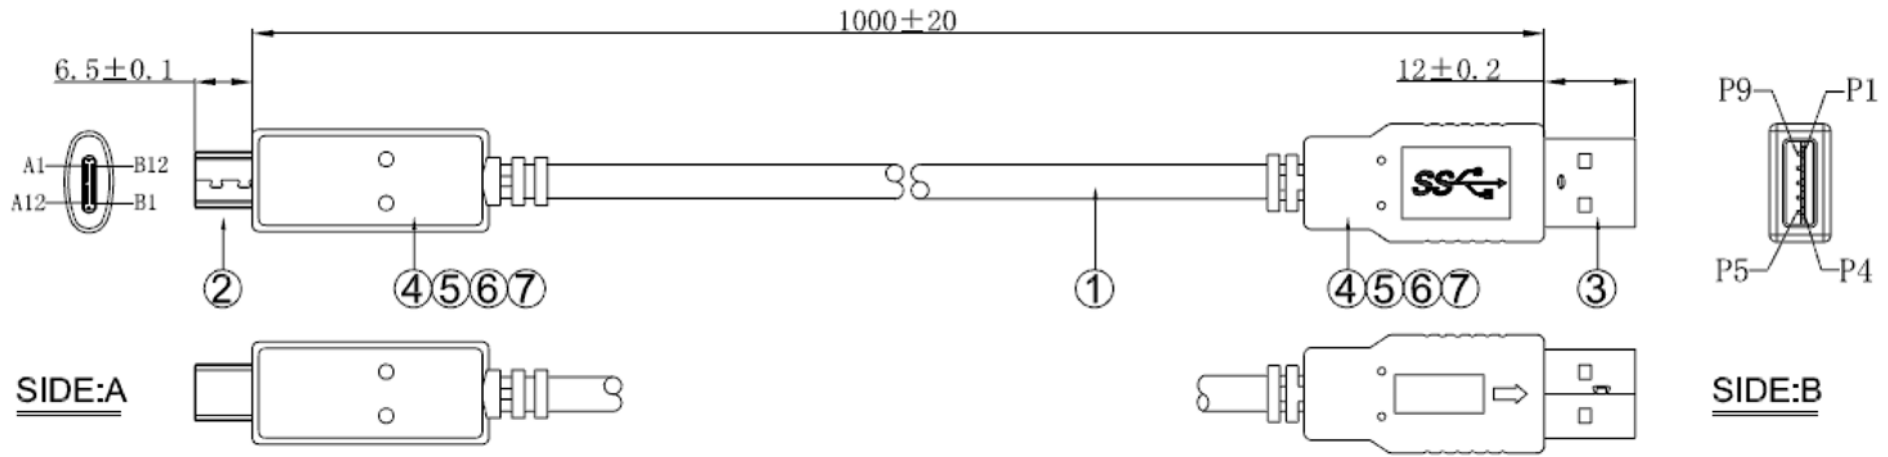

200pcs/carton

PIN ASSIGNMENT

SIDE:A TYPE C		SIDE:B TYPE C
A4+B4+A9+B9	RED	1
A6	GREEN	3
A7	WHITE	2
A1+B1+A12+B12	BLACK	4+7
A2	YELLOW	6
A1+B1+A12+B12	YELLOW(twine)	4+7
A3	BLUE	5
A1+B1+A12+B12	BLUE(twine)	4+7
B10	PURPLE	8
A1+B1+A12+B12	PURPLE(twine)	4+7
B11	ORANGE	9
A1+B1+A12+B12	ORANGE(twine)	4+7
SHELL	WIRE+BRAID	SHELL

Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance:2 ohm max.
- 3.Insulation Resistance:5M ohm min.
- 4.Hi-Pot:300V DC/10ms

NO.	NAME	Q'TY	SPECIFICATION
⑧	TIE	2	BLACK L=50mm.
⑦	TUBE	2	HEAT SHRINK TUBE BLACK OD2.0*L=6mm.
⑥	TUBE	2	HEAT SHRINK TUBE BLACK OD1.0*L=10mm.
⑤	OUT JACKET	17g	OUTER MOLD:45P PVC COLOR:BLACK
④	IN JACKET	8g	OUTER MOLD:45P PVC COLOR:BLACK
③	CONN	1	USB3.1 A TYPE PIN-G/F SHELL-NICKEL
②	CONN	1	USB3.1 C TYPE PIN-G/F INSULATION COLOR:BLUE SHELL-NICKEL
①	CABLE	1	(7/0.08TC*1C+SP+AL+HMAM)*4COAX+7/0.06TC*1P+7/0.127TC*2C+FILL+AB PVC JACKET:BLACK OD3.8mm

CnC Tech, LLC
Industrial Cable and Connector Technology

DRAWN BY	H S F	DARWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	105-1032-BL-00100
DECIDE BY		DATE	2015-04-22
VERSIONS/EDITEON	A/1	PROJECTION	