

CUSTOMER PRINT


PART NUMBER: DBR4S3-XFAM

| PART NO. | "X" DIM. |
|-----------|---------------|
| DBR4S3-6 | 6 FT. ±2 IN. |
| DBR4S3-10 | 10 FT. ±3 IN. |
| DBR4S3-12 | 12 FT. ±4 IN. |
| DBR4S3-20 | 20 FT. ±6 IN. |
| DBR4S3- | |

LENGTH IN FEET

NOTES:

1. FINISHED PRODUCT TO BE COILED AND BULK PACKED UP TO 5 ASSEMBLIES PER BAG. HARDWARE KIT WITH (2) O-RINGS, (2) CAP SCREWS, AND (2) BUSHINGS IS INCLUDED WITH EACH DIE BLOCK.
2. FOR PART NUMBER SEE TABLE.
3. ALL DIMENSIONS REFERENCE UNLESS OTHERWISE SPECIFIED.
4. OVERMOLD BOOT MATERIAL: POLYURETHANE WITH YELLOW COLORANT.
5. ELECTRICAL TEST
 - a) PIN TO WIRE CONTINUITY
 - b) HI-POT @1500V DC ALL CONTACTS TO EACH OTHER (CELL SET-UP AND LOT SAMPLING)

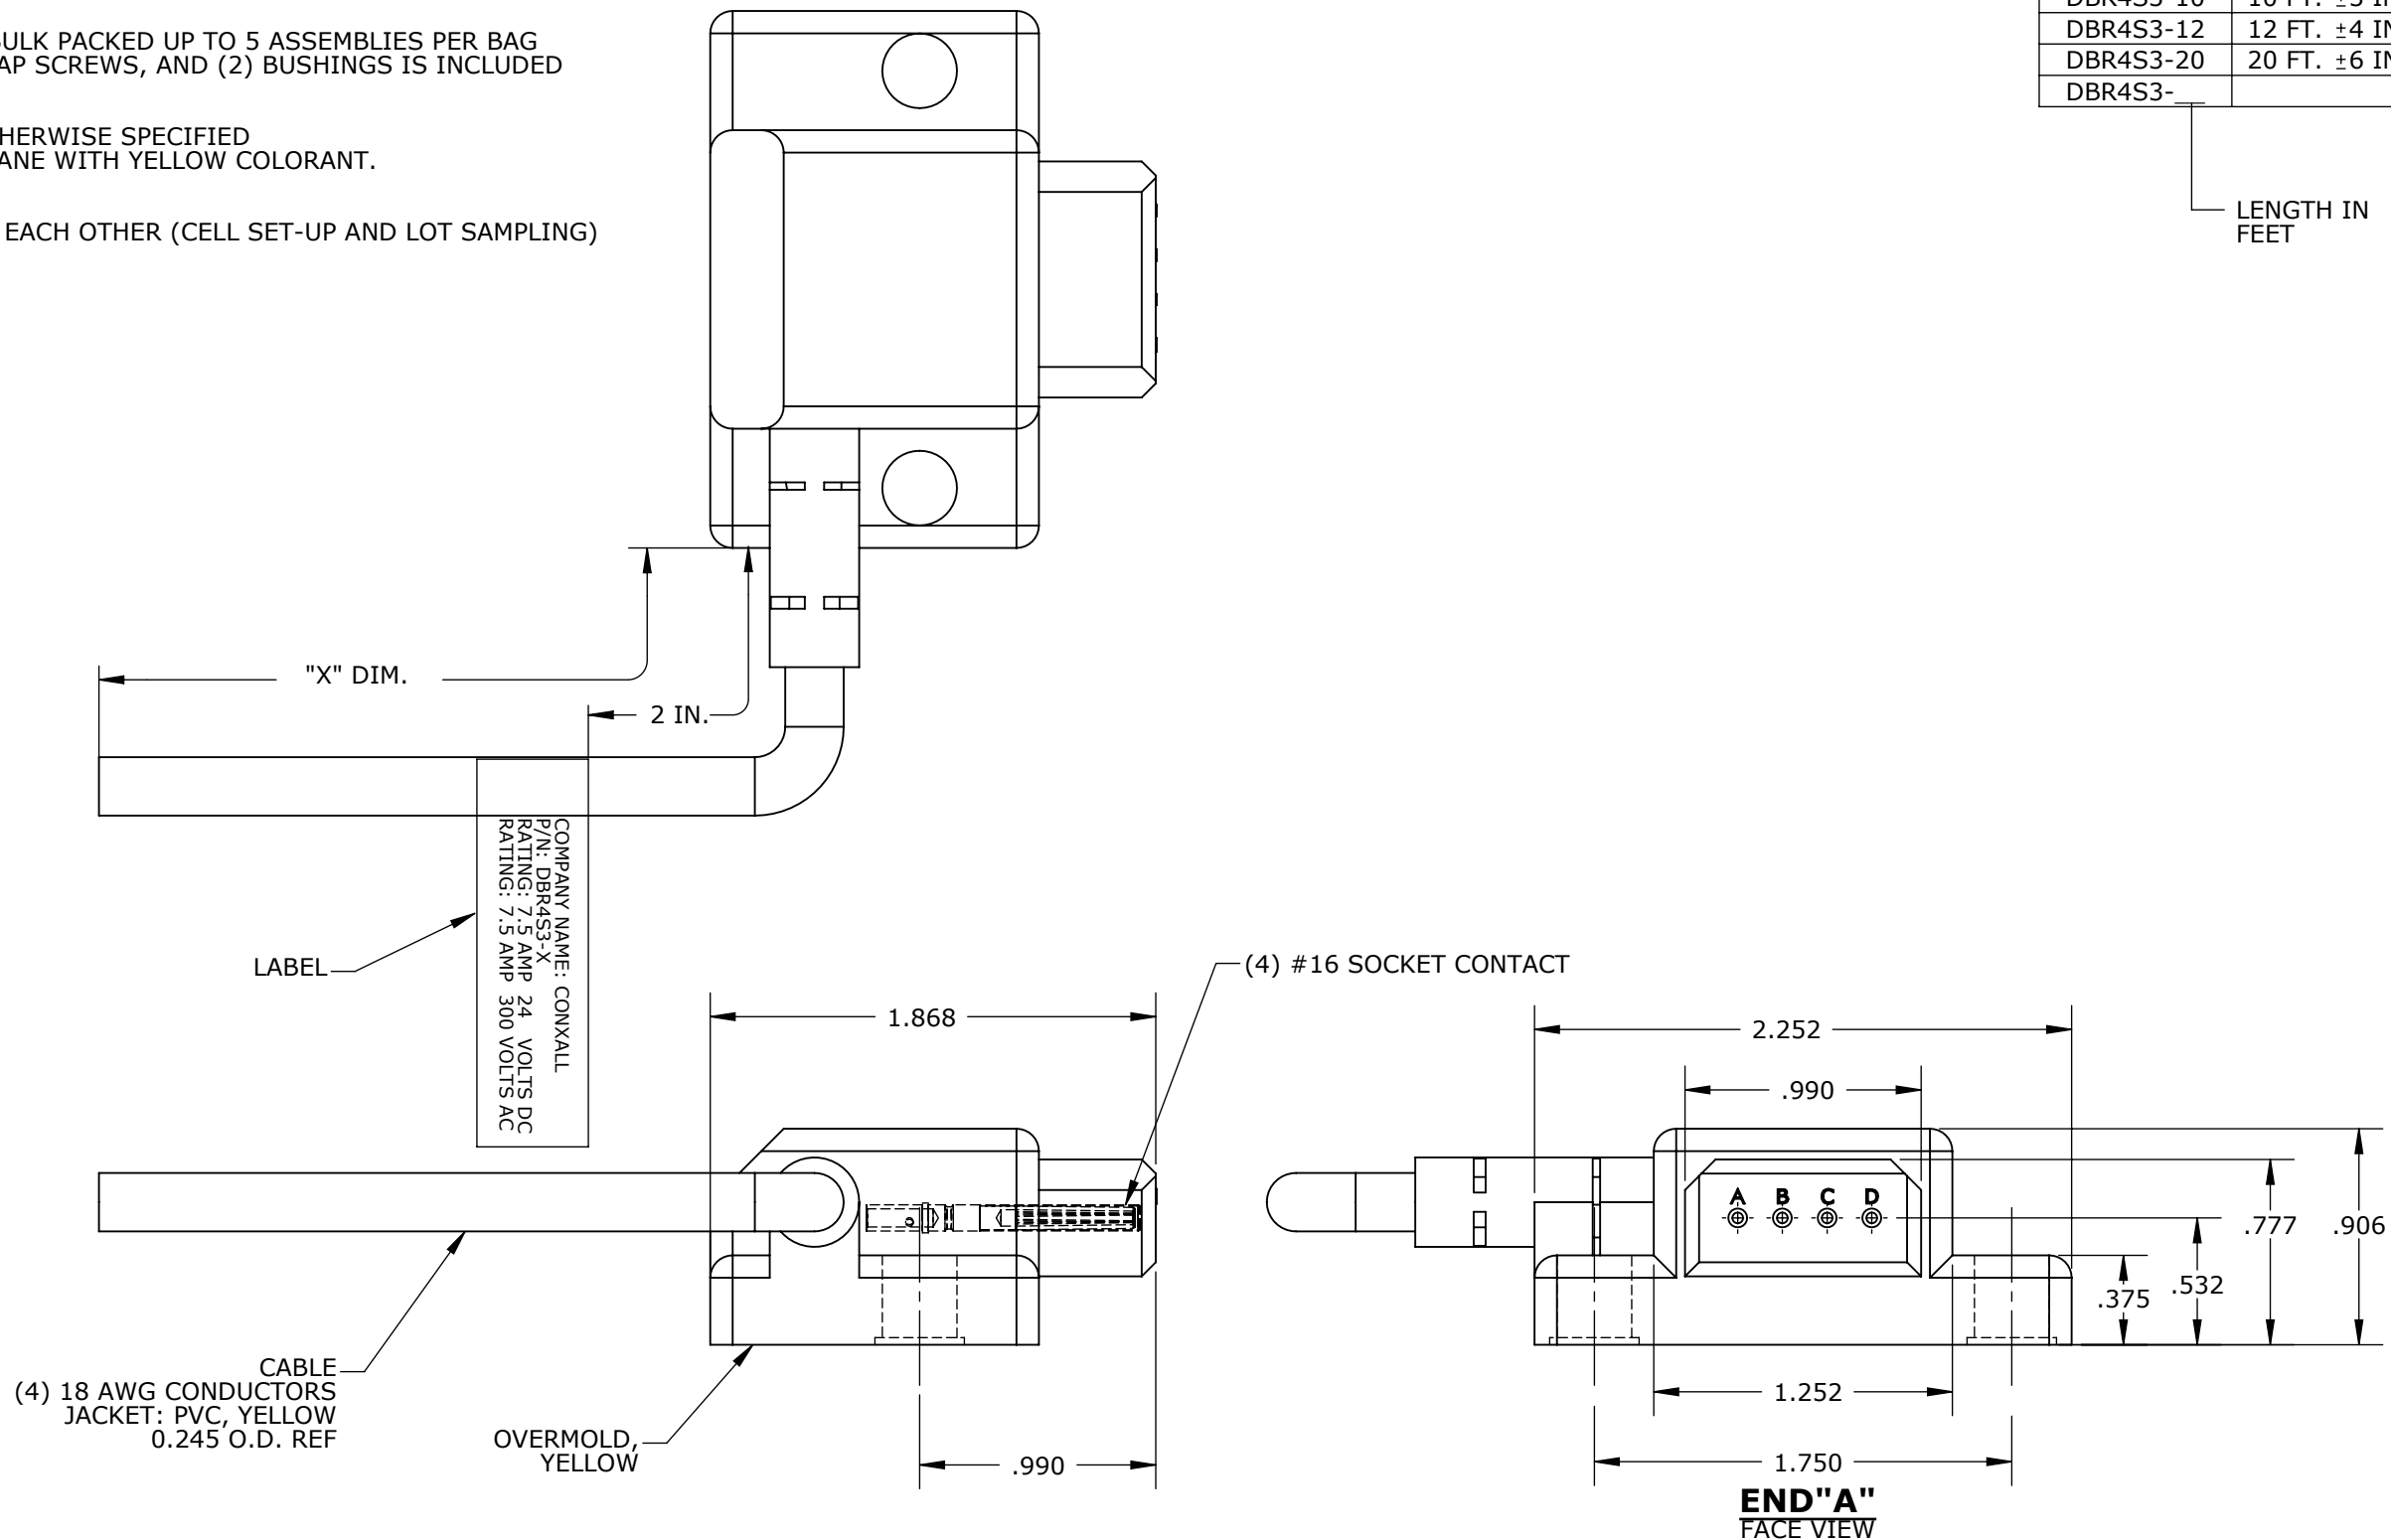

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____

DATE: _____

| REV. | INIT. | DATE | DESCRIPTION |
|------|-------|----------|--|
| D | BZ | 01-12-11 | UPDATED MANUFACTURING DRAWING PER ECR 7731 |
| C | BZ | 11-04-09 | UPDATED MANUFACTURING DRAWING PER ECR 7297 |
| B | BZ | 06-03-09 | REMOVED HARDWARE FROM DRAWING, UPDATED NOTE 1 PER ECR 7211 |

| | | |
|--|--|--|
| ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF CONXALL CORPORATION. UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED. | ORIG. DRAWN BY: BZ DATE: 04-03-09 CHECKED BY: | 601 E. WILDWOOD VILLA PARK, IL 60181 |
| ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS. | APPROVED BY: SCALE: NTS SIZE: B SHEET: 1 OF 1 | |
| FILE: DBR4S3-XFAM DIRECTORY: SLW | | TITLE: CABLE ASSEMBLY (YELLOW) 4 POLE, 90° FEMALE DIE BLOCK CUSTOMER: STANDARD PRODUCT PART NUMBER: DBR4S3-XFAM |

| WIRE COLOR CODE, END "A" | | | |
|--------------------------|---------|--------|--------|
| POS. A | POS. B | POS. C | POS. D |
| RED/BLK | RED/WHT | RED | GRN |

△ - CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX

REV D