


Steward

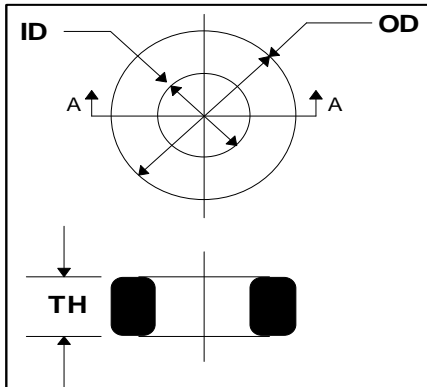

CORE DIMENSIONS

UNCOATED CORE		35T0231-000			
	MM	INCHES		MM	INCHES
OD	5.84	(.230)	±	.15	(.006)
ID	3.05	(.120)	±	.13	(.005)
TH	1.52	(.060)	±	.13	(.005)
SINGLE PARYLENE COATING		35T0231-00P			
OD	5.87	(.231)	±	.15	(.006)
ID	3.02	(.119)	±	.13	(.005)
TH	1.55	(.061)	±	.13	(.005)

WEIGHT / K 0.32 LBS
 INITIAL PERMEABILITY 5000

ELECTRICAL SPECIFICATION

	MIN (μH)	MIN TOL.	NOM (μH)	MAX (μH)	MAX TOL.	FREQ. (kHz)	VOLT. (V)	URNS
L	.793	(-20%)	.991	1.190	(+20%)	100	≤ .00046	1
Q	10		-	-		100	≤ .00046	1

COATING SPECIFICATIONS

TYPE	Max. Coating (mils.)	Min. DLB VAC	TEST FORCE (LB)
PARYLENE	0.5	1000	0.30

NOTES:



Rev	Description	Date	INT
A	Original Draft	7/11/1995	JBE
B	REVISE PRINT	7/11/1995	JBE
C	UPDATE PRINT FORMAT	7/11/1995	JBE
D	TRANSFER TO LOTUS NOTES	11/19/1997	IS
E	RE-ACTIVATE PRINT REMOVE Q SPECS CHANGE PART NUMBER	10/5/2005	JRK
F	Revised Template	6/1/2006	WMM

Date: 6/1/2006	DWG # 35T0231-00P-F	Rev:
Drawn By: WMM	Title # 35T0231-00P	F

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

UNCONTROLLED DOCUMENT