


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0402 X7R 100nF 6.3V(0402B104K6R3CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @6.3V, 120sec)

Item	Spec
Cap [nF]	100(±10%)
DF	≤ 10%
IR [G-ohm]	>1


3. Impedance/ESR-Frequency

(Equipment: 4294A)

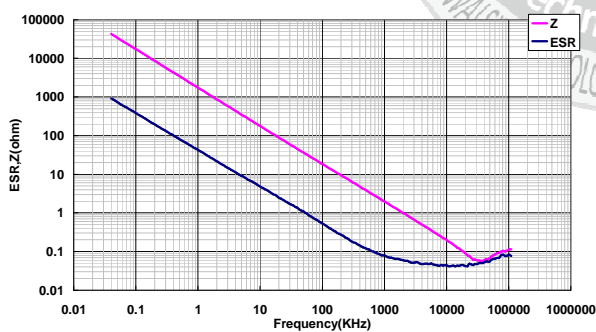

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

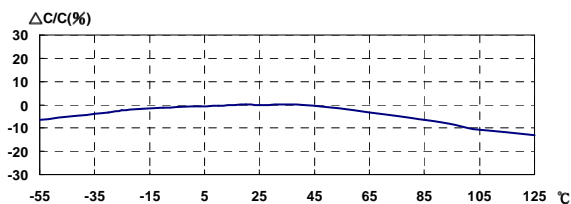

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

3.15V : 1.82% ; 6.3V : -12.02%

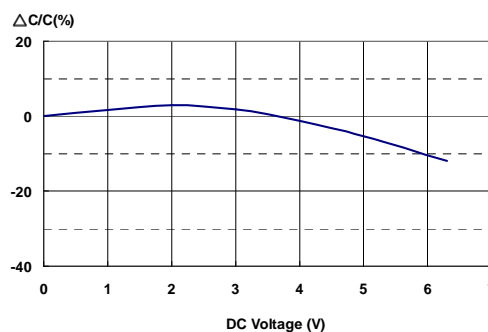

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

