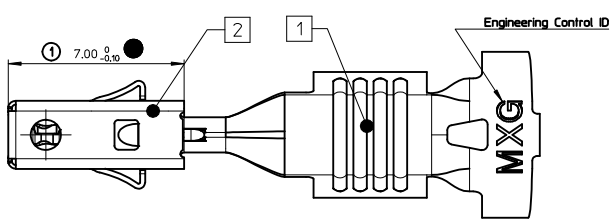

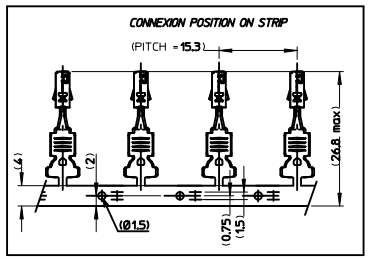

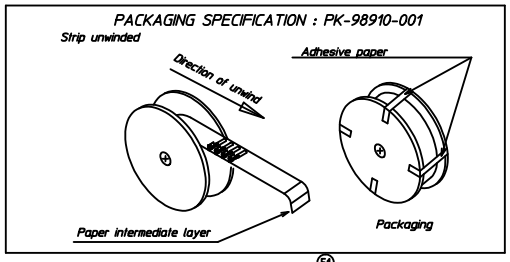

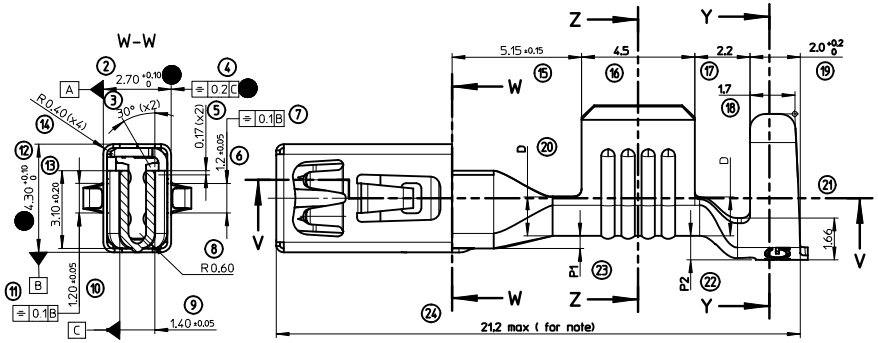





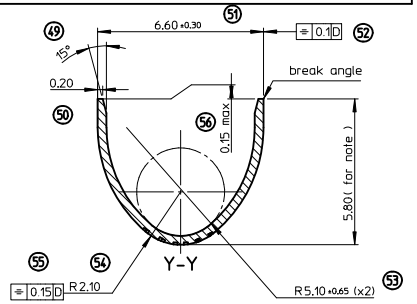

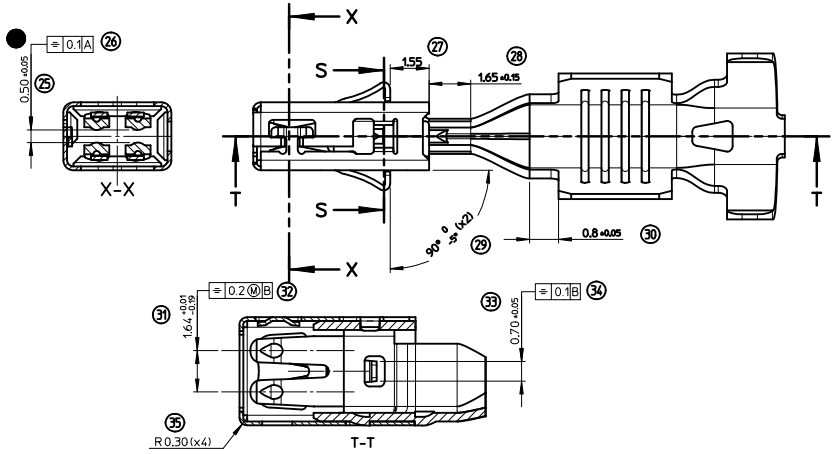



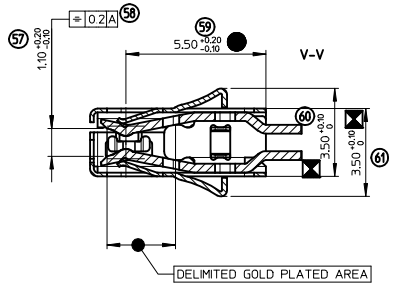

NOTE:
- CRIMPING SPECIFICATION ACCORDING TO AS-64324-001

2	BOX TERMINAL	STAINLESS STEEL thickness : 0.15 mm
1	BODY TERMINAL	HIGH CONDUCTIVITY COPPER ALLOY thickness : 0.35 mm
MARK	DESIGNATION	MATERIAL

MATERIAL NUMBER	PLATING			CRIMPING RANGE (mm2)	A ±0.2	B	rC ±0.1	D ±0.1	P1 ±0.1	P2 ±0.1	WEIGHT (g)	Identifcation
	CONTACT AREA	CRIMPING AREA	UNDERLAYER									
0643241119	Au 1.27µ MINI	Sn	Ni	>3 TO 5	5.0	5.2	1.3	1.55	0.5	0.95	0.4902	D
0643241019	Sn	Sn									0.4795	
0643241129	Au 1.27µ MINI	Sn	Ni	>2 TO 3	4.1	4.4	1.0	1.45	0.5	0.95	0.4604	C
0643241029	Sn	Sn									0.4470	
0643241139	Au 1.27µ MINI	Sn	Ni	>1 TO 2	4.1	3.5	0.9	1.3	0.6	1.3 +0.1 -0.2	0.4274	B
0643241039	Sn	Sn									0.4191	
0643241149	Au 1.27µ MINI	Sn	Ni	0.50 TO 1	2.8	2.6	0.7	1.1	0.6	1.3	0.3916	A
0643241049	Sn	Sn									0.3815	

crimp range identification



(SKC) COTES CARACTERISTIQUES SPECIALES
SPECIAL KEY CHARACTERISTICS
INDICATION DIMENSIONS S.P.C
DENOTES S.P.C DIMENSIONS
INDICATION DIMENSIONS CRITIQUES
DENOTES CRITICAL DIMENSIONS
INDICATION DIMENSIONS FONCTIONNELLES
DENOTES FUNCTIONAL DIMENSIONS

QUANTITE PAR FEUILLE INDIVIDUELLE
QUANTITY PER INDIVIDUAL SHEET
2 0 6 (SKC) 0

REVISED
EC NO: G2012-0072
DRWN:PBOSQUAIN 2011/11/23
CHKD:OPLESSIS 2011/11/23
APPR:CBOUCHAN 2012/01/04
DESCRIPTION
REV
D

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.10	± ---
1 PLACE	± 0.1	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 10:1
DESIGN UNITS: METRIC
FIRST ANGLE PROJECTION

DRAWN BY	VGUERIN
DATE	2007/11/07
CHECKED BY	FPAROLARI
DATE	2007/11/07
APPROVED BY	LSTICKEIR
DATE	2007/11/07

TITLE: CP RCPT TRM 2.8

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-64324-001
SHEET NO.: 1 OF 1
SIZE: A1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

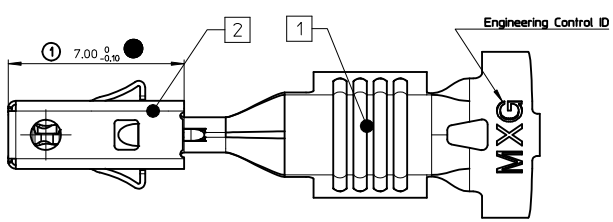

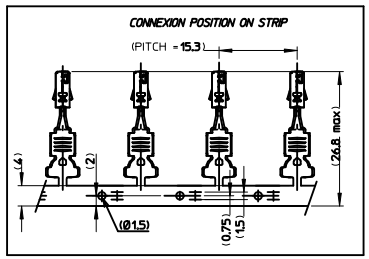

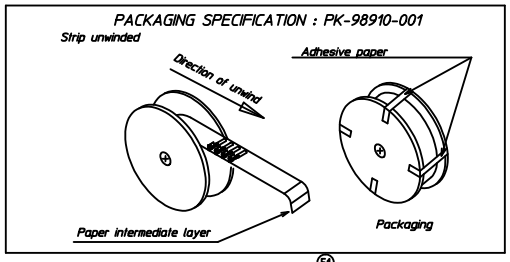

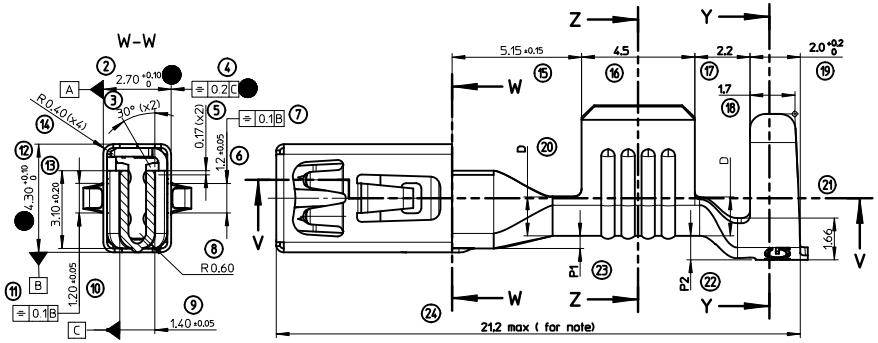





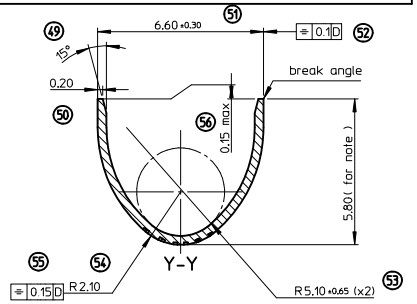

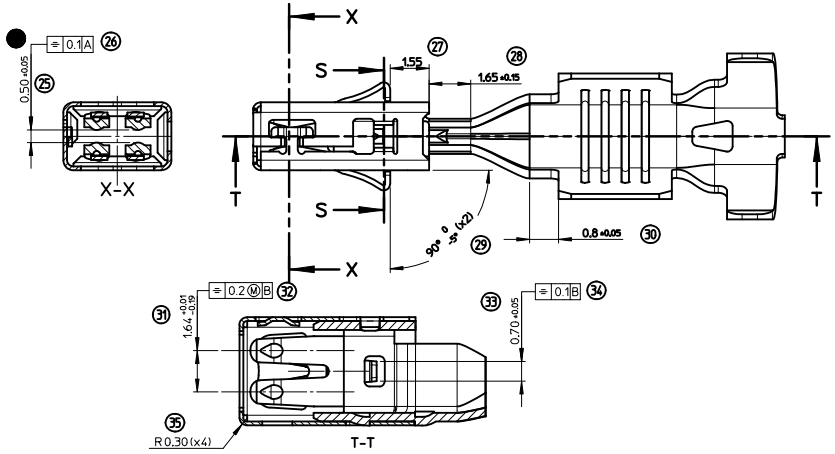



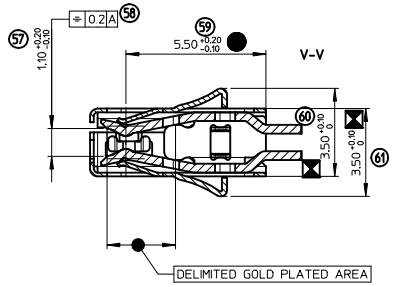

NOTE:
- CRIMPING SPECIFICATION ACCORDING TO AS-64324-001

2	BOX TERMINAL	STAINLESS STEEL thickness : 0.15 mm
1	BODY TERMINAL	HIGH CONDUCTIVITY COPPER ALLOY thickness : 0.35 mm
MARK	DESIGNATION	MATERIAL

MATERIAL NUMBER	PLATING			CRIMPING RANGE (mm2)	A ±0.2	B	rC ±0.1	D ±0.1	P1 ±0.1	P2 ±0.1	WEIGHT (g)	Identifcation
	CONTACT AREA	CRIMPING AREA	UNDERLAYER									
0643241119	Au 1.27µ MINI	Sn	Ni	>3 TO 5	5.0	5.2	1.3	1.55	0.5	0.95	0.4902	D
0643241019	Sn	Sn									0.4795	
0643241129	Au 1.27µ MINI	Sn	Ni	>2 TO 3	4.1	4.4	1.0	1.45	0.5	0.95	0.4604	C
0643241029	Sn	Sn									0.4470	
0643241139	Au 1.27µ MINI	Sn	Ni	>1 TO 2	4.1	3.5	0.9	1.3	0.6	1.3 +0.1 -0.2	0.4274	B
0643241039	Sn	Sn									0.4191	
0643241149	Au 1.27µ MINI	Sn	Ni	0.50 TO 1	2.8	2.6	0.7	1.1	0.6	1.3	0.3916	A
0643241049	Sn	Sn									0.3815	

crimp range identification



(SKC) COTES CARACTERISTIQUES SPECIALES
SPECIAL KEY CHARACTERISTICS
INDICATION DIMENSIONS S.P.C
DENOTES S.P.C DIMENSIONS
INDICATION DIMENSIONS CRITIQUES
DENOTES CRITICAL DIMENSIONS
INDICATION DIMENSIONS FONCTIONNELLES
DENOTES FUNCTIONAL DIMENSIONS

QUANTITE PAR FEUILLE INDIVIDUELLE
QUANTITY PER INDIVIDUAL SHEET
2 0 6 (SKC) 0

REVISED
EC NO: G2012-0072
DRWN:PBOSQUAIN 2011/11/23
CHKD:OPLESSIS 2011/11/23
APPR:CBOUCHAN 2012/01/04
DESCRIPTION
REV
D

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.10	± ---
1 PLACE	± 0.1	± ---
ANGULAR ± 2 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 10:1
DESIGN UNITS: METRIC
FIRST ANGLE PROJECTION

DRAWN BY	VGUERIN
DATE	2007/11/07
CHECKED BY	FPAROLARI
DATE	2007/11/07
APPROVED BY	LSTICKEIR
DATE	2007/11/07

TITLE: CP RCPT TRM 2.8

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-64324-001
SHEET NO.: 1 OF 1
SIZE: A1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION